
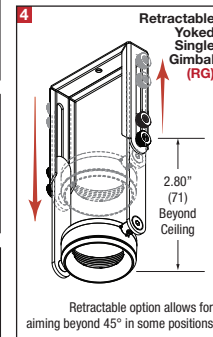
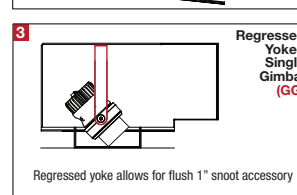
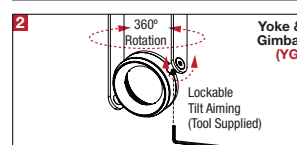
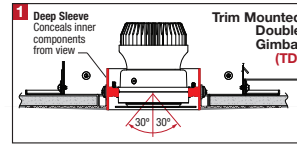


PROJECT

TYPE

CATALOG NUMBER

Measurements in () are metric equivalents.

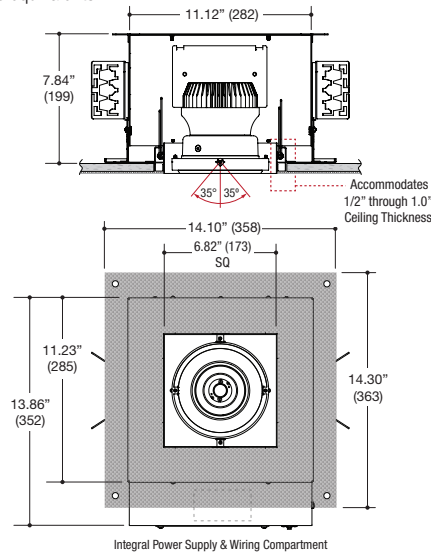

DESCRIPTION

- One light recessed accent / downlight - Large size
- All steel 18GA construction with powder coat finish
- Trimless insert with 6.82" x 56.82" open aperture
- Perforated metal mesh frame for mudding right to the aperture
- Vent holes for cooler operating temperature
- Trimless insert features deep sleeve to conceal inner components
- Insert sleeve removable for maintenance
- **Ceiling Cut-Out - 8.10" X 8.10"**

LED Source

- Field-replaceable integral LED module
- Field-changeable optic
- CREE
- Accepts up to 2 or more optical accessories
- Double gimbal lamp holder with lockable tilt aiming
- Trim mounted double gimbal standard with optional single gimbal flush yoke, regressed yoke or adjusting retractable yoke



ELECTRICAL

- Field-replaceable integral LED driver
- Electrical wiring compartment integrated into housing construction
- Thermal protection
- Easy maintenance access through ceiling opening
- Rated for through-branch wiring
- Dimmable

MOUNTING

- Butterfly brackets for commercial installation in drywall and other mud in ceiling types
- Heavy-Duty **L-Bars™** hanger bar system ordered separately
- **LF #LBARS4PK**
- Continuously variable plate adjusts for 1/2" through 1.0" ceilings

LABELS

- Suitable for damp location

5 YEAR WARRANTY

Limited



ORDERING INFO

SERIES	LED MODULE WATTAGE AND INFORMATION	CRI / COLOR	BEAM	HSG TYPE	DRIVER / VOLTAGE	FINISH	OPTIONS
MN31DN-S New Construction Housing	CREE 26C 26W LED / 2710lm 34C 34W LED / 3299lm	8027 80CRI / 2700K 8030 80CRI / 3000K 8035 80CRI / 3500K 8040 80CRI / 4000K 9227 92CRI / 2700K 9230 92CRI / 3000K 9235 92CRI / 3500K 9240 92CRI / 4000K	N Narrow 10° M Medium 21° W Wide 46°	TD Trim Mounted Double Gimbal YG Yoke Gimbal Flush to Ceiling Line GG Regressed Yoked Gimbal*	DMU Dimming Multiple Forward/Reverse Phase (@ 120V only) 0-10V Wires Present (@ 120-277V) D31 Lutron LTEA Hi-lume... Forward Phase 1% (@ 120V only) DEU Lutron LDE1/PEQ1 Hi-lume... EcoSystem... 1% with Soft-On, Fade-to-Black...	BB Black WW White	IC Insulated Ceiling (MN31DA-S Only)
MN31DA-S New Construction Air-tight Housing	Delivered @ 80CRI / 3000K Narrow Beam						
MULTIFORMS MF350 Series Recessed 1-Light Straight Aperture Adjustable Accent Trimless Fixture	CREE 40C 40W LED / 4206lm Delivered @ 80CRI / 3000K Narrow Beam		N Narrow 9° M Medium 18° W Wide 31°	RG Retractable Yoked Gimbal * Required to enable flush appearance with snoot accessory.			

Example: **MN31DA-S-26C-8027-N-TD-DMU-BB**

©2021 LF ILLUMINATION LLC

We reserve the right to change or withdraw specifications without prior notice.

HEADQUARTERS
9200 Deering Avenue
Chatsworth CA 91311

Telephone: 818-885-1335
Toll Free: 855-885-1335
Fax: 818-576-1335

www.lfillumination.com
rev: 101321