

PROJECT

TYPE

CATALOG NUMBER

Measurements in ( ) are metric equivalents.

## Specifications

### SPOTLIGHT

- 2.45" diameter cylinder
- 125° x 100° arm articulation - Friction lock
- 90° x 90° head rotation
- Aluminum optical housing
- Articulating arm allows for greater aiming
- Powder coat finish

### LAMPS (not included)

- 12V MR16 50W max - Derate Labels Available
- LED Retrofit 15W max - Works with SORAA®
- Easy relamping via front ring snap-in catch action
- Accepts up to 2 optical accessories dependent on lamp

### ELECTRICAL

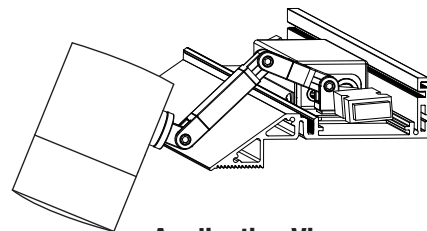
- Electronic transformer
- Tandem enclosure
- ELV dimmable

### MOUNTING

- Die-cast aluminum extension arm
- Side channel magnetic mount
- Designed for EF400 channel (Sold Separately)

### LABELS

- Suitable for damp location

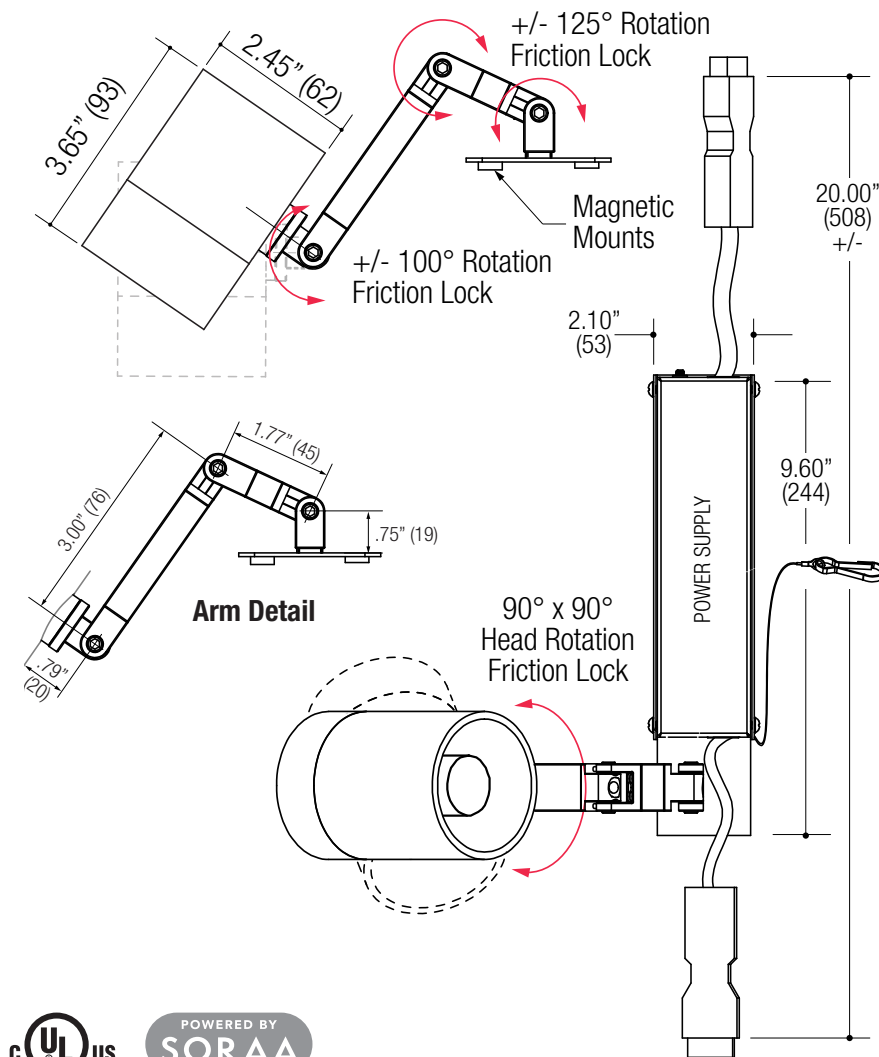

**Application View**

(EF400 System Channel Shown)

**PLEASE NOTE THAT STARTERS AND JUMPERS ARE REQUIRED FOR THE EF ACCENT HEADS TO MAKE A COMPLETE FUNCTIONING SYSTEM.**

**SEE LINK HERE FOR MORE INFO:**

**[EF-Accent-Starter\\_Jumper-111121.pdf](#)**  
**([lfillumination.com](#))**


 POWERED BY  
**SORAA**

## MAGNETIC MOUNT

### ORDERING INFO

SERIES	WATTAGE / LAMP	POWER SUPPLY	VOLTAGE	FINISH
<b>EF407B</b>	<b>020MR16X</b> MR16 20W	<b>ET</b> Electronic Transformer	<b>1</b> 120V <b>2</b> 277V	<b>WW</b> White <b>BB</b> Black  Consult factory for custom colors. Minimum order required.
	<b>035MR16X</b> MR16 35W			
	<b>050MR16X</b> MR16 50W			
	<b>015MR16X</b> MR16 15W LED Retrofit			
<b>EF407B</b> Cylindrical Small Aluminum Housing Variable Adjustment				

 Ordering Example: **EF407B-050MR16X-ET-1-BB**