


PROJECT

TYPE

CATALOG NUMBER

Measurements in () are metric equivalents.

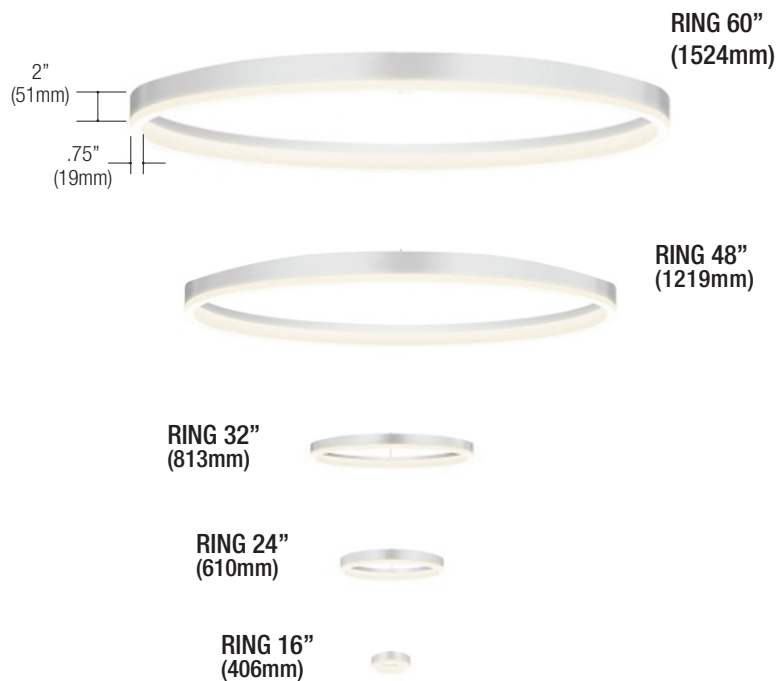

Specifications

CONSTRUCTION

- Die formed circular steel LED housing
- Molded satin acrylic lens
- Spun steel canopy and driver enclosure
- Powder coat finish

LED SOURCE

- LED strip circumferentially mounted
- 14W / 823lm, 90CRI / 3000K - 16" Diameter
- 25W / 1419lm, 90CRI / 3000K - 24" Diameter
- 29W / 1581lm, 90CRI / 3000K - 32" Diameter
- 44W / 2337lm, 90CRI / 3000K - 48" Diameter
- 62W / 3567lm, 90CRI / 3000K - 60" Diameter

ELECTRICAL

- Field accessible junction box wiring with power supply enclosure, access from below
- Integral thermo protection
- LED driver located in Ø5" x 1.75" tall canopy

MOUNTING


- Canopy mounted directly to junction box
- Canopy, 6' aircraft cable, cable grip hardware (adjustable) and power lead

LABELS


- Suitable for damp location

RINGER SUSPENSION

**3 CABLE
CANOPY SUSPENSION**
16" RING
24" RING
32" RING
48" RING



**4 CABLE
CANOPY SUSPENSION**
60" RING



**5 YEAR
WARRANTY**
Limited



ORDERING INFO

SERIES	WATTAGE / SIZE	CRI / COLOR	POWER SUPPLY	FINISH
RINGER GlowSTX™ Ringer Pendant Mount Ambient Lighting	14L 16" diameter 14W LED / 823lm (@ 90CRI min / 3000K) Delivered	9030 90CRI / 3000K (Other color temperatures available with special orders)	DMU Dimming Multiple Forward/Reverse Phase (@ 120V only) 0-10V Wires Present (@ 120-277V) *Not available in 62L - 60" Ring	SS Silver (White or Black finish available with special orders)
	25L 24" diameter 25W LED / 1419lm (@ 90CRI min / 3000K) Delivered			
	29L 32" diameter 29W LED / 1581lm (@ 90CRI min / 3000K) Delivered			
	44L 48" diameter 44W LED / 2337lm (@ 90CRI min / 3000K) Delivered			
	62L 60" diameter* 62W LED / 3567lm (@ 90CRI min / 3000K) Delivered		D2U 0-10V Dimming (@ 120-277V) 62L	
RINGER				

Ordering Example: **RINGER-25L-9030-DMU-SS**