



PROJECT	TYPE	CATALOG NUMBER
---------	------	----------------

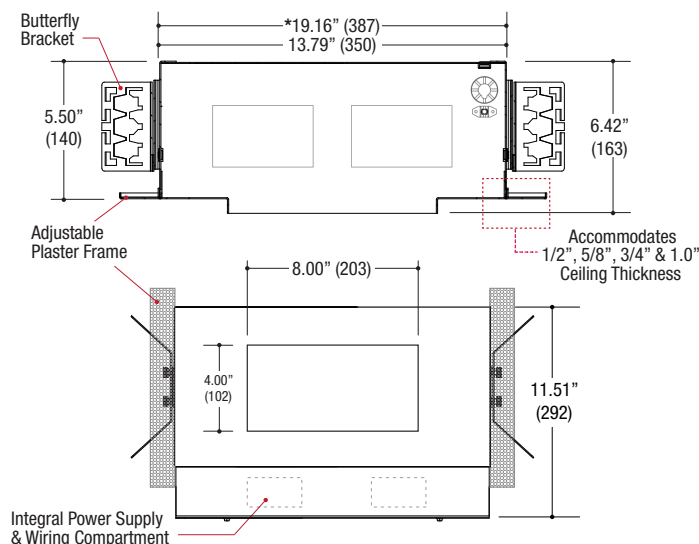

Trim Compatibility

- 8014
- 8024
- 8044
- 8414
- 8424
- 8444



Fixed / Fixed



Fixed / Adjustable



Adjustable / Adjustable



TRIMS ORDERED SEPARATELY

Specifications

RECTANGULAR TRIMMED HOUSING

- Housing and plaster frame of all steel construction
- Black powder coat finish
- Adjustable plaster frame
- Accommodates two 4" square trimless inserts
- **Ceiling Cut-out - 4.13" x 8.13"**

LED SOURCE

- Field-replaceable integral LED module
- Field replaceable optics
- CREE
- 08W / 883lm (@ 80CRI min / 3000K) Fixed
- 08W / 542lm (@ 80CRI min / 3000K) Adjustable
- 13W / 1189lm (@ 80CRI min / 3000K) Fixed
- 13W / 729lm (@ 80CRI min / 3000K) Adjustable
- ValuDIM™
- 15W / 772lm (3000-1800K) Warm Dimming - Fixed
- 15W / 473lm (3000-1800K) Warm Dimming - Adjustable

ELECTRICAL

- Field-replaceable integral LED driver
- Electrical wiring compartment integrated into housing construction
- Internal thermal protection
- Easy maintenance access through ceiling opening
- Rated for through-branch wiring
- Optional dimming

MOUNTING

- Butterfly brackets for commercial installation in drywall, wood, stone, acoustic tile, or other ceiling types
- Perforated plate adjusts for 1/2", 5/8", 3/4" & 1" ceiling thickness
- Includes Heavy-Duty L-Bars™ hanger bar system for residential installation



LABELS

- Suitable for damp location, except when ordered with shower trim - Suitable for wet location
- **Air-Tight / IC Optional**



ORDERING INFO

5 YEAR WARRANTY

SERIES	CREE	ValuDIM™	DRIVER / VOLTAGE	OPTIONS
VFS-2BA-T	08C 08W LED 13C 13W LED	15V 15W LED	DMU Dimming Multiple Forward/Reverse Phase (@ 120V only) 0-10V Wires Present (@ 120-277V) D31* Lutron LTEA Hi-lume™ Forward Phase 1% (@ 120V only) DEU* Lutron LDE1/PEQ1 Hi-lume™ EcoSystem™ 1% with Soft-On, Fade-to-Black™ DPU* Lutron PEQ0 Hi-lume™ Premier™ 19w max. 0.1% with Soft-On, Fade-to-Black™	IC* Insulated Ceiling * See drawing for extended length dimension
VF100 SERIES 2 Light Trimmed Housing Black finish standard				
		or		

Ordering Example: **VFS-2BA-T-13C-D1-1-IC**

©2022 LF ILLUMINATION LLC

We reserve the right to change or withdraw specifications without prior notice.

HEADQUARTERS
9200 Deering Avenue
Chatsworth CA 91311

Telephone: 818-885-1335
Toll Free: 855-885-1335
Fax: 818-576-1335

www.lfillumination.com
rev: 031422