

PROJECT

TYPE

CATALOG NUMBER

Measurements in () are metric equivalents.

Specifications

SPOTLIGHT

- 3.15" diameter cylinder
- 125° x 125° arm articulation - Friction lock
- 90° x 90° head rotation - Friction lock
- Die cast aluminum optical housing
- Articulating arm allows for greater aiming
- Powder coat finish

LED SOURCE

- Field-changeable optic
- CREE / **ValuDIM™**
- Accepts 1 or more optical accessories


ValuDIM™

ELECTRICAL

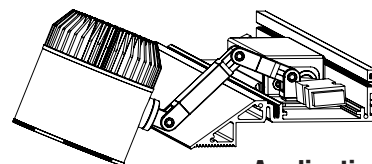
- Field-replaceable LED driver
- Dimmable

MOUNTING

- Fabricated aluminum extension arm
- Side channel magnetic mount
- Designed for EF400 - EF4BNS Channel

LABELS

- Suitable for damp location

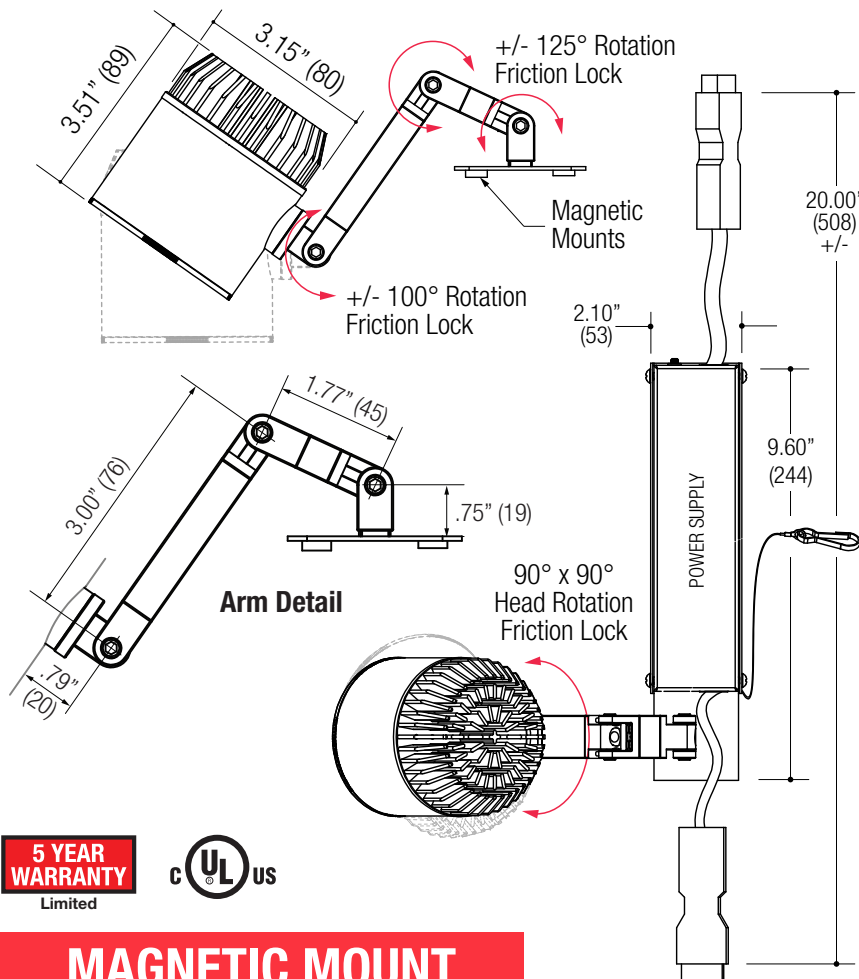

Application View

EF400 / EFBNS Channel Shown

PLEASE NOTE THAT STARTERS AND JUMPERS ARE REQUIRED FOR THE EF ACCENT HEADS TO MAKE A COMPLETE FUNCTIONING SYSTEM.

SEE LINK HERE FOR MORE INFO:

[EF-Accent-Starter_Jumper-111121.pdf](#)
([lfillumination.com](#))



5 YEAR WARRANTY
Limited



MAGNETIC MOUNT

ORDERING INFO

SERIES	WATTAGE	CRI / COLOR	BEAM	DRIVER	FINISH
EF408B EF400 Cylindrical Small Die Cast Aluminum Housing Variable Adjustment EF400 Channel Mount	08C 08W LED 982 lm del.	8027 80CRI / 2700K 8030 80CRI / 3000K 8035 80CRI / 3500K 8040 80CRI / 4000K 9227 92CRI / 2700K 9230 92CRI / 3000K 9235 92CRI / 3500K 9240 92CRI / 4000K	N Narrow 13° M Medium 22° W Wide 30° V Very Wide 50°	DMU Dimming Multiple Forward/Reverse Phase (@ 120V only) 0-10V Wires Present (@ 120-277V)	BB Black WW White Consult factory for custom colors. Minimum order required. Bezels only available in black or white.
	13C 13W LED 1322 lm del.				
	19C 19W LED 1900 lm del.				
	26C 26W LED 2555 lm del. Delivered @ 80CRI / 3000K Narrow Beam				
	ValuDIM™ 15V 15W LED / 874lm del. 3000-1800K Warm Dimming Delivered @ 92CRI / 3000K Narrow Beam	9220 92CRI / 3000-1800K Warm Dimming (ValuDIM Only)			

Ordering Example: **EF408B-13C-8027-W-DMU-BB**