
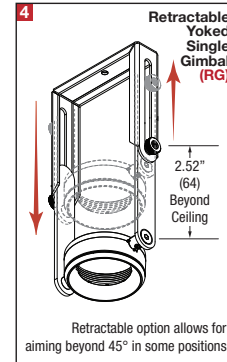
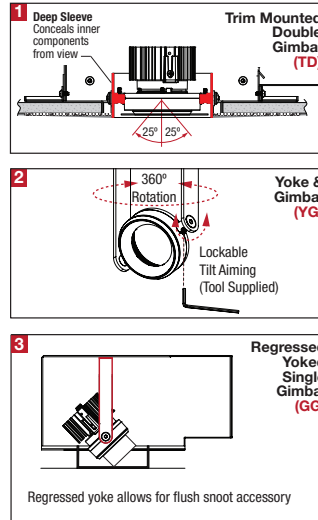


PROJECT

TYPE

CATALOG NUMBER

Measurements in () are metric equivalents.

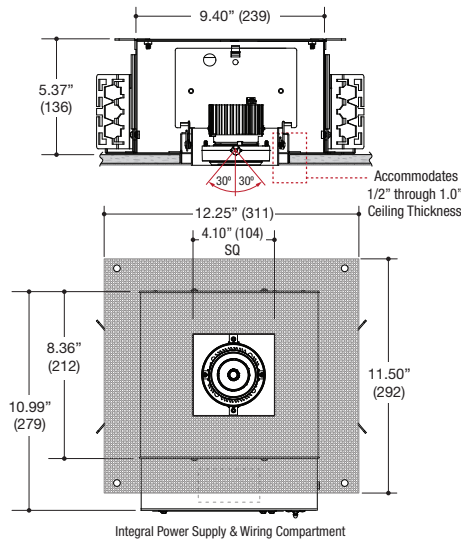

DESCRIPTION

- One light recessed accent / downlight - Small size
- All steel 18GA construction with powder coat finish
- Trimless insert with 4.10" x 4.10" open aperture
- Perforated metal mesh frame for mudding right to the aperture
- Vent holes for cooler operating temperature
- Trimless insert features deep sleeve to conceal inner components
- Insert sleeve removable for maintenance
- **Ceiling Cut-Out - 5.30" X 5.30"**

LED Source

- Field-replaceable integral LED module
- Field-changeable optic
- CREE / **ValuDIM™**
- Accepts up to 2 or more optical accessories
- Double gimbal lamp holder with lockable tilt aiming
- Trim mounted double gimbal standard with optional single gimbal flush yoke, regressed yoke or adjusting retractable yoke

ELECTRICAL

- Field-replaceable integral LED driver
- Electrical wiring compartment integrated into housing construction
- Thermal protection
- Easy maintenance access through ceiling opening
- Rated for through-branch wiring
- Dimmable

MOUNTING

- Butterfly brackets for commercial installation in drywall and other mud in ceiling types
- Heavy-Duty **L-Bars™** hanger bar system ordered separately **LF #LBARS4PK**
- Continuously variable plate adjusts for 1/2" through 1.0" ceilings

LABELS

- Suitable for damp location

ORDERING INFO

5 YEAR WARRANTY
Limited



SERIES	LED MODULE WATTAGE AND INFORMATION	CRI / COLOR	BEAM	HSG TYPE	DRIVER / VOLTAGE	FINISH	OPTIONS
MN31BN-S New Construction Housing	CREE 08C 08W LED / 1094lm 13C 13W LED / 1473lm 19C 19W LED / 2117lm	8027 80CRI / 2700K 8030 80CRI / 3000K 8035 80CRI / 3500K 8040 80CRI / 4000K	CREE N Narrow 16° M Medium 28° W Wide 42° V Very Wide 73°	TD Trim Mounted Double Gimbal YG Yoke Gimbal Flush to Ceiling Line GG Regressed Yoked Gimbal*	DMU Dimming Multiple Forward/Reverse Phase (@ 120V only) 0-10V Wires Present (@ 120-277V) D31 Lutron Hi-lume™ Forward Phase 1% (@ 120V only) DPU Lutron Hi-lume™ Premier™ 0.1% with Soft-On, Fade-to-Black™ (@ 120-277V only)	BB Black WW White	IC Insulated Ceiling (MN31BA-S Only)
MN31BA-S New Construction / Air-tight Housing	Delivered @ 80CRI / 3000K Narrow Beam	9227 92CRI / 2700K 9230 92CRI / 3000K 9235 92CRI / 3500K 9240 92CRI / 4000K					
MULTIFORMS MF350 Series Recessed 1-Light Straight Aperture Adjustable Accent Trimless Fixture	ValuDIM™ 15V 15W LED / 957lm Delivered 3000-1800K Warm Dimming Delivered @ 92CRI / 3000K Narrow Beam	9220 92CRI / 3000-1800K Warm Dimming ValuDIM Only	ValuDIM™ N Narrow 17° M Medium 25° W Wide 38°	RG Retractable Yoked Gimbal * Required to enable flush appearance with snoot accessory.			

Example: **MN31BN-S-13C-8027-N-TD-DMU-BB**