
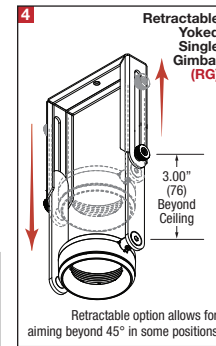
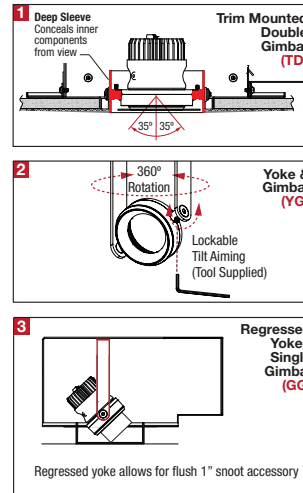


PROJECT

TYPE

CATALOG NUMBER

Measurements in () are metric equivalents.

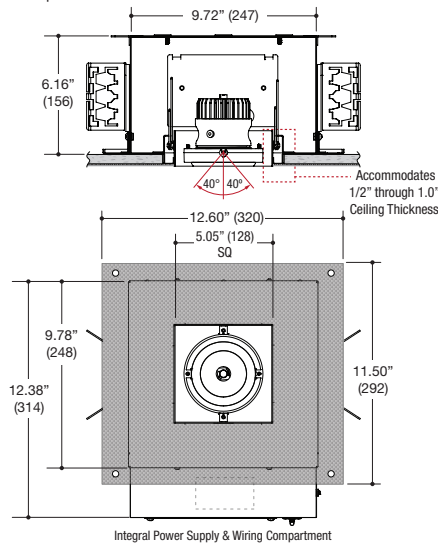

DESCRIPTION

- One light recessed accent / downlight - Medium size
- All steel 18GA construction with powder coat finish
- Trimless insert with 5.05\" x 5.05\" open aperture
- Perforated metal mesh frame for mudding right to the aperture
- Vent holes for cooler operating temperature
- Trimless insert features deep sleeve to conceal inner components
- Insert sleeve removable for maintenance
- **Ceiling Cut-Out - 6.25\" X 6.25\"**

LED Source

- Field-replaceable integral LED module
- Field-changeable optic
- CREE
- Accepts up to 2 or more optical accessories
- Double gimbal lamp holder with lockable tilt aiming
- Trim mounted double gimbal standard with optional single gimbal flush yoke, regressed yoke or adjusting retractable yoke



ELECTRICAL

- Field-replaceable integral LED driver
- Electrical wiring compartment integrated into housing construction
- Thermal protection
- Easy maintenance access through ceiling opening
- Rated for through-branch wiring
- Dimmable

MOUNTING

- Butterfly brackets for commercial installation in drywall and other mud in ceiling types
- Heavy-Duty **L-Bars™** hanger bar system ordered separately **LF #LBARS4PK**
- Continuously variable plate adjusts for 1/2\" through 1.0\" ceilings

LABELS

- Suitable for damp location

**5 YEAR
WARRANTY**
Limited



ORDERING INFO

SERIES	LED MODULE WATTAGE AND INFORMATION	CRI / COLOR	BEAM	HSG TYPE	DRIVER / VOLTAGE	FINISH	OPTIONS
MN31CN-S New Construction Housing	CREE 19C 19W LED / 2163lm 26C 26W LED / 2908lm	8027 80CRI / 2700K 8030 80CRI / 3000K 8035 80CRI / 3500K 8040 80CRI / 4000K 9227 92CRI / 2700K 9230 92CRI / 3000K 9235 92CRI / 3500K 9240 92CRI / 4000K	CREE N Narrow 14° M Medium 30° W Wide 40° V Very Wide 70°	TD Trim Mounted Double Gimbal YG Yoke Gimbal Flush to Ceiling Line GG Regressed Yoked Gimbal* RG Retractable Yoked Gimbal * Required to enable flush appearance with snoot accessory.	DMU Dimming Multiple Forward/Reverse Phase (@ 120V only) 0-10V Wires Present (@ 120-277V) D31 Lutron LTEA Hi-lume™ Forward Phase 1% (@ 120V only) DEU Lutron LDE1/PEQ1 Hi-lume™ EcoSystem™ 1% with Soft-On, Fade-to-Black™ 26W only DPU Lutron PEQ0 Hi-lume™ Premier™ 19W max. 0.1% with Soft-On, Fade-to-Black™ (@ 120-277V only)	BB Black WW White	IC Insulated Ceiling (MN31CA-S Only)
MN31CA-S New Construction / Air-tight Housing	Delivered @ 80CRI / 3000K Narrow Beam						
MULTIFORMS MF350 Series Recessed 1-Light Straight Aperture Adjustable Accent Trimless Fixture							

Example: **MN31CN-S-26C-8027-N-TD-DMU-BB**

©2021 LF ILLUMINATION LLC

We reserve the right to change or withdraw specifications without prior notice.

HEADQUARTERS
9200 Deering Avenue
Chatsworth CA 91311

Telephone: 818-885-1335
Toll Free: 855-885-1335
Fax: 818-576-1335

www.lfillumination.com
rev: 120921