
## **EXTERMINATOR II**

# Monopoint Luminaire - 1052



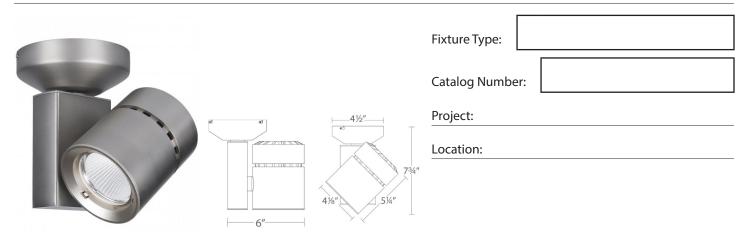

#### **PRODUCT DESCRIPTION**

Exterminator II offers superior light output in a small, unobtrusive design. Developed for upscale residential and commercial environments.

#### **FEATURES**

- · Accommodates one lens accessory and one glare control accessory
- 365° horizontal rotation and 180° vertical aiming
- Ceiling and wall mountable
- 50,000 hour rated life
- 5 year WAC Lighting product warranty

#### **SPECIFICATIONS**

Finish:

**Construction:** Die-cast aluminum with removable front cap for easy change

of lenses or accessories

**Power Consumption:** 1052S: 36W; 1052N/F: 46W **Input:** 120V-277V AC 50/60HZ

**Dimming:** 100%-1% Electronic Low Voltage (ELV, 120V only),

TRIAC (120V only) and 0-10V Powder coated Black and White, Electroplated Brushed Nickel

Standards: UL & cUL Damp Location listed, Energy Star® 2.0 rated,

Title 24 JA8 Compliant

System	Beam	Color Temp	CRI	Lumens	CBCP	Finish
MO-1052	<b>S</b> 13°	827 2700K 927 2700K 830 3000K 930 3000K 835 3500K 840 4000K	90 85 90 85	3070 2535 3260 2650 3340 3355	25160 20775 26740 21715 27380 27515	
	N 28°	827 2700k 927 2700k 830 3000k 930 3000k 835 3500k 840 4000k	90 85 90 85	5025 4150 5340 4335 5470 5495	13655 11275 14510 11780 14860 14930	BK Black BN Brushed Nickel WT White
	<b>F</b> 56°	827 2700K 927 2700K 830 3000K 930 3000K 835 3500K 840 4000K	90 85 90 85	4850 4005 5155 4185 5280 5305	5790 4780 6150 4995 6300 6330	

#### **LENS ACCESSORIES**

LENS-25-AMB	Amber
LENS-25-BLU	Blue
LENS-25-GRN	Green
LENS-25-RED	Red
LENS-25-UVF	UV Filter
LENS-25-FR	Frosted
LENS-25-SPR	Spread
LENS-25-BEL	Beam Elongating

#### **GLARE CONTROL - CROSS LOUVER**

LENS-25P-CRL-BK	Black
LENS-25P-CRL-BN	Brushed Nickel
LENS-25P-CRL-WT	White

### **GLARE CONTROL** - SNOOT

LENS-25-SNOOT-BK	Black
LENS-25-SNOOT-BN	Brushed Nickel
LENS-25-SNOOT-WT	White

Example: MO-1052F-830-BN

1