AETHER 3.5" - Adjustable Trimless

R3ARAL, R3ASAL







Fixture Type:	
Catalog Number:	
Project:	
Location:	

PRODUCT DESCRIPTION

Aether features all of the benefits of a high performance LED recessed downlight including Energy Star® Rating, Wet Location listing, and high output with efficiency. Available in a sleek trimless option which can be spackled directly up to the aperture. At 3.5" in height, the Aether is designed with the difficult to fit jobs in mind.

FEATURES

- · Designed to fit in tight plenum
- · Damp location listed for trims
- 0° 30° vertical adjustable range
- 3.5" trim aperture, 3.5" housing height
- 5 year WAC Lighting product warranty

SPECIFICATIONS

Construction: Die-cast aluminum trim with extruded aluminum heat sink

Input: Universal 120 - 277VAC, 50/60 Hz

Power: 15.5W, power factor 0.98

Dimming: 100% - 0% with 0-10V dimmer (120V - 277V)

100% - 5% with Electronic Low Voltage (ELV) dimmer (120V only)

Mounting: Retention clips firmly hold trim to housing

Ceiling thickness: 1/2" - 11/2"

Finish: Electrostatically Powder Coated White, Black,

Enamel Coated Haze

Standards: ETL & cETL Damp Location Listed, Title 24 JA8

Compliant. Energy Star 2.0

Trim (See next page for housing)	Model	Beam	Color Temp	CRI	Lumens	CBCP	Finishes
33/8" - 31/2" - 57/8"		S 15°	827 2700K 830 3000K 835 3500K 840 4000K	85 85 85 85	1060 1105 1135 1150	5295 5515 5675 5740	BK Black HZ Haze WT White
			927 2700K 930 3000K	90 90	880 920	4415 4590	W I Willie
	R3ARAL Round, Adjustable	N 25°	827 2700K 830 3000K 835 3500K 840 4000K	85 85 85 85	1110 1160 1190 1205	4020 4190 4310 4360	BK Black HZ Haze
	Damp Location		927 2700K 930 3000K	90 90	925 965	3350 3485	WT White
		F 50°	827 2700K 830 3000K 835 3500K 840 4000K	85 85 85 85	1050 1095 1125 1140	1760 1835 1885 1906	BK Black HZ Haze
			927 2700K 930 3000K	90 90	875 910	1465 1525	WT White
→ 3 ³ / ₈ "		S 15°	827 2700K 830 3000K 835 3500K 840 4000K	85 85 85 85	990 1040 1070 1080	5610 5845 6010 6075	BK Black HZ Haze
			927 2700K 930 3000K	90 90	830 865	4675 4860	WT White
	R3ASAL Square, Adjustable	N 25°	827 2700K 830 3000K 835 3500K 840 4000K	85 85 85 85	1045 1090 1120 1135	4000 4170 4290 4335	BK Black HZ Haze
	Damp Location		927 2700K 930 3000K	90 90	870 905	3335 3470	WT White
		F 50°	827 2700K 830 3000K 835 3500K 840 4000K	85 85 85 85	990 1030 1055 1070	1775 1850 1900 1923	BK Black HZ Haze
			927 2700K 930 3000K	90 90	820 830	1480 1540	WT White

R3ARAL-

Example: R3ARAL-N930-HZ


waclighting.com Phone (800) 526.2588 Fax (800) 526.2585 **Headquarters, East Manufacturing Facility** 44 Harbor Park Drive Port Washington, NY 11050

South East Manufacturing Facility 1600 Distribution Ct Lithia Springs, GA 30122 Central Manufacturing Facility 1700 South J Elmer Freeway, Ste 100 Cedar Hill, TX 75104 West Manufacturing Facility 1750 S Archibald Ave Ontario, CA 91761

AETHER 3.5" - Adjustable Trimless

Housing



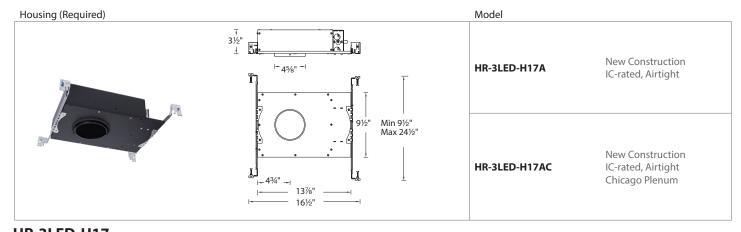

HR-3LED-H17 Example: HR-3LED-H17A