
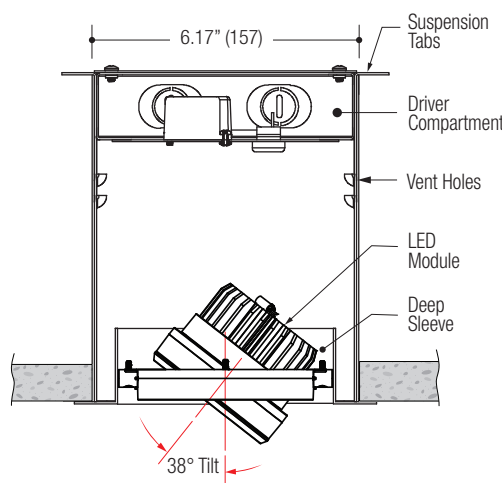



PROJECT

TYPE

CATALOG NUMBER

Measurements in ( ) are metric equivalents.

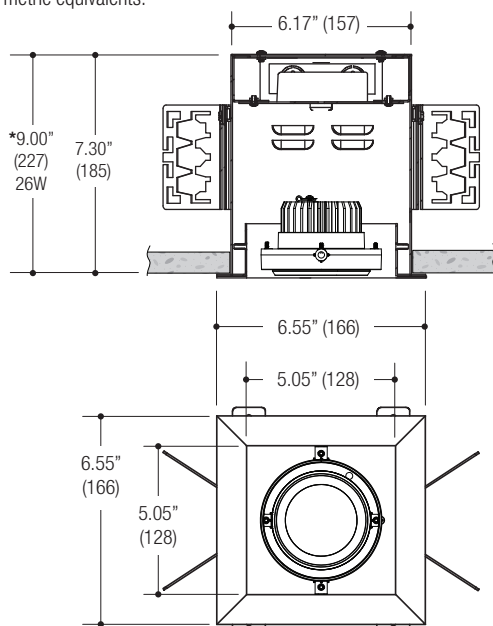

### DESCRIPTION

- One light recessed accent / downlight - medium
- All steel 18GA construction housing - powder coat finish
- .75" Trim flange with 5.05" X 5.05" open aperture
- Vent holes for cooler operating temperature
- Trim features deep sleeve to conceal inner components
- Trim flange removable for maintenance

### LED SOURCE

- Field-replaceable integral LED module
- Field-changeable optic

### CREE

- Accepts up to 2 or more optical accessories
- Trim mounted double gimbal LED holder

### ELECTRICAL

- Fully integral LED driver
- Electrical wiring compartment integrated into housing construction
- Thermal protection
- Easy maintenance access through ceiling opening
- Rated for through-branch wiring
- Optional dimming

### MOUNTING

- Butterfly brackets for commercial installation in drywall, wood, stone, acoustic tile, or other ceiling types


### LABELS

- Suitable for damp location

**5 YEAR  
WARRANTY**  
Limited



### ORDERING INFO

SERIES	LED MODULE WATTAGE AND INFORMATION	CRI / COLOR	BEAM	HSG TYPE	DRIVER	FINISH
<b>MN41CN-T</b> New Construction Housing	<b>CREE</b> <b>13C</b> 13W LED / 1353lm <b>19C</b> 19W LED / 1948lm <b>*26C</b> 26W LED / 2611lm  Delivered @ 80CRI / 3000K Wide Beam  *Reference taller housing dimension requirement  	<b>8027</b> 80CRI / 2700K <b>8030</b> 80CRI / 3000K <b>8035</b> 80CRI / 3500K <b>8040</b> 80CRI / 4000K <b>9227</b> 92CRI / 2700K <b>9230</b> 92CRI / 3000K <b>9227</b> 92CRI / 2700K <b>9230</b> 92CRI / 3000K <b>9240</b> 92CRI / 4000K <b>9827</b> 98CRI / 2700K <b>9830</b> 98CRI / 3000K <b>9835</b> 98CRI / 3500K <b>9840</b> 98CRI / 4000K	<b>CREE</b> <b>S</b> Spot 12° <b>N</b> Narrow 24° <b>M</b> Medium 38° <b>W</b> Wide 45° <b>V</b> Very Wide 60°	<b>TD</b> Trim Mounted Double Gimbal	<b>DMU</b> Dimming Multiple Forward/Reverse Phase (@ 120V only) 0-10V Wires Present (@ 120-277V) <b>D31</b> Lutron Hi-lume™ Forward Phase 1% (@ 120V only) <b>DEU</b> Lutron Hi-lume™ EcoSystem™ 1% with Soft-On, Fade-to-Black™ 1% (@ 120-277V only) <b>DPU</b> Lutron Hi-lume™ Premier™ 20w max. 0.1% with Soft-On, Fade-to-Black™ (@ 120-277V only)	<b>BB</b> Black <b>WW</b> White <b>WB</b> White Trim / Black Interior

Example: **MN41CN-T-19C-8027-N-TD-DMU-BB**

©2021 LF ILLUMINATION LLC

We reserve the right to change or withdraw specifications without prior notice.

HEADQUARTERS  
9200 Deering Avenue  
Chatsworth CA 91311

Telephone: 818-885-1335  
Toll Free: 855-885-1335  
Fax: 818-576-1335

**www.lfillumination.com**  
rev: 070821