

PROJECT

TYPE




CATALOG NUMBER

Measurements in () are metric equivalents.

1/2" NPT Adapter w/ Gasket to accept
Conduit Connector
(By installing contractor)
Ensure to leave room for
connector supply

Integral Driver
Compartment

Adjustable
.38" - 1.80"
Pressure Fit

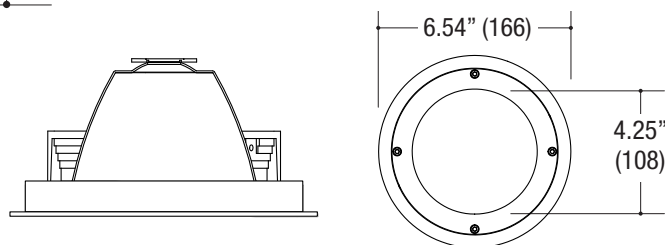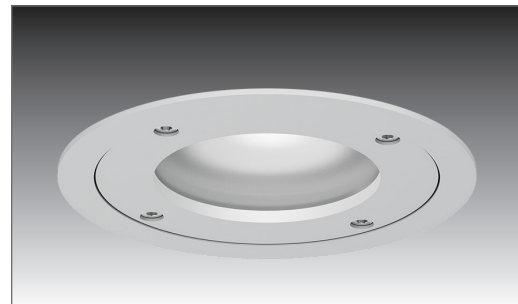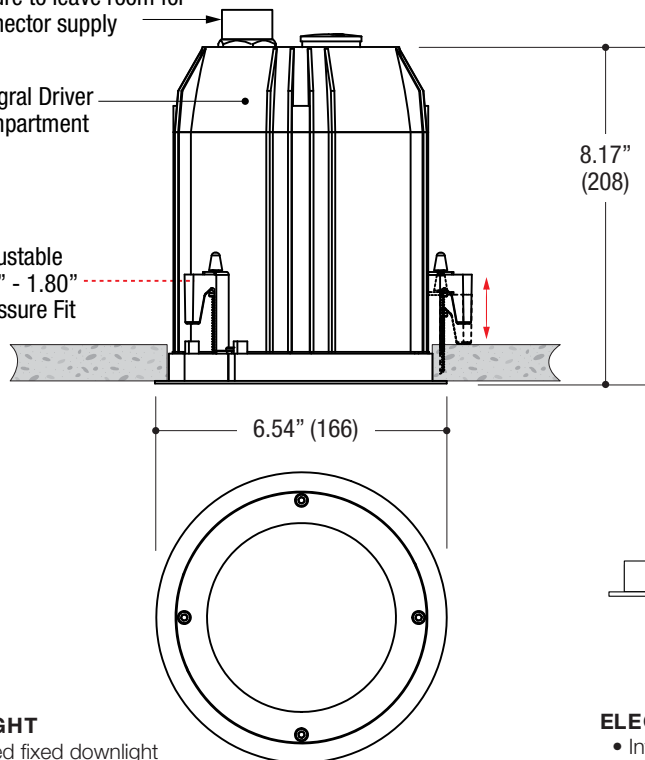

DOWNLIGHT

- Recessed fixed downlight
- Die-cast aluminum trim
- Powder coat finish

HOUSING

- Extruded aluminum central housing
- Powder coat finish
- Dust and water jet tight sealed
- **Ceiling Cut-Out - Ø6.20"**

LED SOURCE

- Field-changeable optic
- **CREE**

ELECTRICAL

- Integral LED driver included
- Primary wiring compartment with power supply
- Superpure aluminum reflector
- Dimmable

MOUNTING

- Swing out pressure fit mounting clips
- Adjustable up to 1.80" max. ceiling thickness

LABELS

- Suitable for wet location
- IP66 rated



ORDERING INFO

| SERIES | WATTAGE | CRI / COLOR | BEAM | DRIVER / VOLTAGE | FINISH | OPTIONS |
|---|---|---|--|--|------------------|---|
| 5911-1DA-T | 19C 19W LED 1560 lm | 8027 80CRI / 2700K | N Narrow 15° | DMU Dimming Multiple Forward/Reverse Phase (@ 120V only) 0-10V Wires Present (@ 120-277V) | SS Silver | EM |
| BULLET LARGE Die-Cast Aluminum Trim Fixed Downlight Trimmed Fixture | 26C 26W LED 2090 lm Delivered lumens @ 80CRI / 3000K Narrow Beam | 8030 80CRI / 3000K 8035 80CRI / 3500K 8040 80CRI / 4000K 9227 92CRI / 2700K 9230 92CRI / 3000K 9235 92CRI / 3500K 9240 92CRI / 4000K | M Medium 24° W Wide 36° | | | Remotely Mounted Emergency LED Inverter (Field wiring required) |

Ordering Example: **5911-1DA-T-19C-8030-N-DMU-SS-EM**

©2023 LF ILLUMINATION LLC

We reserve the right to change or
withdraw specifications without prior notice.

HEADQUARTERS
9200 Deering Avenue
Chatsworth CA 91311

Telephone: 818-885-1335
Toll Free: 855-885-1335
Fax: 818-576-1335

www.lfillumination.com
rev: 051123