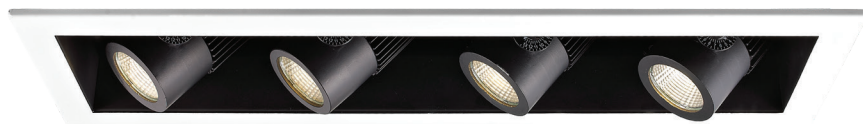


# MT-4LD4 - 4 Light

## 4" LED Precision Multiples

WAC



Fixture Type:

Catalog Number:

Project:

Location:

### PRODUCT DESCRIPTION

Retractable, adjustable spot lights

### FEATURES

- ELV and 0-10V dimming options
- Invisible Trim™ is designed to sit flush with the ceiling for a clean, architectural look
- Fully retractable from housing
- 365° horizontal rotation and 180° vertical aiming
- Accepts 1 replacement lens
- 50,000 hour rated life
- 5 year WAC Lighting product warranty

### SPECIFICATIONS

**Construction:** Die-cast aluminum heat sink painted black. Trim, housing and junction box are 20 gauge steel. Frame and hanger bars are heavy gauge galvanized steel.

**J-Box:** Seven knockouts and four Romex® style wiring connectors provided for ease of installation. Rated for branch wiring.

**Driver:** Universal (120V - 277V) or 120V input only

**Light Source:** High output LED (included with housing)





**Dimming:** 0-10V or ELV (see list of housings below)

**Mounting:** Supplied with hanger bars, adjustable from 9¼"-24½" to accommodate various joist construction and grid sizes. Hanger bars include a captive mounting "screw-nail" for ease of installation. Accommodates surface up to 1" thick. 19⅞" x 5⅞" cutout with trim, 19⅞" x 5⅞" cutout for Invisible Trim™. See instruction sheet for details on installation using spackle ring.

**Finish:** Abrasion resistant powder coat paint in Black (BK).

**Standards:** ETL & cETL Damp Location listed. Airtight.


### TRIMS

		<b>MT-4LD416T</b> Trim	<b>WT</b> White <b>BK</b> Black
		<b>MT-4LD416TL</b> Invisible Trim™	<b>WT</b> White

 - 

Example: **MT-4LD416T-BK**

### HOUSINGS

HOUSINGS	Power	Beam	Color Temp	CRI	Interior
	<b>MT-4LD416N</b> <i>0-10V dimming</i> <i>Non-IC, 120V-277V input</i>	15W x 4	<b>S</b> 20° <b>F</b> 40°	<b>27</b> 2700K 85 <b>927</b> 2700K 90 <b>30</b> 3000K 85 <b>930</b> 3000K 90 <b>35</b> 3500K 85 <b>40</b> 4000K 85	<b>BK</b> Black
	<b>MT4LD416NE</b> <i>ELV dimming</i> <i>Non-IC, 120V input</i>	15W x 4			
	<b>MT4LD411NE</b> <i>ELV dimming</i> <i>IC-Rated, 120V input</i>	11W x 4			

 -  - **BK**

Example: **MT-4LD416NE-S927-BK**

### REPLACEMENT LENS

Amber	<b>LENS-16-AMB</b>	UV Filter	<b>LENS-16-UVF</b>
Blue	<b>LENS-16-BLU</b>	Frosted	<b>LENS-16-FR</b>
Green	<b>LENS-16-GRN</b>	Spread	<b>LENS-16-SPR</b>
Red	<b>LENS-16-RED</b>	Beam Elongator	<b>LENS-16-BEL</b>

wacighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters, East Manufacturing Facility

44 Harbor Park Drive

Port Washington, NY 11050

South East Manufacturing Facility

1600 Distribution Ct

Lithia Springs, GA 30122

Central Manufacturing Facility

1700 South J Elmer Freeway, Ste 100

Cedar Hill, TX 75104

West Manufacturing Facility







1750 S Archibald Ave

Ontario, CA 91761

# MT-4LD4 - 4 Light

## 4" LED Precision Multiples

WAC

LUMINAIRE PERFORMANCE	Power Per Light	Beam	Photometry	Color Temp	CRI	Lumen	CBCP
<b>MT-4LD416N</b> 0-10V dimming Non-IC, 120V-277V input	15W	S 20°		<b>27</b> 2700K 85 5200 6990 x 4 <b>927</b> 2700K 90 4320 5800 x 4 <b>30</b> 3000K 85 5400 7270 x 4 <b>930</b> 3000K 90 4480 6010 x 4 <b>35</b> 3500K 85 5560 7480 x 4 <b>40</b> 4000K 85 5620 7550 x 4			
		F 40°		<b>27</b> 2700K 85 5060 3060 x 4 <b>927</b> 2700K 90 4200 2540 x 4 <b>30</b> 3000K 85 5260 3185 x 4 <b>930</b> 3000K 90 4360 2635 x 4 <b>35</b> 3500K 85 5420 3275 x 4 <b>40</b> 4000K 85 5460 3310 x 4			
<b>MT4LD416NE</b> ELV dimming Non-IC, 120V input	15W	S 20°		<b>27</b> 2700K 85 5200 6990 x 4 <b>927</b> 2700K 90 4320 5800 x 4 <b>30</b> 3000K 85 5400 7270 x 4 <b>930</b> 3000K 90 4480 6010 x 4 <b>35</b> 3500K 85 5560 7480 x 4 <b>40</b> 4000K 85 5620 7550 x 4			
		F 40°		<b>27</b> 2700K 85 5060 3060 x 4 <b>927</b> 2700K 90 4200 2540 x 4 <b>30</b> 3000K 85 5260 3185 x 4 <b>930</b> 3000K 90 4360 2635 x 4 <b>35</b> 3500K 85 5420 3275 x 4 <b>40</b> 4000K 85 5460 3310 x 4			
<b>MT4LD411NE</b> ELV dimming IC-Rated, 120V input	11W	S 20°		<b>27</b> 2700K 85 4120 5570 x 4 <b>927</b> 2700K 90 3420 4620 x 4 <b>30</b> 3000K 85 4280 5790 x 4 <b>930</b> 3000K 90 3540 4790 x 4 <b>35</b> 3500K 85 4400 5960 x 4 <b>40</b> 4000K 85 4440 6015 x 4			
		F 40°		<b>27</b> 2700K 85 4000 2395 x 4 <b>927</b> 2700K 90 3300 1980 x 4 <b>30</b> 3000K 85 4160 2490 x 4 <b>930</b> 3000K 90 3440 2065 x 4 <b>35</b> 3500K 85 4280 2560 x 4 <b>40</b> 4000K 85 4320 2585 x 4			

**REPLACEMENT HEADS**  
(INCLUDES: ONE HEAD, LED, AND DRIVER)

Housing Model	Module
<b>MT-4LD416N</b>	4MT4LD16N-S27-BK
	4MT4LD16N-S30-BK
	4MT4LD16N-S35-BK
	4MT4LD16N-S40-BK
	4MT4LD16N-S927-BK
	4MT4LD16N-S930-BK
	4MT4LD16N-F27-BK
	4MT4LD16N-F30-BK
	4MT4LD16N-F35-BK
	4MT4LD16N-F40-BK
	4MT4LD16N-F927-BK
	4MT4LD16N-F930-BK
<b>MT4LD416NE</b>	4MT4LD16NE-S27-BK
	4MT4LD16NE-S30-BK
	4MT4LD16NE-S35-BK
	4MT4LD16NE-S40-BK
	4MT4LD16NE-S927-BK
	4MT4LD16NE-S930-BK
	4MT4LD16NE-F27-BK
	4MT4LD16NE-F30-BK
	4MT4LD16NE-F35-BK
	4MT4LD16NE-F40-BK
	4MT4LD16NE-F927-BK
	4MT4LD16NE-F930-BK
<b>MT4LD411NE</b>	4MT4LD11NE-S27-BK
	4MT4LD11NE-S30-BK
	4MT4LD11NE-S35-BK
	4MT4LD11NE-S40-BK
	4MT4LD11NE-S927-BK
	4MT4LD11NE-S930-BK
	4MT4LD11NE-F27-BK
	4MT4LD11NE-F30-BK
	4MT4LD11NE-F35-BK
	4MT4LD11NE-F40-BK
	4MT4LD11NE-F927-BK
	4MT4LD11NE-F930-BK

wacighting.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters, East Manufacturing Facility  
44 Harbor Park Drive  
Port Washington, NY 11050

South East Manufacturing Facility  
1600 Distribution Ct  
Lithia Springs, GA 30122

Central Manufacturing Facility  
1700 South J Elmer Freeway, Ste 100  
Cedar Hill, TX 75104

West Manufacturing Facility  
1750 S Archibald Ave  
Ontario, CA 91761