RISC-V Instruction Set Summary

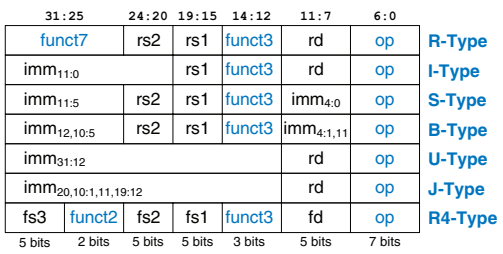

Figure B.1 RISC-V 32-bit instruction formats

- `imm`: signed immediate in $\mathbf{imm}_{11:0}$
- `uimm`: 5-bit unsigned immediate in $\mathbf{imm}_{4:0}$
- `upimm`: 20 upper bits of a 32-bit immediate, in $\mathbf{imm}_{31:12}$
- `Address`: memory address: **rs1** + SignExt($\mathbf{imm}_{11:0}$)
- `[Address]`: data at memory location Address
- `BTA`: branch target address: PC + SignExt({$\mathbf{imm}_{12:1}$, 1'b0})
- `JTA`: jump target address: PC + SignExt({$\mathbf{imm}_{20:1}$, 1'b0})
- `label`: text indicating instruction address
- `SignExt`: value sign-extended to 32 bits
- `ZeroExt`: value zero-extended to 32 bits
- `csr`: control and status register

Table B.1 RV32I: RISC-V integer instructions

op	funct3	funct7	Type	Instruction	Description	Operation
0000011 (3)	000	–	I	`lb rd, imm(rs1)`	load byte	`rd = SignExt([Address]7:0)`
0000011 (3)	001	–	I	`lh rd, imm(rs1)`	load half	`rd = SignExt([Address]15:0)`
0000011 (3)	010	–	I	`lw rd, imm(rs1)`	load word	`rd = [Address]31:0`
0000011 (3)	100	–	I	`lbu rd, imm(rs1)`	load byte unsigned	`rd = ZeroExt([Address]7:0)`
0000011 (3)	101	–	I	`lhu rd, imm(rs1)`	load half unsigned	`rd = ZeroExt([Address]15:0)`
0010011 (19)	000	–	I	`addi rd, rs1, imm`	add immediate	`rd = rs1 + SignExt(imm)`
0010011 (19)	001	0000000*	I	`slli rd, rs1, uimm`	shift left logical immediate	`rd = rs1 << uimm`
0010011 (19)	010	–	I	`slti rd, rs1, imm`	set less than immediate	`rd = (rs1 < SignExt(imm))`
0010011 (19)	011	–	I	`sltiu rd, rs1, imm`	set less than imm. unsigned	`rd = (rs1 < SignExt(imm))`
0010011 (19)	100	–	I	`xori rd, rs1, imm`	xor immediate	`rd = rs1 ^ SignExt(imm)`
0010011 (19)	101	0000000*	I	`srli rd, rs1, uimm`	shift right logical immediate	`rd = rs1 >> uimm`
0010011 (19)	101	0100000*	I	`srai rd, rs1, uimm`	shift right arithmetic imm.	`rd = rs1 >>> uimm`
0010011 (19)	110	–	I	`ori rd, rs1, imm`	or immediate	`rd = rs1 | SignExt(imm)`
0010011 (19)	111	–	I	`andi rd, rs1, imm`	and immediate	`rd = rs1 & SignExt(imm)`
0010111 (23)	–	–	U	`auipc rd, upimm`	add upper immediate to PC	`rd = {upimm, 12'b0} + PC`
0100011 (35)	000	–	S	`sb rs2, imm(rs1)`	store byte	`[Address]7:0 = rs27:0`
0100011 (35)	001	–	S	`sh rs2, imm(rs1)`	store half	`[Address]15:0 = rs215:0`
0100011 (35)	010	–	S	`sw rs2, imm(rs1)`	store word	`[Address]31:0 = rs2`
0110011 (51)	000	0000000	R	`add rd, rs1, rs2`	add	`rd = rs1 + rs2`
0110011 (51)	000	0100000	R	`sub rd, rs1, rs2`	sub	`rd = rs1 – rs2`
0110011 (51)	001	0000000	R	`sll rd, rs1, rs2`	shift left logical	`rd = rs1 << rs24:0`
0110011 (51)	010	0000000	R	`slt rd, rs1, rs2`	set less than	`rd = (rs1 < rs2)`
0110011 (51)	011	0000000	R	`sltu rd, rs1, rs2`	set less than unsigned	`rd = (rs1 < rs2)`
0110011 (51)	100	0000000	R	`xor rd, rs1, rs2`	xor	`rd = rs1 ^ rs2`
0110011 (51)	101	0000000	R	`srl rd, rs1, rs2`	shift right logical	`rd = rs1 >> rs24:0`
0110011 (51)	101	0100000	R	`sra rd, rs1, rs2`	shift right arithmetic	`rd = rs1 >>> rs24:0`
0110011 (51)	110	0000000	R	`or rd, rs1, rs2`	or	`rd = rs1 | rs2`
0110011 (51)	111	0000000	R	`and rd, rs1, rs2`	and	`rd = rs1 & rs2`
0110111 (55)	–	–	U	`lui rd, upimm`	load upper immediate	`rd = {upimm, 12'b0}`
1100011 (99)	000	–	B	`beq rs1, rs2, label`	branch if =	`if (rs1 == rs2) PC = BTA`
1100011 (99)	001	–	B	`bne rs1, rs2, label`	branch if ≠	`if (rs1 ≠ rs2) PC = BTA`
1100011 (99)	100	–	B	`blt rs1, rs2, label`	branch if <	`if (rs1 < rs2) PC = BTA`
1100011 (99)	101	–	B	`bge rs1, rs2, label`	branch if ≥	`if (rs1 ≥ rs2) PC = BTA`
1100011 (99)	110	–	B	`bltu rs1, rs2, label`	branch if < unsigned	`if (rs1 < rs2) PC = BTA`
1100011 (99)	111	–	B	`bgeu rs1, rs2, label`	branch if ≥ unsigned	`if (rs1 ≥ rs2) PC = BTA`
1100111 (103)	000	–	I	`jalr rd, rs1, imm`	jump and link register	`PC = rs1 + SignExt(imm), rd = PC + 4`
1101111 (111)	–	–	J	`jal rd, label`	jump and link	`PC = JTA, rd = PC + 4`

*Encoded in $\text{instr}_{31:25}$, the upper seven bits of the immediate field

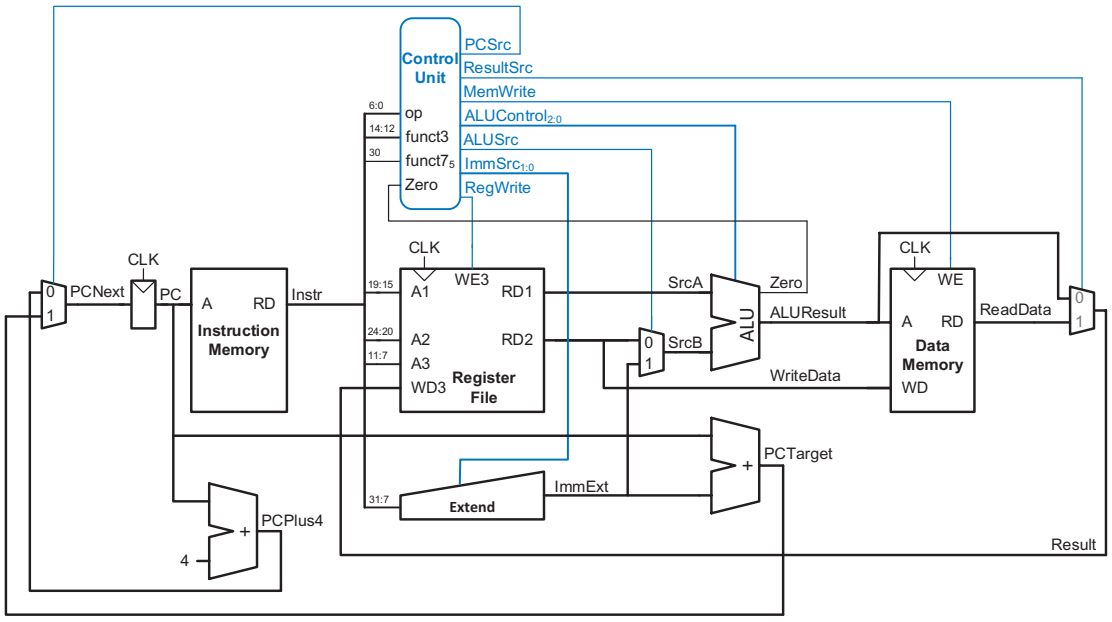

Figure 7.12 Complete single-cycle processor

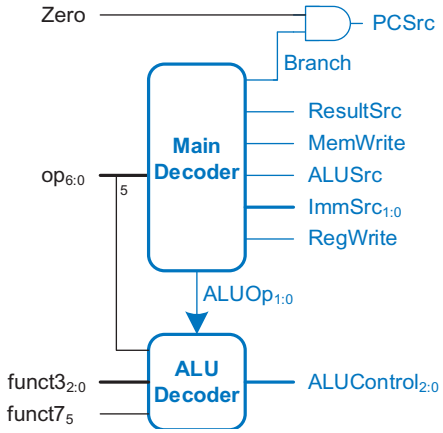

ALUOp	funct3	{op5, funct75}	ALUControl	Instruction
00	x	x	000 (add)	`lw, sw`
01	x	x	001 (subtract)	`beq`
10	000	00, 01, 10	000 (add)	`add`
	000	11	001 (subtract)	`sub`
	010	x	101 (set less than)	`slt`
	110	x	011 (or)	`or`
	111	x	010 (and)	`and`

Main Decoder

Instruction	Opcode	RegWrite	ImmSrc	ALUSrc	MemWrite	ResultSrc	Branch	ALUOp
`lw`	0000011	1	00	1	0	1	0	00
`sw`	0100011	0	01	1	1	x	0	00
R-type	0110011	1	xx	0	0	0	0	10
`beq`	1100011	0	10	0	0	x	1	01
`addi`	**0010011**	**1**	**00**	**1**	**0**	**0**	**0**	**10**

Table 7.1 ***ImmSrc*** **encoding**

ImmSrc	ImmExt	Type	Description
00	{{20{*Instr*[31]}}, *Instr*[31:20]}	I	12-bit signed immediate
01	{{20{*Instr*[31]}}, *Instr*[31:25], *Instr*[11:7]}	S	12-bit signed immediate
10	{{20{*Instr*[31]}}, *Instr*[7], *Instr*[30:25], *Instr*[11:8], 1'b0}	B	13-bit signed immediate

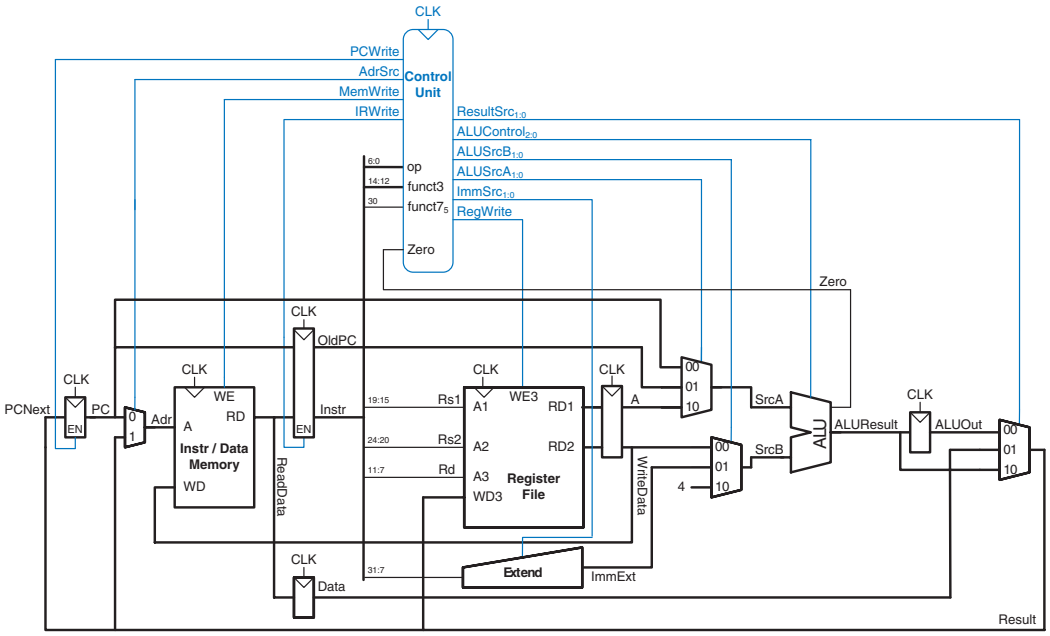

Figure 7.27 Complete multicycle processor

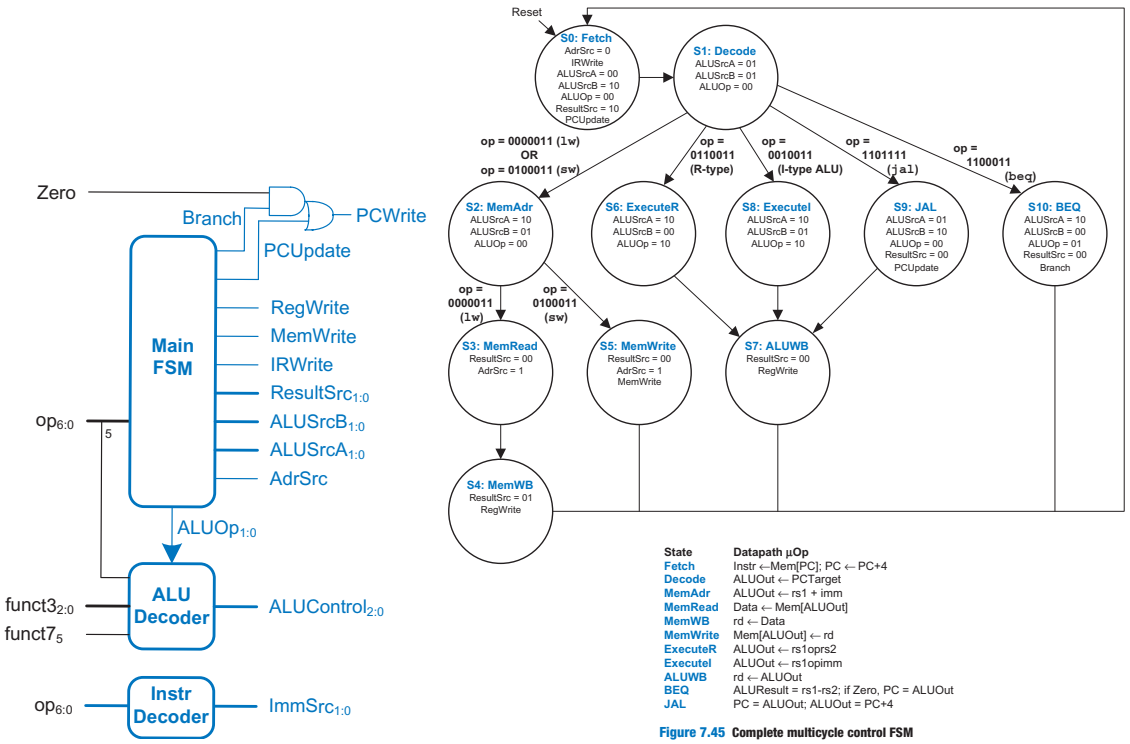

State	Datapath µOp
Fetch	Instr ← Mem[PC]; PC ← PC+4
Decode	ALUOut ← PCTarget
MemAdr	ALUOut ← rs1 + imm
MemRead	Data ← Mem[ALUOut]
MemWB	rd ← Data
MemWrite	Mem[ALUOut] ← rd
ExecuteR	ALUOut ← rs1oprs2
ExecuteI	ALUOut ← rs1opimm
ALUWB	rd ← ALUOut
BEQ	ALUResult = rs1-rs2; if Zero, PC = ALUOut
JAL	PC = ALUOut; ALUOut = PC+4

Figure 7.45 Complete multicycle control FSM

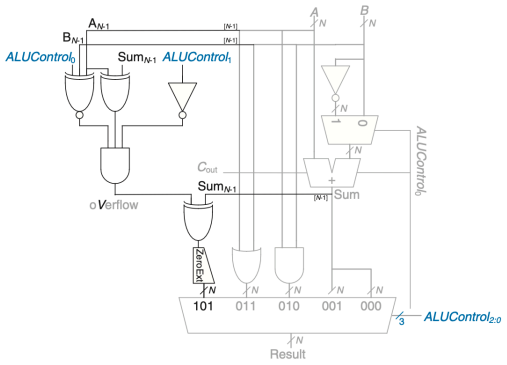

ALU

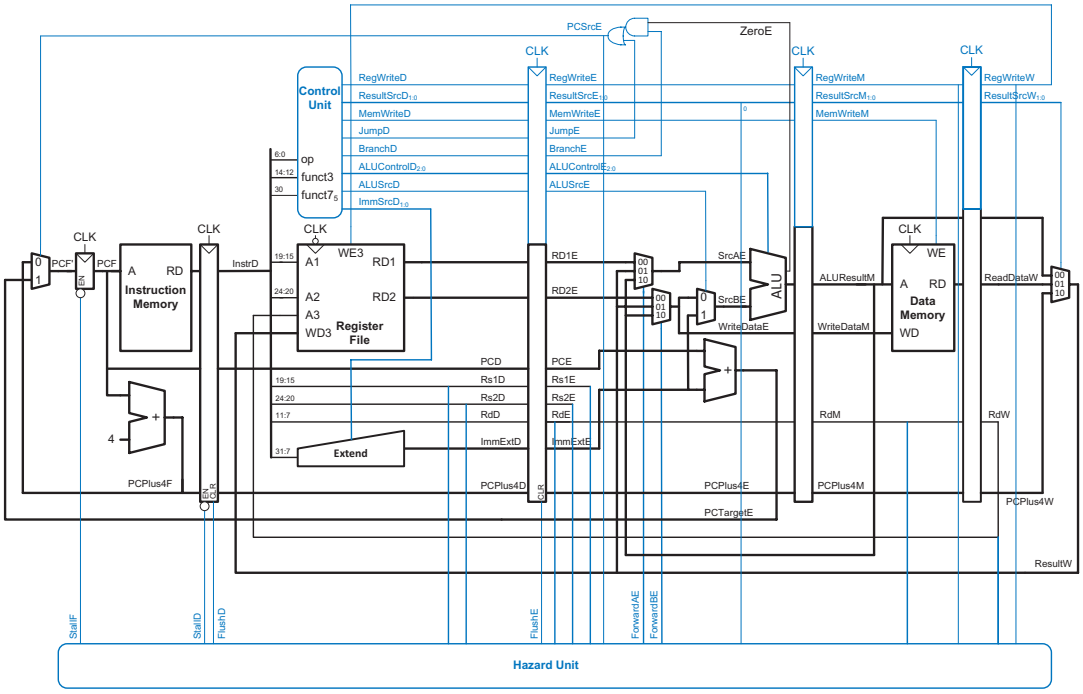

Figure 7.61 Pipelined processor with full hazard handling

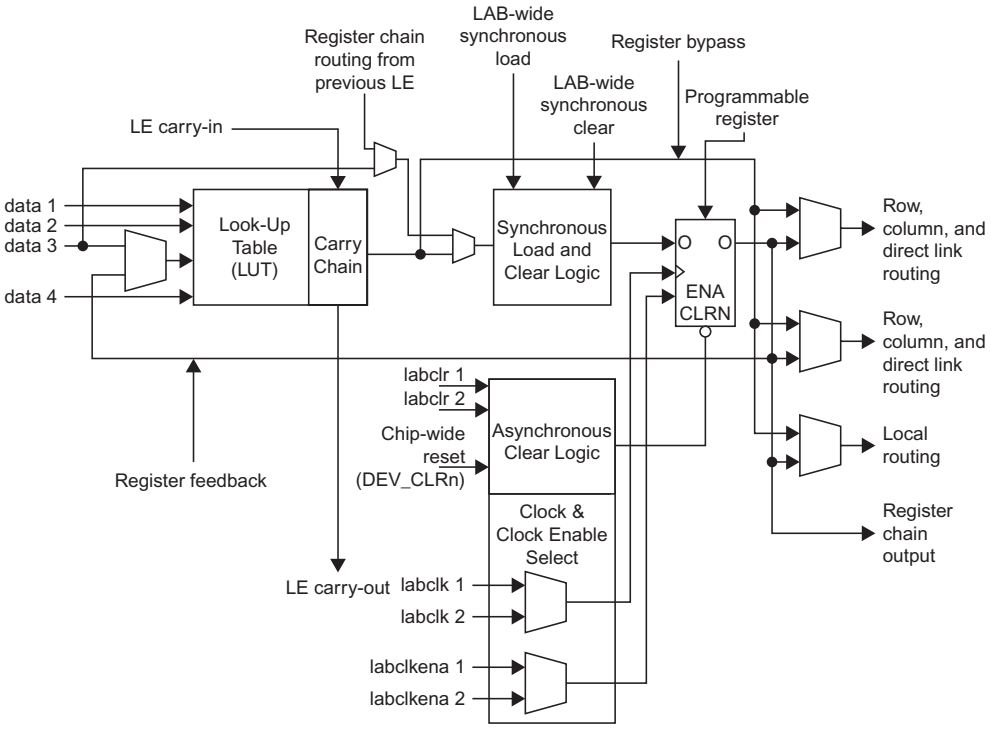

Figure 5.60 Cyclone IV Logic Element (LE)

(Reproduced with permission from the Altera Cyclone™ IV Handbook © 2010 Altera Corporation)