

CATALOGUE



MARINELLI
Costruzione Macchine Agricole
since 1927

CATALOGUE

Marzo 2015



FLI MARINELLI s.r.l.
Loc. Ponte Romano, 11
06028 Sigillo (PERUGIA) - ITALIA
Tel. e Fax +39 075.9177453
e-mail: fm.mar@libero.it
macchineagricolemarinelli@gmail.com
marinelliagriculturalmachinery.com

This catalogue overrules and replaces all the previous



MARINELLI
Costruzione Macchine Agricole

GENERAL SALES TERMS

1 Contract and prices

- 1.1 An order is construed as an irrevocable proposal of the customer
- 1.2 The contract is completed with the written acceptance of F.lli Marinelli s.r.l.
- 1.3 If the order confirmation, to be sent by registered mail, by e-mail, or by fax, contains differences with respect to the order and the customer fails to notify F.lli Marinelli s.r.l. of any objections to such differences within 15 days of receipt of the order confirmation, the changes shall be deemed to have been accepted in full. F.lli Marinelli s.r.l. and the customer conventionally agree that the customer's silence, protracted beyond 15 days from the date of reception of the order confirmation, shall be deemed to be paramount to a declaration of acceptance.

The prices are shown in Euro net of VAT

2 Drawings supplied by F.lli Marinelli

- 2.1 All drawings, photocopies, photographs, sketches and all other materials are the intellectual property of F.lli Marinelli s.r.l. and must be returned to said company.

3 Technical data

- 3.1 All technical data supplied by F.lli Marinelli s.r.l. are purely guideline and must always be checked by the customer.

4 Terms of delivery

- 4.1 The terms of delivery, which are calculated in working days, are purely guideline and shall anyway be suspended for the duration of any contractual default by the purchaser or in the event of the occurrence of events outside the control of F.lli Marinelli s.r.l. and due to events of force majeure.
- 4.2 If the purchaser remains in default for a period longer than 180 days, F.lli Marinelli s.r.l. can exercise its right to consider the contract to be terminated.

5 Warranty

- 5.1 F.lli Marinelli s.r.l. shall repair or replace, free of charge, any machines or parts of machines that it considers, at its sole discretion, to be unfit for purpose.
- 5.2 Any defects must be reported within 7 days from the date of discovery by sending a registered letter with notification of receipt, specifying the defects encountered in detail.
- 5.3 Replaced or repaired machines or parts will be shipped ex works free at SIGILLO in exchange for the defective articles to be repaired or replaced.
- 5.4 Unless otherwise agreed, the costs and liability for shipping of defective parts and repaired or replaced parts shall be borne by the customer.
- 5.5 Any and all possible claims for damage compensation are herewith excluded.
- 5.6 The customer's warranty coverage shall lapse immediately and irrevocably if the customer is in breach of contract at the time of the claim.
- 5.7 Also when the goods are subject to disputes, the customer shall not be entitled to suspend the regular fulfilment of its contractual obligations.
- 5.8 CONSUMABLES OF THE MACHINES ARE NOT COVERED BY THE WARRANTY

6 Seller's limited liability

- 6.1 The seller is released from all liability arising from damage to property other than the contractual goods, except in the case of malice or gross negligence.

7 Termination of the contract on the initiative of the customer

- 7.1 If the customer wishes to withdraw from the contract, it shall be required to cover all the costs incurred by F.lli Marinelli s.r.l. up to the moment of receipt of the withdrawal notice, in addition to an amount equivalent to 25% of the order price.
- 7.2 The customer can request contract termination only if the goods, despite any repairs carried out, is deemed to be unfit for purpose.

8 Payments

- 8.1 Conventionally and except in the presence of separate agreements between the parties, payments shall be made at the headquarters of F.lli Marinelli s.r.l.
- 8.2 In the case of payments in installment, extended payment interest will be charged at the official interest rate in force at the time of delivery of the goods, plus three percentage points. Interest must be paid in cash or using an equivalent method.
- 8.3 If the customer is granted the faculty to pay also interest charges on an extended basis, they shall be settled in such a way that the net income, calculated with the method of commercial discount to the rate mentioned above, is identical to the deferred capital.
- 8.4 Payments made after the agreed term will attract late payment interest at the official interest rate in force at the time, increased by four percentage points.
- 8.5 In the case of extended payment terms, non-payment of instalments (or even a single instalment of an amount greater than one eighth of the total price) shall cause the customer to forfeit its use of the extended payment term.
- 8.6 In the case of payment with bills of exchange, to secure delivery of the goods the customer must first send the seller the agreed guarantee coverage for the debt.

9 Contract termination

- 9.1 A reduction of the customer's financial guarantees or non-payment of instalments or even of a single instalment of an amount greater than one eighth of the total price, if extended payment terms have been granted, entitles F.lli Marinelli s.r.l. to terminate the contract, informing the customer by means of a registered letter with return receipt.
- 9.2 The instalments already paid will be withheld by Marinelli by way of indemnity, without prejudice to the right to claim compensation for any additional damages.

10 Court of jurisdiction and applicable law

- 10.1 The law court of Perugia shall have sole jurisdiction for any disputes or legal proceedings.

The contract and the obligations arising from it shall be governed by the articles of Italian law

The customer

In compliance with articles 1341 and 1342 of the Italian civil code, the customer hereby confirms its specific approval of the conditions set down above and, in particular, of the following clauses:

- 1 CONTRACT AND PRICES
- 4 TERMS OF DELIVERY
- 5 WARRANTY
- 6 LIMITATION OF SELLER'S LIABILITY
- 7 CONTRACT TERMINATION ON THE CUSTOMER'S INITIATIVE
- 8 PAYMENTS



MARINELLI
Costruzione Macchine Agricole

GENERAL CONDITIONS OF SALE

GENERAL SALES TERMS

- The data for operation and weight, and the figures shown in this price list are to be construed as approximate and not binding. In order to make product improvements where deemed necessary for technical reasons, the manufacturer reserves the right to make changes without notice.

PLOUGH

- 8 Universal hydraulic lift front ploughs
- 10 Mounted ploughs with hydraulic shifting
- 12 Three-furrow ploughs
- 13 Rippers
- 18 Mole Ripper

DISC HARROWS

- 20 Trailed stubble disc harrows
- 21 Trailed disc harrows
- 24 Mounted - trailed disc harrows
- 26 Trailed disc harrows
- 28 Mounted - trailed mono frame disc harrows
- 29 Trailed wheeled disc harrows
- 34 Mounted disc harrows

CULTIVATORS

- 38 No-Stop mounted cultivators
- 40 Chisel cultivators
- 41 No-Stop mounted grubbers
- 42 Chisel cultivators
- 43 Semi-mounted chisel cultivators for crawler tractors

SHREDDER

- 45 Hydraulic tilting chopper
- 47 Medium flail mowers
- 49 Heavy flail mowers



MARINELLI
Costruzione Macchine Agricole

INDICE

INDEX

**ATTREZZATURE
VARIE
VARIOUS
EQUIPMENTS**

- 51 Mounted grubbers
- 52 Mounted furrowers
- 53 Tiller grubbers
- 54 Mounted tine harrows
- 55 Mounted spring vibro cultivators
- 56 Mounted Minivibro cultivator
- 58 Trailed and mounted-trailed rollers
- 59 Mounted rollers
- 60 Trailed and mounted-trailed cast iron rollers
- 61 Trailed cast iron rollers
- 62 Trailed cast iron notched rollers
- 63 Universal implement trailers - Ripper trailers
- 64 Mounted loader - Jib crane
- 65 Grader blade and Super grader blade
- 66 Rock bucket
- 67 Rear round bale loader - Rotary ditcher
- 68 Mounted earth loader tipping
- 69 Rippers
- 70 Manure spreaders - Firewood bundler
- 71 Adjustable chisel plough




MARINELLI
Agricultural Machinery Builder

ARATRI
PLOUGH

UNIVERSAL FRONT PLOUGHS WITH HYDRAULIC LIFTING

Modello 1 AUM - 1 ½ AUM

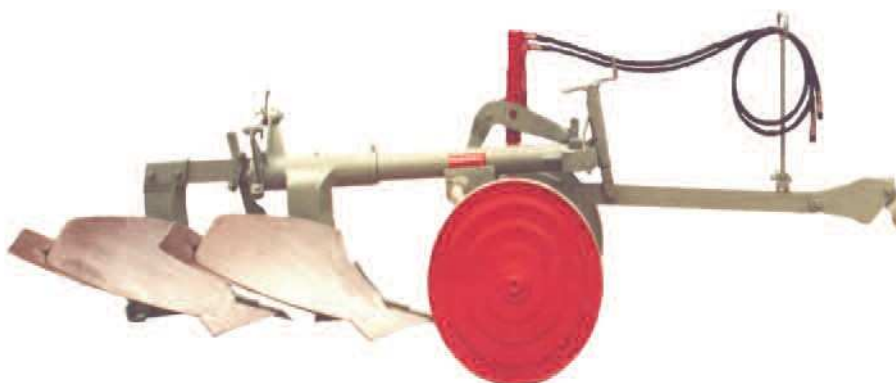


Model	Description	Directly fitted mouldboards	Weight	Work mm		HP	
			Kg.	Depth mm.	Width mm.		
1 AUM	Fixed carriage 1AUM		460				
	Single furrow M-1A	Mouldboard 2	230	420/450	450	55/80	
	Single furrow M-2	Mouldboard 2	250	470/490	500	55/80	
	Two-furrow B-00A	Mouldboard 0	340	350	720	55/80	
	Two-furrow B-0	Mouldboard 0	350	380	780	55/80	
	Two-furrow B-0A	Mouldboard 0	360	390/400	780	55/80	
1 ½ AUM	Fixed carriage 1 ½ AUM		520			80/100	
	Single furrow M-2	Mouldboard 2	280	470/490	500	80/100	
	Single furrow M-2A	Mouldboard 2	310	520	500	80/100	
	Two-furrow B-1	Mouldboard 1	450	400/420	850	80/100	
	Two-furrow B-1A	Mouldboard 1	500	420/440	880	80/100	

Accessories on demand

2° hydraulic cylinder for mouldboards
orientation

UNIVERSAL FRONT PLOUGHS WITH HYDRAULIC LIFT

Model 2 AUM

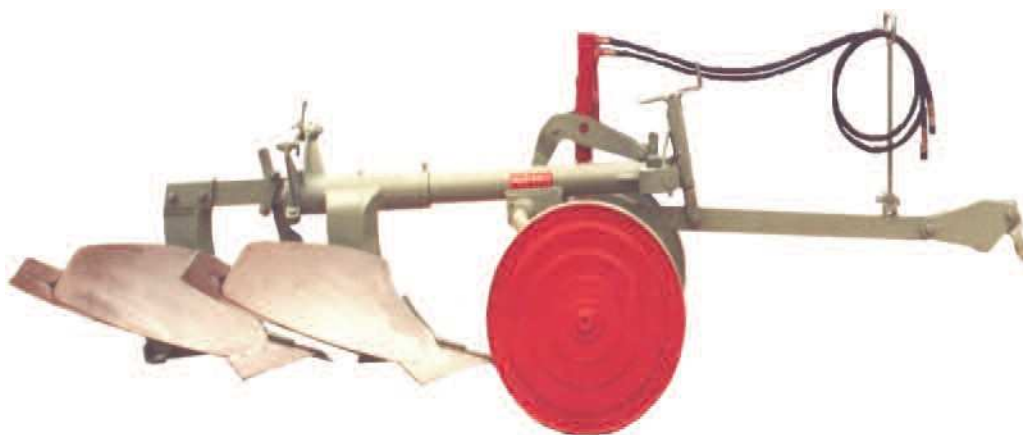

Model	Description	Directly fitted mouldboards	Weight	Work mm		HP	
			Kg.	Depthmm.	Width mm.		
2 AUM	Fixed carriage 2AUM		720				
	Single furrow M-2A	Corpo tipo 3	350	500	520	100/120	
	Two-furrow B-1	Corpo tipo 1	480	400/420	850	100/120	
	Two-furrow B-1A	Corpo tipo 1	500	420/440	880	100/120	
	Two-furrow B-1A	Corpo tipo 2	580	420/440	880	100/120	
	Two-furrow B-2	Corpo tipo 2	620	440/460	900	100/120	

Accessories on demand

2nd hydraulic cylinder for mouldboards
orientation

MOUNTED PLOUGHS

Models 0FM-1FM-1FM/S Three-point linkage Hydraulic shifting



Model	Description	Directly fitted mouldboards	Weight	Work		HP	
			Kg.	Depthmm.	Width mm.	Wheels	
0FM	Fixed carriage		130				
	Single-furrow M-0	Mouldboard 0	136	380	400	55/65	
	Single-furrow M-0A	Mouldboard 0	140	390/400	400	55/65	
	Two-furrow B-00	Mouldboard 00	210	300	700	55/65	
1FM 1FM/S	Fixed carriage		180				
	Steerable carriage		200				
	Single-furrow M-1	Mouldboard 1	220	400/420	430	70/100	
	Single-furrow M-1A	Mouldboard 1	230	420/440	470	70/100	
	Two-furrow B-00A	Mouldboard 0	350	350	780	70/100	
	Two-furrow B-0	Mouldboard 0	360	380	780	70/100	
	Two-furrow B-0A	Mouldboard 0	375	390/400	780	70/100	
	Two-furrow B-1	Mouldboard 1	430	400/420	850	70/100	

Accessories on demand	
Front discs with coulter (each)	
Front mouldboard with coulter (each)	

MOUNTED PLOUGHS

Modelli 2FM - 2FM/S
Three-point linkage
Hydraulic shifting



Model	Description	Directly fitted mouldboards	Weight	Work		HP	
			Kg.	Depthmm.	Width mm.	Wheels	
2FM 2FM/S	Fixed implement trailer		265				
	Steerable implement trailer		280				
	Single furrow M-2	Mouldboard type 2	310	470	500	110/150	
	Two-furrow B-1A	Mouldboard type 1	440	420/440	880	110/150	
	Two-furrow B-1A	Mouldboard type 2	470	420/440	880	110/150	
	Two-furrow B-2	Mouldboard type 2	500	440/460	900	110/150	

Accessories on demand

Front discs with coulter (each)

Front mouldboard with coulter (each)

THREE-FURROW PLOUGHS

Models 0BRMF - 1BRMF

0TRMF - 1TRMF

With double hydraulic shifting



Model	Description		Weight	Work		HP	
			Kg.	Depthmm.	Width mm.	Wheels	
0BRMF	Fixed two-furrow		530	380	800	70/90	
1BRMF	Fixed two-furrow		600	400	840	80/100	
0TRMF	Fixed three-furrow		740	380	1200	120/150	
1TRMF	Fixed three-furrow		800	400	1260	160/180	

Accessories on demand

Hydraulic cylinder for cross beam adjustment

RIPPERS

Series MEMO "No-Stop"
With hydropneumatic
safety device




Series	Model	Weight	Work		HP		Chassis	Shanks	
		Kg.	Depth mm.	Width mm.	Track	Wheels	Width mm.	Thick. mm.	
Memo	RML No-stop 5L	600	200/500	1900	70/90	90/120	1700	35	
	RML No-stop 5L	620	200/500	2100	70/90	90/120	2000	35	
	RMM No-stop 5M	760	200/600	2300	100/120	130/150	2000	35	
	RMP No-stop 5P	850	200/650	2500	120/160	160/180	2300	35	
	RMP No-stop 7P	1050	200/650	3000	120/160	180/220	2900	35	

Accessories on demand	
Depth wheels	
Reinforced depth wheels	
Top link for longitudinal transport for Memo 7 shank ripper	
Double mechanical roller for RML5 - RMM5 - RMP5	
Double mechanical roller for RMP7	
Double hydraulic roller for RML5 - RMM5 - RMP5	
Double hydraulic roller for RMP7	
Disc gang for RMM5M and RMP5P	
Disc gang for RMP Non-Stop 7P	
Winged "Exploder" tips for 5 shanks	
Winged "Exploder" tips for 7 shanks	

RIPPERS

ELFO "No-Stop" series

With hydropneumatic safety device

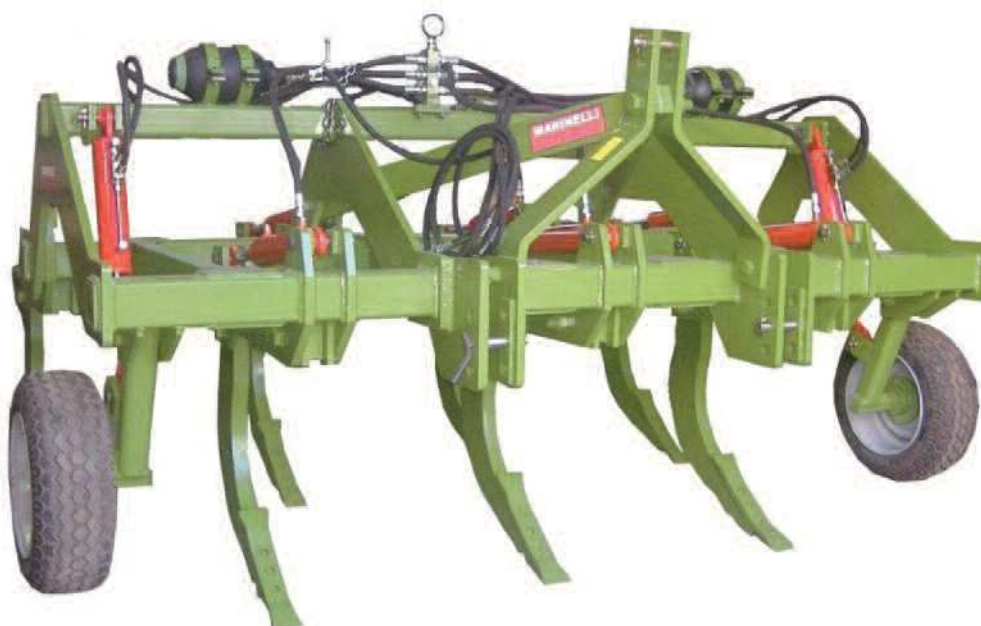

Series	Model	Weight	Work		HP		Chassis	Tines	
		Kg. Kg.	Prof.mm. Depthmm.	Largh. mm. Width mm.	Cingoli Track	Ruote Wheels	Largh. mm. Width mm.	Sp. mm. Thick. mm.	
Elfo	RML/No-stop/5E	1100	200/650	2500	120/160	150/220	2360	40	
	RMM/No-stop/7E	1400	200/650	3500	160/300	200/300	3360	40	
SuperElfo	RMM/No-stop/7SE	2180	200/650	3500	350/500	300/450	3000	50	

Accessories on demand									
Reinforced iron depth wheels with manual adjustment									
Rubber-tyred depth wheels with manual adjustment									
Rubber-tyred depth wheels with hydraulic adjustment									
Double Mechanical roller for RMP/5E									
Double Hydraulic roller for RMP/5E									
Double Mechanical roller for RMP/7E									
Double Hydraulic roller for RMP/7E									
Disc gang for S. ELFO 5 disc 610 thckns 5 and standard bearing support									
Disc gang for S. ELFO 7 disc 610 thckns 5 and standard bearing support									
Disc gang for S. ELFO 7 disc 660 thckns 6 and roller bearing support									
Winged "Exploder" tips for 5 shanks									
Winged "Exploder" tips for 7 shanks									

RIPPERS

Junior, Light, Medium, Heavy Series

Fixed and Junior RML3 adj. shanks



Series	Model	Weight	Work		HP		Chassis	Tines	
		Kg.	Depthmm.	Width mm.	Track	Wheels	Width mm.	Thick. mm.	
Junior	RML/3 Junior reg.	220	200/400	1600	45/70	55/80	1500	30	
	RML/5 Junior	280	200/400	1950	45/70	55/80	1700	30	
Light	RML/5 (a due tubi)	380	200/500	1950	60/70	80/110	1700	30	
	RML/5 (a due tubi)	390	200/550	2200	80/110	120/150	2000	30	
Medium	RMM/5 (a due tubi)	480	200/550	2200	80/110	120/150	2000	30	
Heavy	RMP/5 (a tre tubi)	600	200/600	2550	120/160	160/180	2300	35	
	RMP/7 (a tre tubi)	660	200/600	3000	120/180	160/200	2800	35	
Super-Heavy	RMP/5 (a tre tubi)	720	200/600	2550	120/160	160/180	2300	40	
	RMP/7 (a tre tubi)	850	200/600	3000	120/180	160/200	2800	40	

Accessories on demand

Depth wheels

Reinforced depth wheels

Top hitch for longitudinal transport for 7 shank ripper

Double Mechanical roller for RML/5 - RMM/5 - RMP/5

Double Mechanical roller for RMP/7

Double Hydraulic roller for RML/5 - RMM/5 - RMP/5

Double Hydraulic roller for RMP/7

Winged "Exploder" tips for 5 shanks

Winged "Exploder" tips for 7 shanks

COMBINATION RIPPERS

Medium, Heavy and Super-Heavy Series

With fixed shanks and disc section with hydraulic opening and depth adjustment

Medium Series

Disc gang with 560 mm notched or smooth discs and 14 mm shear bolt. 30 mm thick shank.

Heavy Series

Disc gang with 610 mm notched or smooth discs and 16 mm shear bolt. 35 mm thick shank.

Super-Heavy Series

Disc gang with 610 mm notched or smooth discs and 18 mm shear



Quotation on demand for different dimensions

Series	Model	Weight	Work		HP		Chassis	Tines	
		Kg.	Depthmm.	Width mm.	Track	Wheels	Width mm.	Thick. mm.	
Medium	RMM/5D56-10	800	200/600	2200	70/100	90/110	2000	35	
Heavy	RMP/5D61-11	980	200/600	2550	70/120	120/150	2550	35	
	RMP/7D61-12	1150	200/600	2800	100/150	160/180	2800	35	
Super-Heavy	RMSP/5D61-11	1080	200/600	2550	70/120	130/150	2550	40	
	RMSP/7D61-12	1270	200/600	2800	100/150	160/200	2800	40	

Accessories on demand	
Winged "Exploder" tips for 5 shanks	
Winged "Exploder" tips for 7 shanks	
Depth wheels	
Reinforced depth wheels	

STUBBLE-BREAKER RIPPERS WITH 3 SHANKS

Serie Super Elfo "No-Stop Series"



Series	Model	Weight	Work		HP		Chassis	Tines	
		Kg.	Depthmm.	Width mm.	Track	Wheels	Width mm.	Thick. mm.	
Super Elfo	RMP/No-Stop/3 SE	1650	500/1000	3500	350/500	300/450	3000	50	

Accessories on demand	
Reinforced iron depth wheels with manual adjustment	
Reinforced rubber-tyred depth wheels with manual adjustment	
Reinforced rubber-tyred depth wheels with hydraulic adjustment	

"TALPA" MOLE RIPPER

Single blade



Series	Model	Weight	Work		HP			
		Kg.	Depth mm.	Width mm.				
Light	RTM/60L	130	20/45					
Medium	RTM/65M	190	20/55					
Heavy	RTM/80P	320	30/70		70/90			
	RTM/100P	580	50/100		100/150			
Super-Heavy	RTM/100SP	720	50/100		130/180			



MARINELLI

Agricultural Machinery Builder

ERPICI FRANGIZOLLE
DISC HARROWS

TRAILED STUBBLE BREAKER DISC HARROW

Serie PDMG Gigante

(Pulverizers) with 2 "V" sections
With hydraulic sections angling device



Series	Model	Weight	Work		Discs			Axis	
			Kg. Kg.	Prof. mm. Depth mm.	Largh. mm. Width mm.	N.	Ø mm.	<---> mm.	
Giant	PDMG-18/66	1950			2350	18	660	270	40
	PDMG-20/66	2180			2600	20	660	270	40
	PDMG-22/66	2290			2880	22	660	270	40
	PDMG-24/66	2450			3150	24	660	270	40

Accessories on demand

Patented hydraulic device for independent adjustment of sections

TRAILED DISC HARROW

Serie PML

(Pulverizers) with 2 "V" sections
With hydraulic sections angling as standard



Series	Model	Weight	Work		Discs			Axis	
		Kg. Kg.	Prof.mm. Depthmm.	Largh. mm. Width mm.	N.	Ø mm.	<---> mm.	r	
Light	PML - 16/51	560		1650	16	510	210	30	
	PML - 18/51	610		1860	18	510	210	30	
	PML - 20/51	680		2100	20	510	210	30	
	PML - 22/51	720		2310	22	510	210	30	
	PML - 24/51	780		2550	24	510	210	30	
	PML - 28/51	910		2980	28	510	210	30	
Leight	PML - 16/56	610		1650	16	560	210	30	
	PML - 18/56	665		1860	18	560	210	30	
	PML - 20/56	740		2100	20	560	210	30	
	PML - 22/56	800		2310	22	560	210	30	
	PML - 24/56	850		2550	24	560	210	30	
	PML - 28/56	990		2980	28	560	210	30	

Accessories on demand

Patented hydraulic device for independent adjustment of sections

Deduction from net price for mechanical sections angling

Rubber-tyred transport wheels (2 wheels) for types PML 16/18/20/22

Rubber-tyred transport wheels (2 wheels) for types PML 24/28

TRAILED DISC HARROW

Serie PMM Series

(Pulverizers) with 2 "V" sections
With hydraulic sections angling as standard



Series	Model	Weight	Work		Discs			Axis	
			Kg. Kg.	Prof.mm. Depthmm.	Largh. mm. Width mm.	N.	Ø mm.	<-->mm.	
Medium	PMM - 16/51	610			1790	16	510	230	30
	PMM - 18/51	670			2020	18	510	230	30
	PMM - 20/51	730			2280	20	510	230	30
	PMM - 22/51	770			2530	22	510	230	30
	PMM - 24/51	830			2770	24	510	230	30
	PMM - 28/51	960			3200	28	510	230	30
Medium	PMM - 16/56	660			1790	16	560	230	30
	PMM - 18/56	715			2020	18	560	230	30
	PMM - 20/56	790			2280	20	560	230	30
	PMM - 22/56	850			2530	22	560	230	30
	PMM - 24/56	900			2770	24	560	230	30
	PMM - 28/56	1040			3200	28	560	230	30

Accessories on demand	
Patented hydraulic device for independent adjustment of sections	
Deduction from net price for mechanical sections angling	
Rubber-tyred transport wheels (2 wheels) for types PML 16/18/20/22	
Rubber-tyred transport wheels (2 wheels) for types PML 24/28	

TRAILED DISC HARROW

PMP Heavy Series

PMSP Super-Heavy Series

(Pulverizers) with 2 "V" sections

With hydraulic sections angling as standard



Series	Model	Weight	Work		Discs			Axis	
		Kg. Kg.	Prof.mm. Depthmm.	Largh. mm. Width mm.	N.	Ø mm.	<---> mm.	r	
Heavy	PMP - 16/56	850		1880	16	560	250	30	
	PMP - 18/56	925		2130	18	560	250	30	
	PMP - 20/56	1050		2380	20	560	250	30	
	PMP - 24/56	1240		2880	24	560	250	30	
	PMP - 28/56	1470		3380	28	560	250	30	
Heavy	PMP - 16/61	880		1880	16	610	250	30	
	PMP - 18/61	960		2130	18	610	250	30	
	PMP - 20/61	1140		2380	20	610	250	30	
	PMP - 24/61	1300		2880	24	610	250	30	
	PMP - 28/61	1550		3380	28	610	250	30	
Super-Heavy	PMSP - 16/56	1180		1880	16	560	250	30	
	PMSP - 18/56	1280		2130	18	560	250	30	
	PMSP - 20/56	1420		2380	20	560	250	30	
	PMSP - 24/56	1650		2880	24	560	250	30	
	PMSP - 28/56	1860		3380	28	560	250	30	
Super-Heavy	PMSP - 16/61	1230		1880	16	610	250	30	
	PMSP - 18/61	1310		2130	18	610	250	30	
	PMSP - 20/61	1500		2380	20	610	250	30	
	PMSP - 24/61	1720		2880	24	610	250	30	
	PMSP - 28/61	1870		3380	28	610	250	30	

Accessories on demand

Patented hydraulic device for independent adjustment of sections

Deduction from net price for mechanical sections angling

Rubber-tyred transport wheels (2 wheels) for types PMP 16/18

Rubber-tyred transport wheels (2 wheels) for types PMP 20/24

MOUNTED-TRAILED DISC HARROW

PMLPT Series

PMMPT series

(Pulverizers) with 2 "V" sections
With hydraulic sections angling as standard



Series	Model	Weight	Work		Discs			Axis	
		Kg. Kg.	Prof.mm. Depthmm.	Largh. mm. Width mm.	N.	Ø mm.	<--> mm.	r	
Light	PMLPT16	635		1650	16	510	210	30	
	PMLPT18	685		1860	18	510	210	30	
	PMLPT20	755		2100	20	510	210	30	
	PMLPT22	820		2330	22	510	210	30	
	PMLPT24	910		2550	24	510	210	30	
Light	PMLPT16	685		1650	16	560	210	30	
	PMLPT18	740		1860	18	560	210	30	
	PMLPT20	815		2100	20	560	210	30	
	PMLPT22	880		2330	22	560	210	30	
	PMLPT24	950		2550	24	560	210	30	
Medium	PMMPT 16	685		1790	16	510	230	30	
	PMMPT 18	735		2020	18	510	230	30	
	PMMPT 20	875		2280	20	510	230	30	
	PMMPT 22	950		2530	22	510	230	30	
	PMMPT 24	1100		2770	24	510	230	30	
Medium	PMMPT 16	735		1790	16	560	230	30	
	PMMPT 18	785		2020	18	560	230	30	
	PMMPT 20	925		2280	20	560	230	30	
	PMMPT 22	1020		2530	22	560	230	30	
	PMMPT 24	1180		2770	24	560	230	30	

Accessories on demand

Patented hydraulic device for independent adjustment of sections

Deduction from net price for mechanical sections angling

Rubber-tyred transport wheels (2 wheels) for types PMP 16/18 - 20/22

Rubber-tyred transport wheels (2 wheels) for types PMP 24/28

MOUNTED-TRAILED DISC HARROW

PMPPT Series

PMSPT Series

(Pulverizers) with 2 "V" sections
With hydraulic sections angling as standard



Series	Model	Weight	Work		Discs			Axis	
		Kg. Kg.	Prof. mm. Depth mm.	Largh. mm. Width mm.	N.	Ø mm.	<---> mm.	r	
Heavy	PMPPT 16	940		1880	16	560	250	30	
	PMPPT 18	1040		2130	18	560	250	30	
	PMPPT 20	1240		2380	20	560	250	30	
	PMPPT 22	1350		2630	22	560	250	30	
	PMPPT 24	1450		2880	24	560	250	30	
Heavy	PMPPT 16	980		1880	16	610	250	30	
	PMPPT 18	1100		2130	18	610	250	30	
	PMPPT 20	1300		2380	20	610	250	30	
	PMPPT 22	1400		2630	22	610	250	30	
	PMPPT 24	1500		2880	24	610	250	30	
Super-Heavy	PMSPT 16	1130		1880	16	560	250	30	
	PMSPT 18	1390		2130	18	560	250	30	
	PMSPT 20	1640		2380	20	560	250	30	
	PMSPT 22	1740		2630	22	560	250	30	
	PMSPT 24	1870		2880	24	560	250	30	
Super-Heavy	PMSPT 16	1180		1880	16	610	250	30	
	PMSPT 18	1450		2130	18	610	250	30	
	PMSPT 20	1700		2380	20	610	250	30	
	PMSPT 22	1800		2630	22	610	250	30	
	PMSPT 24	1930		2880	24	610	250	30	

Accessories on demand

Patented hydraulic device for independent adjustment of sections

Deduction from net price for mechanical sections angling

Rubber-tyred transport wheels (2 wheels) for types PMP 16/18

Rubber-tyred transport wheels (2 wheels) for types PMP 20/24

TRAILED DISC HARROW

The price includes:

hydraulic section angle adjustment device, longitudinal transport device (includes two hydraulic cylinders for transport wheels adjustment and one hydraulic cylinder for transport hitch adjustment)

PMPTL Heavy Series

with longitudinal transport

(Pulverizers) with 2 "V" sections

With silico-manganese steel discs mounted on two "V" sections.

Notched discs on the front section and smooth discs on the rear section or vice versa.

Pulverizers of this type are mounted on steel supports with steel spacers and hermetically sealed ball bearings.

All-smooth or all-notched discs can be fitted on request with no change in price.



Series	Model	Weight	Work		Discs			Axis	
		Kg. Kg.	Prof.mm. Depthmm.	Largh. mm. Width mm.	N.	Ø mm.	<-->mm.	r	
Heavy	PMPTL 20/56 long.	1400		2380	20	560	250	30	
	PMPTL 22/56 long.	1500		2630	22	560	250	30	
	PMPTL 24/56 long.	1610		2880	24	560	250	30	
	PMPTL 26/56 long.	1670		3130	26	560	250	30	
	PMPTL 28/56 long.	1820		3380	28	560	250	30	
	PMPTL 32/56 long.	1980		3880	32	560	250	30	
Heavy	PMPTL 20/61 long.	1460		2380	20	610	250	30	
	PMPTL 22/61 long.	1570		2630	22	610	250	30	
	PMPTL 24/61 long.	1680		2880	24	610	250	30	
	PMPTL 26/61 long.	1720		3130	26	610	250	32	
	PMPTL 28/61 long.	1900		3380	28	610	250	32	
	PMPTL 32/61 long.	2050		3880	32	610	250	32	

Accessories on demand	
Patented hydraulic device for independent adjustment of sections	

TRAILED DISC HARROW

PMPTP Heavy Series

with rear wheels transport

(Pulverizers) with 2 "V" sections

With silico-manganese steel discs mounted on two "V" sections.

Notched discs on the front section and smooth discs on the rear section or vice versa.

Pulverizers of this type are mounted on steel supports with steel spacers and hermetically sealed ball bearings.

All-smooth or all-notched discs can be fitted on request with no change in price.



Series	Model	Weight	Work		Discs			Axis	
		Kg. Kg.	Prof.mm. Depthmm.	Largh. mm. Width mm.	N.	Ø mm.	<-->mm.	r	
Heavy	PMPTP 16/56	850		1880	16	560	250	30	
	PMPTP 18/56	925		2130	18	560	250	30	
	PMPTP 20/56	1400		2380	20	560	250	30	
	PMPTP 22/56	1500		2630	22	560	250	30	
	PMPTP 24/56	1610		2880	24	560	250	30	
	PMPTP 26/56	1670		3130	26	560	250	30	
	PMPTP 28/56	1820		3380	28	560	250	30	
Heavy	PMPTP 16/61	880		1880	16	610	250	30	
	PMPTP 18/61	960		2130	18	610	250	30	
	PMPTP 20/61	1460		2380	20	610	250	30	
	PMPTP 22/61	1570		2630	22	610	250	30	
	PMPTP 24/61	1680		2880	24	610	250	30	
	PMPTP 26/61	1720		3130	26	610	250	32	
	PMPTP 28/61	1900		3380	28	610	250	32	

Accessories on demand

Patented hydraulic device for independent adjustment of sections

MOUNTED-TRAILED MONO FRAME DISC HARROW

ECONOMY series Light and Heavy (Pulverizers) with 2 "V" sections



Series	Model	Weight	Work		Discs			Axis	
		Kg. Kg.	Prof.mm. Depthmm.	Largh. mm. Width mm.	N.	Ø mm.	<-->mm.	r	
Leggera	Economy 16L	580		1770	16	510	225	25	
	Economy 18L	630		1960	18	510	225	25	
	Economy 20L	725		2200	20	510	225	25	
	Economy 22L	760		2450	22	510	225	25	
Leggera	Economy 16L	615		1770	16	560	225	25	
	Economy 18L	685		1960	18	560	225	25	
	Economy 20L	765		2200	20	560	225	25	
	Economy 22L	830		2450	22	560	225	25	
	Economy 24L	885		2660	24	560	225	25	
Pesante	Economy 16P	780		1770	16	610	225	30	
	Economy 18P	860		1960	18	610	225	30	
	Economy 20P	1050		2200	20	610	225	30	
	Economy 22P	1180		2450	22	610	225	30	
	Economy 24P	1270		2660	24	610	225	30	

Accessories on demand

Hydraulic sections angling device

Rubber-tyred transport wheels (2 wheels)

TRAILED WHEEL-MOUNTED DISC HARROW

ARGO Light Series

(Pulverizers) with 2 "V" sections

CS: single bearing with triple hermetic seal. With hydraulic device for independent sections angling



Series	Model	Weight	Work		Discs			Axis	
		Kg. Kg.	Prof.mm. Depthmm.	Largh. mm. Width mm.	N.	Ø mm.	<-->mm.	r	
Light	Argo 16L - CSD/23	1350		1790	16	560	230	30	
	Argo 18L - CSD/23	1400		2020	18	560	230	30	
	Argo 20L - CSD/23	1470		2280	20	560	230	30	
	Argo 22L - CSD/23	1550		2530	22	560	230	30	
	Argo 24L - CSD/23	1630		2770	24	560	230	30	
Light	Argo 16L - CSD/23	1400		1790	16	610	230	30	
	Argo 18L - CSD/23	1450		2020	18	610	230	30	
	Argo 20L - CSD/23	1520		2280	20	610	230	30	
	Argo 22L - CSD/23	1600		2530	22	610	230	30	
	Argo 24L - CSD/23	1680		2770	24	610	230	30	
Accessories on demand									
Lights									

TRAILED WHEEL-MOUNTED DISC HARROW

ARGO Medium Series

(Pulverizers) with 2 "V" sections

CS: single bearing with triple hermetic

seal. DC: double taper roller bearing

With independent sections hydraulic
angling device



Series	Model	Weight	Work		Discs			Axis	
		Kg. Kg.	Prof.mm. Depthmm.	Largh. mm. Width mm.	N.	Ø mm.	<-->mm.	r	
Medium	Argo 20M - CSD/23	1800		2280	20	610	230	30	
	Argo 22M - CSD/23	1850		2530	22	610	230	30	
	Argo 24M - CSD/23	1950		2770	24	610	230	30	
	Argo 26M - CSD/23	2100		2980	26	610	230	30	
	Argo 28M - CSD/23	2300		3200	28	610	230	30	
Medium	Argo 20M - CSD/25	1850		2380	20	610	250	30	
	Argo 22M - CSD/25	1920		2630	22	610	250	30	
	Argo 24M - CSD/25	2000		2880	24	610	250	30	
	Argo 26M - CSD/25	2150		3130	26	610	250	30	
	Argo 28M - CSD/25	2400		3380	28	610	250	30	
Medium	Argo 20M - DC D/25	2000		2380	20	610	250	30	
	Argo 22M - DC D/25	2070		2630	22	610	250	30	
	Argo 24M - DC D/25	2150		2880	24	610	250	30	
	Argo 26M - DC D/25	2300		3130	26	610	250	30	
	Argo 28M - DC D/25	2550		3380	28	610	250	30	

Accessories on demand

Lights

13.0/55-16 oversized wheels

TRAILED WHEEL-MOUNTED DISC HARROW

ARGO Heavy and Super-Heavy Series

(Pulverizers) with 2 "V" sections

CS: single bearing with triple hermetic seal. DC: double taper roller bearing

With independent sections hydraulic angling device



Series	Model	Weight	Work		Discs			Axis	
		Kg. Kg.	Prof.mm. Depthmm.	Largh. mm. Width mm.	N.	Ø mm.	<-->mm.	r	
Heavy	Argo 20P - CSD/25	2250		2380	20	610	250	30	
	Argo 22P - CSD/25	2320		2630	22	610	250	30	
	Argo 24P - CSD/25	2400		2880	24	610	250	30	
	Argo 26P - CSD/25	2500		3130	26	610	250	30	
	Argo 28P - CSD/25	2700		3380	28	610	250	30	
Super-Heavy	Argo 20SP - CSD/25	2450		2380	20	660	250	40	
	Argo 22SP - CSD/25	2550		2630	22	660	250	40	
	Argo 24SP - CSD/25	2650		2880	24	660	250	40	
	Argo 26SP - CSD/25	2750		3130	26	660	250	40	
	Argo 28SP - CSD/25	2900		3380	28	660	250	40	
Super-Heavy	Argo 20SP - CSD/27	2500		2600	20	660	270	40	
	Argo 22SP - CSD/27	2600		2880	22	660	270	40	
	Argo 24SP - CSD/27	2700		3150	24	660	270	40	
	Argo 26SP - CSD/27	2800		3420	26	660	270	40	
	Argo 28SP - CSD/27	2950		3700	28	660	270	40	

Accessories on demand

Lights

13.0/55-16 oversized wheels

TRAILED WHEEL-MOUNTED DISC HARROW

STEALTH Medium Series with hybrid (I) box section / sheet steel frame

(Pulverizers) with 4 "X" sections,
hydraulically foldable for road
transport

CS: single bearing with triple hermetic
seal DC: double bearing

With independent sections hydraulic
angling device



Series	Model	Weight	Work		Discs			Axis	
		Kg. Kg.	Prof.mm. Depthmm.	Largh. mm. Width mm.	N.	Ø mm.	<-->mm.	r	
Medium	StealthI -20R/25- CS	1880		2500	20	610	250	30	
	StealthI -24R/25- CS	2150		3000	24	610	250	30	
Medium	StealthI -20R/25- DC	2030		2500	20	610	250	30	
	StealthI -24R/25- DC	2300		3000	24	610	250	30	
	StealthI -28R/25- DC	2550		3500	28	610	250	30	
	StealthI -32R/25- DC	2800		4000	32	610	250	30	
Medium	StealthI -20R/25- DC	2130		2500	20	610	250	40	
	StealthI -24R/25- DC	2400		3000	24	610	250	40	
	StealthI -28R/25- DC	2670		3500	28	610	250	40	
	StealthI -32R/25- DC	2950		4000	32	610	250	40	

Accessories on demand

Lights

13.0/55-16 oversized wheels

TRAILED WHEEL-MOUNTED DISC HARROW

STEALTH Heavy and Super-Heavy Series with box section sheet steel chassis (L) (Pulverizers)
with 4 "X" sections that can be closed hydraulically for road transport

CS: single bearing with triple hermetic seal. DC: double taper roller bearing
With independent sections hydraulic angling device



Series	Model	Weight	Work		Discs			Axis	
			Kg. Kg.	Prof.mm. Depthmm.	Largh. mm. Width mm.	N.	Ø mm.	<-->mm.	
Heavy	StealthL-20R/25-CS	2250			2500	20	610	250	30
	StealthL-20R/25-DC	2350			2500	20	610	250	30
	StealthL-24R/25-DC	2700			3000	24	610	250	30
Heavy	StealthL-20R/25-DC	2400			2500	20	610	250	40
	StealthL-24R/25-DC	2800			3000	24	610	250	40
	StealthL-28R/25-DC	3000			3500	28	610	250	40
Heavy	StealthL-20R/25-DC	2500			2500	20	660	250	40
	StealthL-24R/25-DC	2900			3000	24	660	250	40
	StealthL-28R/25-DC	3100			3500	28	660	250	40
	StealthL-32R/25-DC	3500			4000	32	660	250	40
Super-Heavy	StealthL-20R/25-DC	2560			2660	20	660	270	40
	StealthL-24R/25-DC	3000			3200	24	660	270	40
	StealthL-28R/25-DC	3250			3750	28	660	270	40
	StealthL-32R/25-DC	3700			4300	32	660	270	40

Accessories on demand	
Lights	
13.0/55-16 oversized wheels	
rear hydraulic top link to hitch harrow, roller, vibro-cultivator, etc.	
Tine harrow, roller, vibro-cultivator	

MOUNTED DISC HARROW

RIX Eco Series

With 4 fixed or hydraulically
adjustable sections Manual sections
adjustment



Series	Model	Weight	Work		Discs			Axis	
		Kg. Kg.	Prof.mm. Depthmm.	Largh. mm. Width mm.	N.	Ø mm.	<-->mm.	r	
Eco	Rix12ECO/18fisso	675		1300	12	510	180	30	
	Rix 12 ECO/18spost. idr.	710		1300	12	510	180	30	
	Rix16ECO/18fisso	760		1650	16	510	180	30	
	Rix 16 ECO/18spost. idr.	800		1650	16	510	180	30	
	Rix20ECO/18spost. idr.	900		2010	20	510	180	30	
Eco	Rix12ECO/21 fisso	690		1550	12	510	210	30	
	Rix 12 ECO/21 spost. idr.	730		1550	12	510	210	30	
	Rix16ECO/21 fisso	780		1850	16	510	210	30	
	Rix 16 ECO/21 spost. idr.	820		1850	16	510	210	30	
	Rix20ECO/21 spost. idr.	920		2270	20	510	210	30	

Accessories on demand	
Front disc plough	
Ballast 50 kg	
Adjustable side boards	

MOUNTED DISC HARROW

RIX Light Series

With 4 fixed sections or with double hydraulic shifting

With hydraulic or mechanical sections angling device



Series	Model	Weight	Work		Discs			Axis	
		Kg. Kg.	Prof.mm. Depthmm.	Largh. mm. Width mm.	N.	Ø mm.	<-->mm.	r	
Light	Rix 12 L/18 fisso	620		1300	12	510	180	30	
	Rix 12 L/18 spost. Idr.	665		1300	12	510	180	30	
	Rix 16 L/18 fisso	710		1650	16	510	180	30	
	Rix 16 L/18 spost. idr.	755		1650	16	510	180	30	
	Rix 20 L/18 spost. idr.	855		2010	20	510	180	30	
Light	Rix 12 L/21 fisso	650		1550	12	510	210	30	
	Rix 12 L/21 spost. idr.	690		1550	12	510	210	30	
	Rix 16 L/21 fisso	740		1850	16	510	210	30	
	Rix 16 L/21 spost. idr.	780		1850	16	510	210	30	
	Rix 20 L/21 spost. idr.	880		2270	20	510	210	30	

Accessories on demand

Front disc plough

Adjustable side boards

MOUNTED DISC HARROW

RIX Medium and Heavy Series

With 4 fixed sections or with double hydraulic angling

With hydraulic or mechanical sections angling device.



Series	Model	Weight	Work		Discs			Axis	
		Kg. Kg.	Prof.mm. Depthmm.	Largh. mm. Width mm.	N.	Ø mm.	<-->mm.	r	
Heavy	Rix 12P/18 fisso	750		1300	12	510	180	30	
	Rix 12P/18 spost. idr.	790		1300	12	510	180	30	
	Rix 16P/18 fisso	840		1650	16	510	180	30	
	Rix 16P/18 spost. idr.	880		1650	16	510	180	30	
	Rix 20P/18 spost. idr.	980		2010	20	510	180	30	
Medium	Rix 12M/18 fisso	720		1300	12	510	180	30	
	Rix 12M/18 spost. idr.	760		1300	12	510	180	30	
	Rix 16M/18 fisso	800		1650	16	510	180	30	
	Rix 16M/18 spost. idr.	840		1650	16	510	180	30	
	Rix 20M/18 spost. idr.	940		2010	20	510	180	30	
Heavy	Rix 12P/21 fisso	780		1550	12	510	210	30	
	Rix 12P/21 spost. idr.	820		1550	12	510	210	30	
	Rix 16P/21 fisso	870		1850	16	510	210	30	
	Rix 16P/21 spost. idr.	910		1850	16	510	210	30	
	Rix 20P/21 spost. idr.	1010		2270	20	510	210	30	
Medium	Rix 12M/21 fisso	740		1550	12	510	210	30	
	Rix 12M/21 spost. idr.	780		1550	12	510	210	30	
	Rix 16M/21 fisso	820		1850	16	510	210	30	
	Rix 16M/21 spost. idr.	860		1850	16	510	210	30	
	Rix 20M/21 spost. idr.	1060		2270	16	510	210	30	

Accessories on demand

Front disc plough

Adjustable side boards



MARINELLI
Costruzione Macchine Agricole

COLTIVATORI
CULTIVATORS

NON-STOP MOUNTED GRUBBERS

HOBBIT Mini series for vineyards Light and Medium Series

With hydropneumatic
safety device




Series	Model	Weight	Work		HP		Clearance	Tines	
		Kg. Kg.	Prof.mm. Depthmm.	Largh. mm. Width mm.	Cingoli Track	Ruote Wheels	mm. mm.	N. N.	
Light	CMIP 5FL/120	420	300	1350	40/60	50/60	650	5	
	CMIP 5FL/140	430	300	1550	40/60	50/60	650	5	
	CMIP 5FL/160	440	300	1750	50/70	50/70	650	5	
	CMIP 7FL/180	530	300	2000	60/70	70/95	650	7	
Medium	CMIP 5FM/120	450	300	1400	40/60	50/60	650	5	
	CMIP 5FM/140	460	300	1500	40/60	50/60	650	5	
	CMIP 5FM/160	470	300	1800	50/70	50/70	650	5	
	CMIP 7FM/180	580	300	2000	60/70	70/95	650	7	

Accessories on demand	
Pair of depth wheels, small type	
Hydraulic Cambridge roller for 5 shank version	
Hydraulic Cambridge roller for 7 shank version	

NON-STOP MOUNTED GRUBBERS

HOBBIT Series
Heavy Series
 With hydropneumatic
 safety device

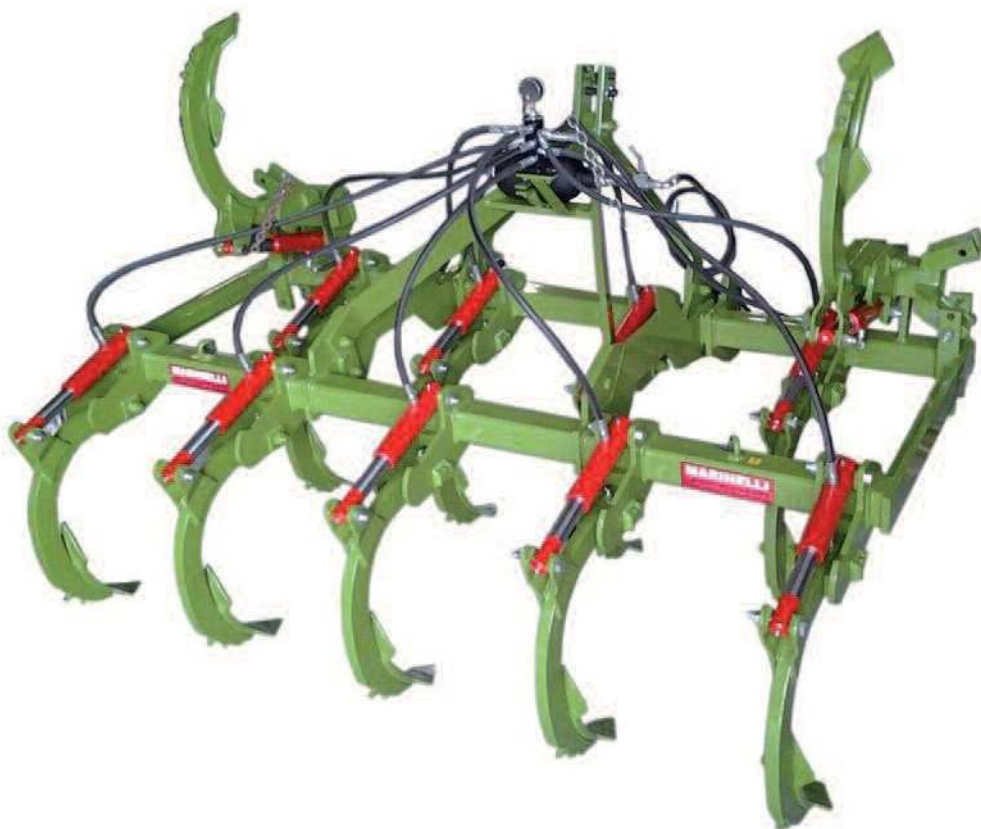

Series	Model	Weight	Work		HP		Clearance	Tines	
		Kg. Kg.	Prof.mm. Depthmm.	Largh. mm. Width mm.	Cingoli Track	Ruote Wheels	mm. mm.	N. N.	
Heavy	CMIP 5FP/120	470	350	1400	40/60	50/60	700	5	
	CMIP 5FP/140	485	350	1600	40/60	50/60	700	5	
	CMIP 5FP/160	500	350	1800	50/70	60/70	700	5	
	CMIP 7FP/180	620	350	2000	60/70	70/95	700	7	
	CMIP 9FP/240	750	350	2700	80/100	100/130	700	9	
	CMIP 11FP/300	890	350	3400	100/120	130/150	700	11	
	CMIP 9RP/Mecc	790	350	2000+700	100/120	100/130	700	7+2	
	CMIP 11RP/Mecc	920	350	2700+700	100/120	130/150	700	9+2	

Accessories on demand	
Pair of depth wheels	
Pair of reinforced depth wheels	
Single hydraulic Cambridge roller	
Double hydraulic Cambridge roller	
100x35 SP type shank surcharge	

CHISEL CULTIVATORS

Double blade 55x25 rigid



Series	Model	Weight	Work		HP		Tines	
		Kg. Kg.	Prof. mm. Depth mm.	Largh. mm. Width mm.	Cingoli Track	Ruote Wheels		
	CHMP 7F (2 file)	400	100/350	1900	50/70	45/50	7	
	CHMP 9F (2 file)	480	100/350	2500	70/90	50/60	9	
	CHMP 11F (2 file)	540	100/350	3000	90/110	60/70	11	
	CHMP 7R 5+2 (2 file)	470	100/350	1900	50/70	45/50	7	
	CHMP 9R 7+2 (2 file)	530	100/350	2500	70/90	50/60	9	
	CHMP 11R 9+2 (2 file)	590	100/350	3000	90/110	60/70	11	
	CHMP 9F (3 file)	700	100/350	2500	90/110	60/70	9	
	CHMP 11R 9+2 (3 file)	780	100/350	2500	90/110	60/70	11	
	CHMP 13R 11+2 (3 file)	920	100/350	3100	110/130	70/80	13	
	CHMP 15R 13+2 (3 file)	1200	100/350	3600	130/150	80/100	15	

Accessories on demand

Pair of iron depth wheels

Pair of rubber-tyred depth wheels

NON-STOP MOUNTED GRUBBERS

With hydropneumatic
safety device



Series	Model	Weight	Work		HP		Clearance	Tines	
		Kg. Kg.	Prof.mm. Depthmm.	Largh. mm. Width mm.	Cingoli Track	Ruote Wheels	mm. mm.	N. N.	
Light	EMIP 5F	380	300	1320	40/60	50/60	600	5	
	EMIP 7F	530	300	1870	60/70	70/95	600	7	
Medium	EMIP 5F	410	300	1320	40/60	50/60	600	5	
	EMIP 7F	560	300	1870	60/70	70/95	600	7	
	EMIP 9F	660	300	2420	80/100	100/130	600	9	
	EMIP 11F	780	300	297	100/120	130/150	600	11	
	EMIP 9R/Mecc	690	300	1870+550	100/120	100/130	600	7+2	
	EMIP 11R/Mecc	810	300	2420+550	100/120	130/150	600	9+2	
	EMIP 13R/Mecc	930	300	2970+550	120/150	150/180	600	11+2	
	EMIP 13R/Idr	990	300	2420+1100	120/150	150/180	600	9+4	

Accessories on demand	
Pair of depth wheels, small type	
Pair of depth wheels, large type	
Hydraulic Cambridge roller	

CHISEL CULTIVATORS

With square coil 25, 25-30, 30-35, 35



Model	Weight	Work		HP		Tines	
		Kg. Kg.	Prof. mm. Depth mm.	Largh. mm. Width mm.	Cingoli Track	Ruote Wheels	
CHMP5L (2 file) molla Q25	130		100/350	1300	45/50	50/70	5
CHMP7L (2 file) molla Q25	180		100/350	1500	45/50	50/70	7
CHMP9L (2 file) molla Q25	215		100/350	1800	50/60	70/90	9
CHMP11L (2 file) molla Q25	250		100/350	2200	60/70	90/110	11
CHMP7M (2 file) molla Q30	230		100/350	1500	45/50	50/70	7
CHMP9M (2 file) molla Q30	290		100/350	1900	50/60	70/90	9
CHMP11M (2 file) molla Q30	350		100/350	2300	60/70	90/110	11
CHMP13M (2 file) molla Q30	375		100/350	2500	60/70	90/110	13
CHMP9P (2 file) molla Q35	340		100/350	1900	50/60	70/90	9
CHMP11P (2 file) molla Q35	410		100/350	2300	60/70	90/110	11
CHMP11P (3 file) molla Q35	600		100/350	2500	60/70	90/110	11
CHMP13PR 11+2 (3 file) molla Q35	720		100/350	2900	70/80	110/130	13
CHMP15PR 11+4 (3 file) idr. molla Q35	1000		100/350	3300	80/100	130/150	15

Accessories on demand

Pair of depth wheels

Pair of reinforced depth wheels

SEMI-MOUNTED CHISEL CULTIVATOR FOR CRAWLER TRACTORS

Double blade 55x25 rigid



Series	Model	Weight	Work		HP		Tines	
			Kg. Kg.	Prof.mm. Depth mm.	Largh. mm. Width mm.	Cingoli Track	Ruote Wheels	
Light	CHMP7F (2file)	950	100/300	2300	45/50	80/110	7	
	CHMP9F (2file)	1180	100/300	3000	50/60	120/160	9	

Accessories on demand	
Pair of iron depth wheels	



MARINELLI
Costruzione Macchine Agricole

TRINCIATUTTO
SHREDDER

HYDRAULIC TILTING CHOPPER

For compact tractors

TMLP Evo

Intelligence Series

With flail hammers for pruning of limbs up to 5 cm in diameter

Standard

equipment: **3-point**

hitch with

standard

driveshaft

- Gearbox with internal freewheel

- Mechanical safety system

- Hammers or knives

- Body reinforced with double sheet steel

Hydraulic cylinders complete

with valves Impact dampening

system during work operations

(SAA Intelligence)



- Front stone guard strips

- Support foot

- Rear roller

- Side skids

Safety protections in compliance with EC directives

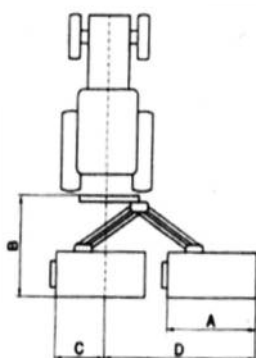

Series	Model	Weight	A	B	C	D	HP	Ham mers
		Kg. Kg.	mm. mm.	mm. mm.	mm. mm.	mm. mm.		N. N.
	TMPLEVO140	420	1400	1400	600	2100	40/60	12
	TMPLEVO160	450	1600	1400	600	2300	60/80	14
	TMPLEVO180	480	1800	1400	600	2500	60/80	14

Accessories on demand

CV driveshaft

HYDRAULIC TILTING CHOPPER



TMPLI series

With flail hammers for medium pruning of limbs of up to 10 cm in diameter

Standard equipment:

- Gearbox with internal freewheel
- Mechanical safety system
- Hammers or knives
- Reinforced double sheet steel body
- Front stone guard strips
- Support foot
- Rear roller
- Side skids

Safety protections in compliance with EC directives

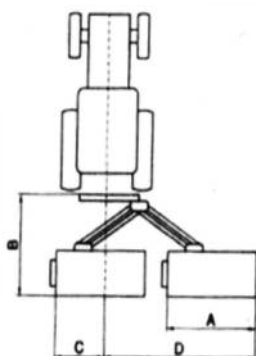

Series	Model	Weight	A	B	C	D	HP	Ham mers	
		Kg. Kg.	mm. mm.	mm. mm.	mm. mm.	mm. mm.		N. N.	
	TMPLI160	510	1600	1800	750	2300	50/60	14	
	TMPLI 180	570	1800	1800	750	2550	65/75	14	
	TMPLI 200	630	2000	1800	750	2750	80/100	16	

Accessories on demand

Standard Driveshaft

CV driveshaft

MEDIUM FLAIL MOWER

MTSA series

With universal knives or hammers for grass, pruning of limbs up to 8 cm in diameter, green areas, vineyard clippings, etc. Rugged and versatile, guarantees the maximum productivity.

Standard equipment:

- Three-point hitch with 2 positions
- Gearbox with internal freewheel
- Mechanical safety system
- Hammers or universal knives
- Reinforced double sheet steel body
- Front stone guard strips
- Support foot
- Rear roller
- Side skids
- Safety protections in compliance with EC directives



Series	Model	Weight	Work	Dimensions	Blades	Hammers	HP	
		Kg. Kg.	Largh. mm. Width mm.	LxPxH mm. WxDxH mm.	N. N.	N. N.		
	MTSA 120	300	1200	1400x800x900	16	8	30/35	
	MTSA 130	320	1300	1500x800x900	20	10	30/35	
	MTSA 140	350	1400	1600x800x900	24	12	35/40	
	MTSA 150	390	1500	1700x800x900	24	12	35/40	
	MTSA 160	410	1600	1800x800x900	28	14	40/45	
	MTSA 180	440	1800	2000x800x900	28	14	45/50	
	MTSA 200	470	2000	2200x800x900	32	16	50/55	

Accessories on demand	MTSA 120/130	MTSA 140	MTSA 150	MTSA 160	MTSA 180	MTSA 200
Rear legs						
Standard driveshaft						
Hitch with hydraulic sideshift						
Hitch with mechanical sideshift						

HEAVY FLAIL MOWER

MTSAP series

With universal knives or hammers for grass, pruning of limbs up to 8 cm in diameter, green areas, vineyard clippings, etc. Rugged and versatile, guarantees reliability and durability.

Standard equipment:

- Gearbox with internal freewheel
- Hammers or universal knives
- Reinforced double sheet steel body
- Front stone guard strips
- Support foot
- Rear roller
- Side skids
- Safety protections in compliance with EC directives



Series	Model	Weight	Work	Dimensions	Blades	Hammers	HP	
		Kg. Kg.	Largh. mm. Width mm.	LxPxHmm. WxDxH mm.	N. N.	N. N.		
	MTSAP160	560	1600	1850x95x1000	28	14	40/45	
	MTSAP180	600	1800	2050x95x1000	28	14	50/55	
	MTSAP200	680	2000	2250x95x1000	32	16	55/60	
	MTSAP220	700	2200	2450x95x1000	36	18	60/65	
	MTSAP240	730	2400	2650x95x1000	36	18	65/70	

Accessories on demand	MTSAP160	MTSAP180	MTSAP200	MTSAP220	MTSAP240
Front protective chains					
Rear legs					
Standard driveshaft					
Hitch with hydraulic sideshift					
Hitch with mechanical sideshift					

HEAVY FLAIL MOWER

MTSAPR series Reversible with double hitch

With universal knives or hammers for grass, pruning of limbs up to 8 cm in diameter, green areas, vineyard clippings, stalks of maize, sunflowers, soya, etc. Rugged and versatile, flail mowers can be used in a wide variety of situations.

Standard equipment:

- Double drawbar
- Gearbox with internal freewheel
- Hammers or universal knives
- Reinforced double sheet steel body
- Front stone guard strips
- Support foot
- Rear roller
- Side skids
- Safety protections in compliance with EC directives



Series	Model	Weight	Work	Dimensions	Blades	Hammers	HP	
		Kg. Kg.	Largh. mm. Width mm.	LxPxHmm. WxDxH mm.	N. N.	N. N.		
	MTSAP R160	630	1600	1850x95x1000	28	14	40/45	
	MTSAP R180	670	1800	2050x95x1000	28	14	50/55	
	MTSAP R200	750	2000	2250x95x1000	32	16	55/60	
	MTSAP R220	780	2200	2450x95x1000	36	18	60/65	
	MTSAP R240	810	2400	2650x95x1000	36	18	65/70	

Accessories on demand	MTSAP R160	MTSAP R180	MTSAP R200	MTSAP R220	MTSAP R240
Front protective chains					
Rear legs					
Standard driveshaft					
Hitch with hydraulic sideshift					
Hitch with mechanical sideshift					
Step-up gear unit with two independent shafts or double freewheel					




MARINELLI
Costruzione Macchine Agricole

ATTREZZATURE VARIE
VARIOUS EQUIPMENTS

MOUNTED GRUBBERS

With shear bolt

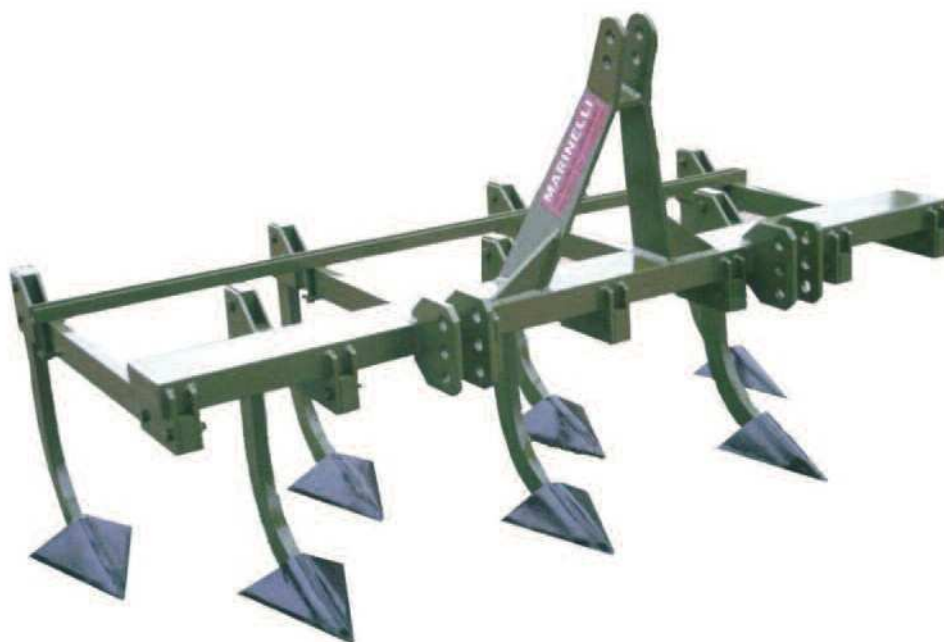

Series	Model	Weight	Work		Tines		Spades	HP	
		Kg. Kg.	Prof.mm. Depthmm.	Largh. mm. Width mm.	N. N.	Dimensioni mm. Dimensions mm.	mm. mm.		
	EMPB 7	220		1900	7	60x25	230	40/50	
Medium	EMPB 7	243		1900	7	60x30	230	50/60	
	EMPB 7	320		2100	7	70x30	250	60/70	
	EMPB 9	450		2400	9	70x30	250	70/80	
	EMPB 9	490		2500	9	80x35	280	90/120	
Accessories on demand									
Pair of depth-wheels									

MOUNTED GRUBBERS



Series	Model	Weight	Work		Tines		Spades	HP	
		Kg. Kg.	Prof.mm. Depth mm.	Largh. mm. Width mm.	N. N.	Dimensioni mm. Dimensions mm.	mm. mm.		
Medium	EMP 7	200		1900	7	60x25	230	40/50	
	EMP 7	223		1900	7	60x30	230	50/60	
	EMP 7	301		2100	7	70x30	250	60/70	
	EMP 9	410		2400	9	70x30	250	70/80	
	EMP 9	440		2500	9	90x35	280	90/120	
Accessories on demand									
Pair of depth-wheels									

MOUNTED FURROWERS



Series	Model	Weight	Work						
		Kg. Kg.	Prof.mm. Depthmm.	Largh. mm. Width mm.					
Light	AMPL 140/3	120		1400					
	AMPL 160/3	140		1600					
	AMPL 180/3	160		1800					
	AMPL 200/3	180		2000					
Heavy	AMPP 160/3	170		1600					
	AMPP 180/3	180		1800					
	AMPP 200/3	200		2000					
	AMPP 300/3	270		3000					

TILLER GRUBBERS

Light, Medium and Heavy Series



Series	Model	Weight	Work		HP		Tines	
		Kg. Kg.	Prof.mm. Depthmm.	Largh. mm. Width mm.	Cingoli Track	Ruote Wheels	N. N.	
Light	TML 5	105	150	1100		20/30	5	
	TML 7	140	150	1550		30/40	7	
	TML 9	185	150	2000		40/50	9	
Medium	TMM5	145	180	1250	25/30	30/35	5	
	TMM7	190	200	1750	30/40	35/40	7	
	TMM9	250	200	2250	40/50	45/60	9	
	TMM 11	305	220	2500	50/60	60/70	11	
	TMM 9R	280	200	2250	40/50	45/60	9	
	TMM 11R	335	220	2500	50/60	60/70	11	
	TMM 13R	420	220	2500	60/70	70/80	13	
Medium	TMP 7	315	250	1750		60/80	7	
	TMP 9	400	250	2250		80/100	9	
	TMP 11	470	250	2750		100/120	11	
	TMP 13	550	250	3250		120/140	13	
	TMP 7R-F	350	250	1750		60/80	7	
	TMP 9R-F	450	250	2250		80/100	9	
	TMP 11R-F	510	250	2750		100/120	11	
	TMP 13R-F	600	250	3250		120/140	13	
	TMP9R-AP	450	250	2250		80/100	9	
	TMP11R-AP	510	250	2750		100/120	11	
	TMP13R-AP	600	250	3250		120/140	13	
	TMP15R-AP	675	250	3750		140/160	15	
	TMP17R-AP	785	250	4250		160/180	17	


Accessories on demand

Pair of light and medium series depth wheels with bracket

Pair of heavy series depth wheels with bracket

MOUNTED TINE HARROWS

MEP series

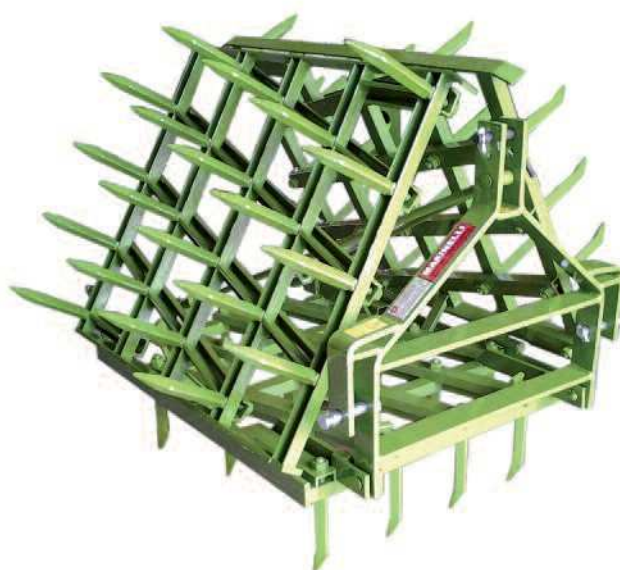

Series	Model	Weight	Work		Teeth				
		Kg. Kg.	Prof.mm. Depthmm.	Largh. mm. Width mm.	N. N.	Tipodente Teeth type			
Light	MEPL 40	182		2250	40	3			
	MEPL 50	210		2500	50	3			
	MEPL 60	230		3000	60	3			
Medium	MEPM 40	202		2000	40	4			
	MEPM 50	235		2500	50	4			
	MEPM 60	265		3000	60	4			
Heavy	MEPP 40	250		2250	40	6			
	MEPP 46	258		2380	46	6			
	MEPP 50	267		2500	50	6			
	MEPP 60	300		3000	60	6			
Super-Heavy	MEPSP 50	380		2500	50	8			
	MEPSP 60	420		3000	60	8			
Super-Heavy Hydraulic opening	MEPSP 80 IDR	620		4000	80	8			
	MEPSP 80 IDR	700		4500	90	8			

MOUNTED COIL TYPE VIBRO-CULTIVATORS

With fixed chassis



Series	Model	Weight	Work		HP	Price	Price
		Kg. Kg.	Prof.mm. Depthmm.	Largh. mm. Width mm.			
Telaio vibro nudo	VCP 160	300		1600	25/30		
Rullo frangizolle	VCP 160	300		1600	25/30		
Telaio vibro nudo	VCP 180	320		1800	30/35		
Rullo frangizolle	VCP 180	320		1800	30/35		
Telaio vibro nudo	VCP 200	340		2000	35/45		
Rullo frangizolle	VCP 200	340		2000	35/45		
Telaio vibro nudo	VCP 220	360		2250	50/60		
Rullo frangizolle	VCP 220	360		2250	50/60		
Telaio vibro nudo	VCP 250	380		2500	60/90		
Rullo frangizolle	VCP 250	380		2500	60/90		
Telaio vibro nudo	VCP 300	440		3000	90/120		
Rullo frangizolle	VCP 300	440		3000	90/120		

Accessories on demand	
Zig-zag harrow for VCP 160	
Zig-zag harrow for VCP 180	
Zig-zag harrow for VCP 200	
Zig-zag harrow for VCP 220	
Zig-zag harrow for VCP 250	
Zig-zag harrow for VCP 300	
Pair of iron depth wheels	


MOUNTED COIL TYPE VIBRO-CULTIVATORS

Hydraulic device
with roller and
wheels



Series	Model	Weight	Work		HP		Price	Price
		Kg. Kg.	Prof.mm. Depthmm.	Largh. mm. Width mm.			Single coil	Dual coil
3 sections (2 ripiegabili)	VCPI 300	420		3000	120/130			
3 sections (2 ripiegabili)	VCPI 350	480		3500	130/160			
3 sections (2 ripiegabili)	VCPI 400	530		4000	130/160			
3 sections (2 ripiegabili)	VCPI 450	580		4500	130/160			
3 sections (2 ripiegabili)	VCPI 500	650		5000	130/160			
Accessories on demand								
Pair of depth wheels								


MOUNTED MINI-VIBRO CULTIVATOR

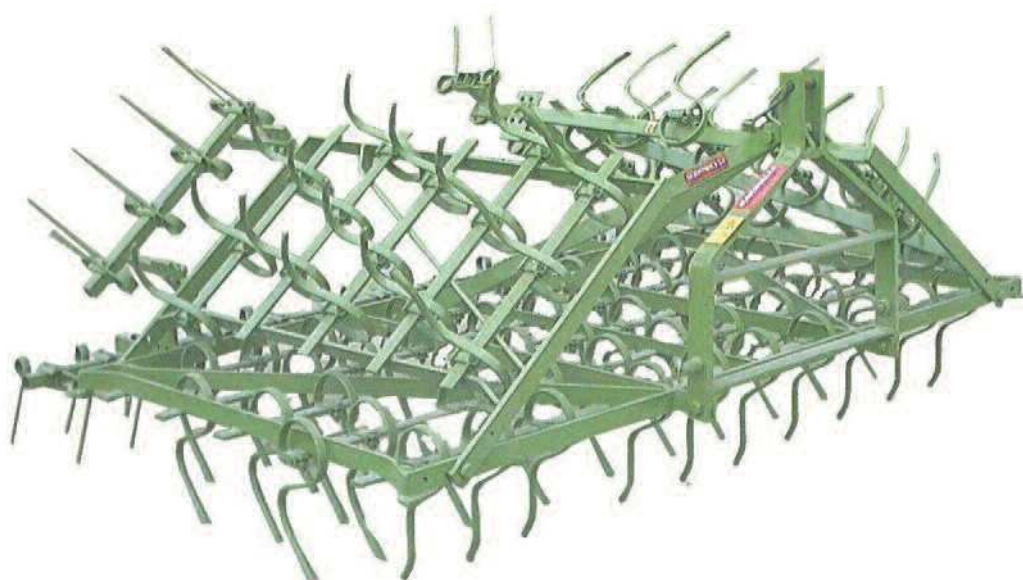

Series	Model	Weight	Work			Coils	HP	Price
		Kg. Kg.	Largh. mm. Width mm.			N. N.		
Light	MVCP 250F		2500			50	40/60	
	MVCP 350R		2500+1000			70	70/130	
	MVCP 400R		2500+1500			80	70/130	
Accessories on demand								
2500 mm rake								
3500 mm rake								
4000 mm rake								

TRAILED AND MOUNTED-TRAILED SEEDBED ROLLERS


MRLT Light Series MRLPT Light Series

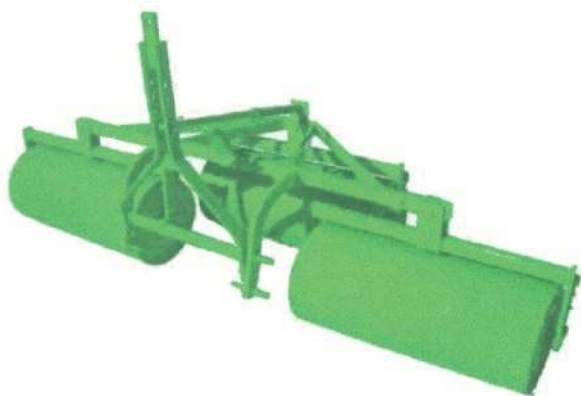

Series	Model	Weight	Weight	Work	Sections sheet			Price
		Empty kg	Full kg	Largh. mm. Width mm.	ø mm. ø mm.	N. N.		
Trailed	MRLT200	160	400	2000	400x700	3		
	MRLT230	185	550	2300	440x800	3		
	MRLT260	215	700	2600	480x900	3		
	MRLT300	270	800	3000	480x1050	3		
Mounted-Trailed	MRLPT 300	360	850	3000	480x1050	3		

MOUNTED SEEDBED ROLLERS

MRP Heavy
Series MRPH
Heavy Series
 Compactable for road transport

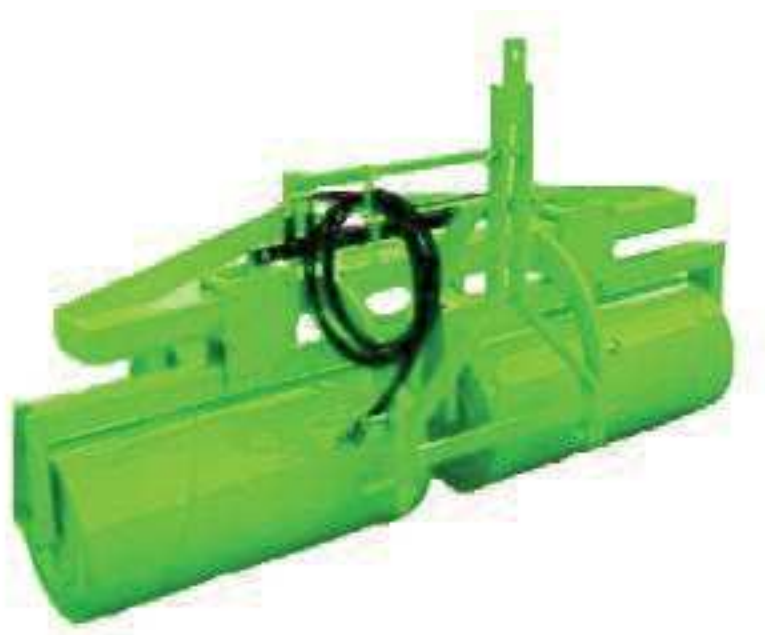

Series	Model	Weight	Weight	Work	Sections sheet		Price
		Empty kg	Full kg	Largh. mm. Width mm.	ø mm. ø mm.	N. N.	
	MRPH 300	420	910	3000	480x1050	3	
Hydraulic Mounted- trailed							

MOUNTED-TRAILED CAST IRON SEEDBED ROLLERS

MRPTG Light Series MRPHPTG Light Series



Series	Model	Weight	Work		Sections sheet				Price
		Kg. Kg.	Prof.mm. Depthmm.	Largh. mm. Width mm.	ø mm. ø mm.	N. N.			
Mounted-trailed - Notched	MRPTG 220 D40	580		2200	400x100	1			
	MRPTG 220 D48	700		2200	480x100	1			
Mounted-trailed - Cambridge	MRPTG 220 C40	630		2200	400x100	1			
	MRPTG 220 C48	780		2200	480x100	1			
Mounted-trailed - Notched	MRPHPTG 290 D40	930		2900	400x100	3			
	MRPHPTG 290 D48	1100		2900	480x100	3			
Mounted-trailed - Cambridge	MRPHPTG 290 C40	1000		2900	400x100	3			
	MRPHPTG 290 C48	1200		2900	480x100	3			

TRAILED CAST IRON SEEDBED ROLLERS

MRTH 290 series

MRSN 460 series

MRTH 520 series




Series	Model	Weight	Work		Sections sheet				Price
			Kg. Kg.	Prof. mm. Depth mm.	Largh. mm. Width mm.	ø mm. ø mm.			
Trailed notched long. transp.	MRTH 290 D40	880		2900	400x100				
	MRTH 290 D48	1030		2900	480x100				
Trailed Cambridge long. transp.	MRTH 290 C40	950		2900	400x100				
	MRTH 290 C48	1100		2900	480x100				
Trailed notched	MRSN 460 D40	1650		4600	400x100				
	MRSN 460 D48	1900		4600	480x100				
Trailed Cambridge	MRSN 460 C40	1750		4600	400x100				
	MRSN 460 C48	2050		4600	480x100				
Trailed notched	MRSN 520 D40	1920		5200	400x100				
	MRSN 520 D48	2150		5200	480x100				
Trailed Cambridge	MRSN 520 C40	2020		5200	400x100				
	MRSN 520 C48	2300		5200	480x100				
Trailed in sheet steel	MRSN 460	1050		4600	400x100				
	MRSN 520	1050		5200	480x100				

Licensing for road transport (models MRSN 520 and MRTH 290 only)

net

CAST IRON SEEDBED ROLLERS TRAILED - NOTCHED

MRTH 510
series MRTH
650S series

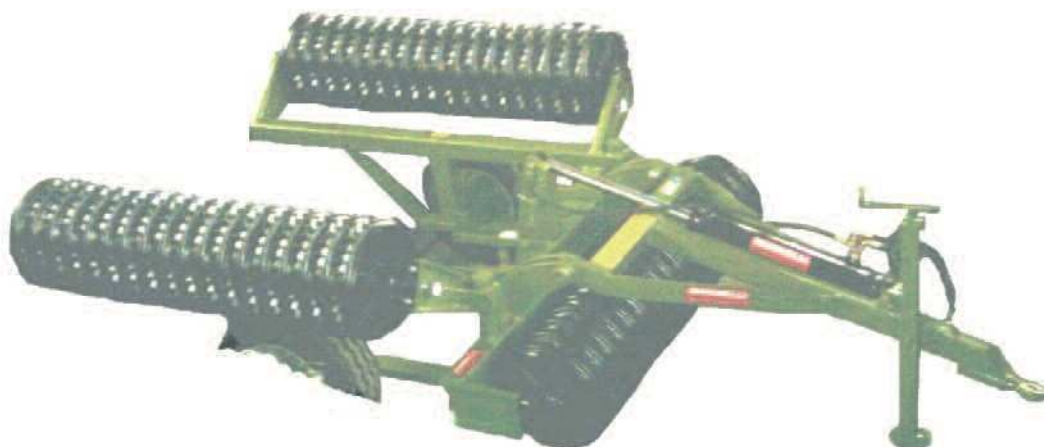

Series	Model	Weight	Work		Sections sheet				Price
		Kg. Kg.	Prof.mm. Depthmm.	Largh. mm. Width mm.	ø mm. ø mm.				
Trailed notched	MRTH 650 S D48	2550		6500	480x100				
Trailed Cambridge	MRTH 650 S C40	2750		6500	480x100				

Licensing for road transport (models MRSN 520 and MRTH 290 only)

net

UNIVERSAL IMPLEMENT TRAILERS

For trailing of Grubbers, Tillers,
Chisel Ploughs, Zig-Zag Harrows
and Vibro-Cultivators



Series	Model	Weight					HP	Price
		Kg. Kg.						
	CM50hydraulic RF	240					50/65	
	CM60hydraulic RF	290					65/80	
	CM70hydraulic RF	390					80/110	
	CM50hydraulic RG	260					50/65	
	CM60hydraulic RG	310					65/80	
	CM70hydraulic RG	410					80/110	

TRAILERS FOR RIPPERS



Series	Model	Weight					HP	Price
		Kg. Kg.						
	CMR 60 Iron wheels	320					60/80	
	CMR 70 Iron wheels	370					90/110	
	CMR 80 Iron wheels	430					120/150	
	CMR 60 Rubber-tyred wheels	300					60/80	
	CMR 70 Rubber-tyred wheels	350					90/110	
	CMR 80 Rubber-tyred wheels	400					120/150	

MOUNTED LOADER

With 3-point hitch Tipping



Series	Model	Weight	Internal dimensions		Capacity	Price
		Kg. Kg.	LxPxHmm. WxDxH mm.		Kg. Kg.	
	CMR 120	118	1200x600x400		300	
	CMR 140	134	1400x800x400		400	
	CMR 160	154	1600x800x400		450	
	CMR 180	174	1800x800x400		500	
	CMR 200	210	2000x800x400		600	

CRANE

With 3-point hitch Tipping



Series	Model	Weight	Dimensioni		Capacity	Price
		Kg. Kg.	mm. mm.			
	GPR Marinelli	320	3500		500	

GRADER AND SUPER GRADER




Series	Model	Weight	Dimensions				HP	Price
		Kg. Kg.	Largh. mm. Width mm.	Altezzamm. Heightmm.				
Light	LLM 100	113	1000	400			25/35	
	LLM 120	123	1200	400			35/40	
	LLM 140	130	1400	400			40/45	
	LLM 160	163	1600	400			45/50	
Medium	LLM 180	185	1800	450			35/50	
	LLM 200	205	2000	450			50/70	
	LLM 220	220	2200	450			70/90	
	LLM 250	260	2500	450			90/110	
Heavy	LLM 160	222	1600	550			45/55	
	LLM 180	243	1800	550			55/65	
	LLM 200	264	2000	550			55/75	
	LLM 220	285	2200	550			75/95	
	LLM 250	320	2500	550			95/120	
	LLM 300	370	3000	550			120/140	
Super-Heavy	SLLM 220	400	2200	750				
	SLLM 250	450	2500	750				

Accessories on demand

Hydraulic sideshift for all models

ROCK BUCKET

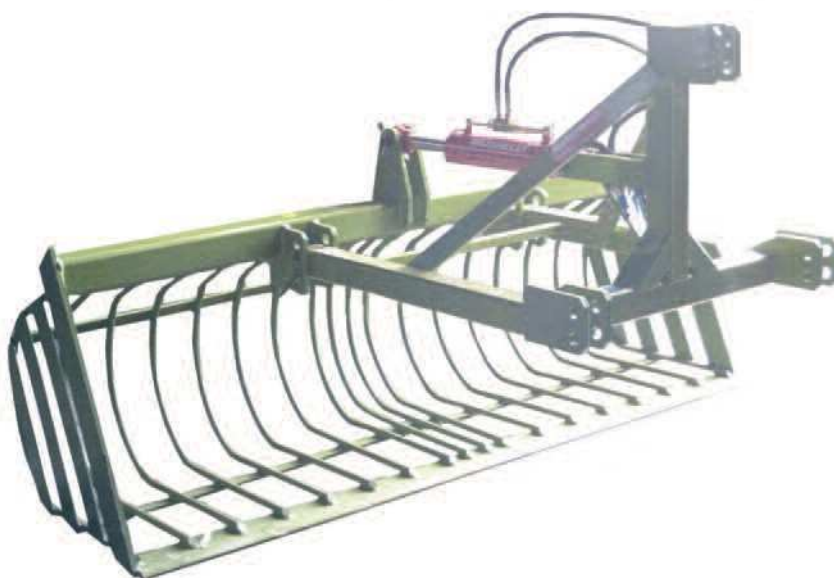

Series	Model	Weight						Price
		Kg. Kg.						
	CS 140	270						
	CS 160	295						
	CS 180	320						
	CS 200	350						
	CS 1230	380						

REAR ROUND BALE LOADER

With folding forks



Series	Model	Weight	Dimensions					Price
		Kg. Kg.	Largh. mm. Width mm.	Altezzamm. Height mm.				
	Forca 100		1000	1400				
	Forca 125		1250	1400				
	Forca 150		1500	1400				

ROTARY DITCHER

Complete with driveshaft



Series	Model	Weight	Working width				Price
		Kg. Kg.	mm. mm.				
	SRM1 (spostam. normale)	105	300				
	SRM 1DR (spostam. idraulico)	130	300				

MOUNTED TIPPING EARTH LOADERS



Release device	Model	Weight	Dimensions			Capacity	Price
		Kg. Kg.	Largh. mm. Width mm.	Altezzamm. Heightmm.		Kg. Kg.	
Mechanical	PCT 120 Media	185	1200	800		320	
	PCT 140 Media	205	1400	800		400	
	PCT 160 Media	220	1600	800		450	
	PCT 180 Media	275	1800	800		500	
	PCT 200 Media	300	2000	800		550	
Mechanical	PCT 140 Pesante	275	1400	900		470	
	PCT 160 Pesante	295	1600	900		520	
	PCT 180 Pesante	315	1800	900		570	
	PCT 200 Pesante	340	2000	900		620	
	PCT 240 Pesante	370	2400	900		670	
Hydraulic	PCT 140 Pesante	275	1400	900		470	
	PCT 160 Pesante	295	1600	900		520	
	PCT 180 Pesante	315	1800	900		570	
	PCT 200 Pesante	340	2000	900		620	
	PCT 240 Pesante	370	2400	900		670	

RIPPERS

Mini Series

With adjustable shanks



Series	Model	Weight	Work					Price
			Kg. Kg.	Prof. mm. Depth mm.	Largh. mm. Width mm.			
Mini	RMML/2 (monotrave)	130		25	120			
	RMML/3 (monotrave)	150		25	140			
	RMMM/2 (monotrave)	165		30	160			
	RMML/5 (bitrave)	200		30	180			

Accessories on demand							
Pair of depth wheels							
Pair of wheel carrier brackets							

800 LITRE DOUBLE ROTOR MANURE SPREADER

Rotor plates and vanes in stainless steel Painted frame and hopper Complete with debris screen Complete with driveshaft



Series	Model	Weight							Price
		Kg. Kg.							
	SP800 Meccanico								
	SP800 Idraulico								

FIREWOOD BUNDLER



Series	Model	Weight							Price
		Kg. Kg.							
	FM 100	330							

Accessories on demand									
2-way spool valve for chain cylinder									
Sidewall									


ADJUSTABLE CHISEL PLOUGH

DM series for vineyards



Series	Model	Weight	Work		HP		Tines	Price
			Kg. Kg.	Prof.mm. Depthmm.	Largh. mm. Width mm.	Cingoli Track	Ruote Wheels	
	DM 14	250	500	1400	50/60	40/60		2
	DM 16	260	500	1600	50/60	40/60		2
	DM 18	270	500	1800	50/70	50/70		2
	DM 20	285	500	2000	70/95	60/70		2

Accessories on demand							
Pair of depth wheels, small type							
Hydraulic Cambridge roller for DM 14 and DM 16							
Hydraulic Cambridge roller for DM 18 and DM 20							

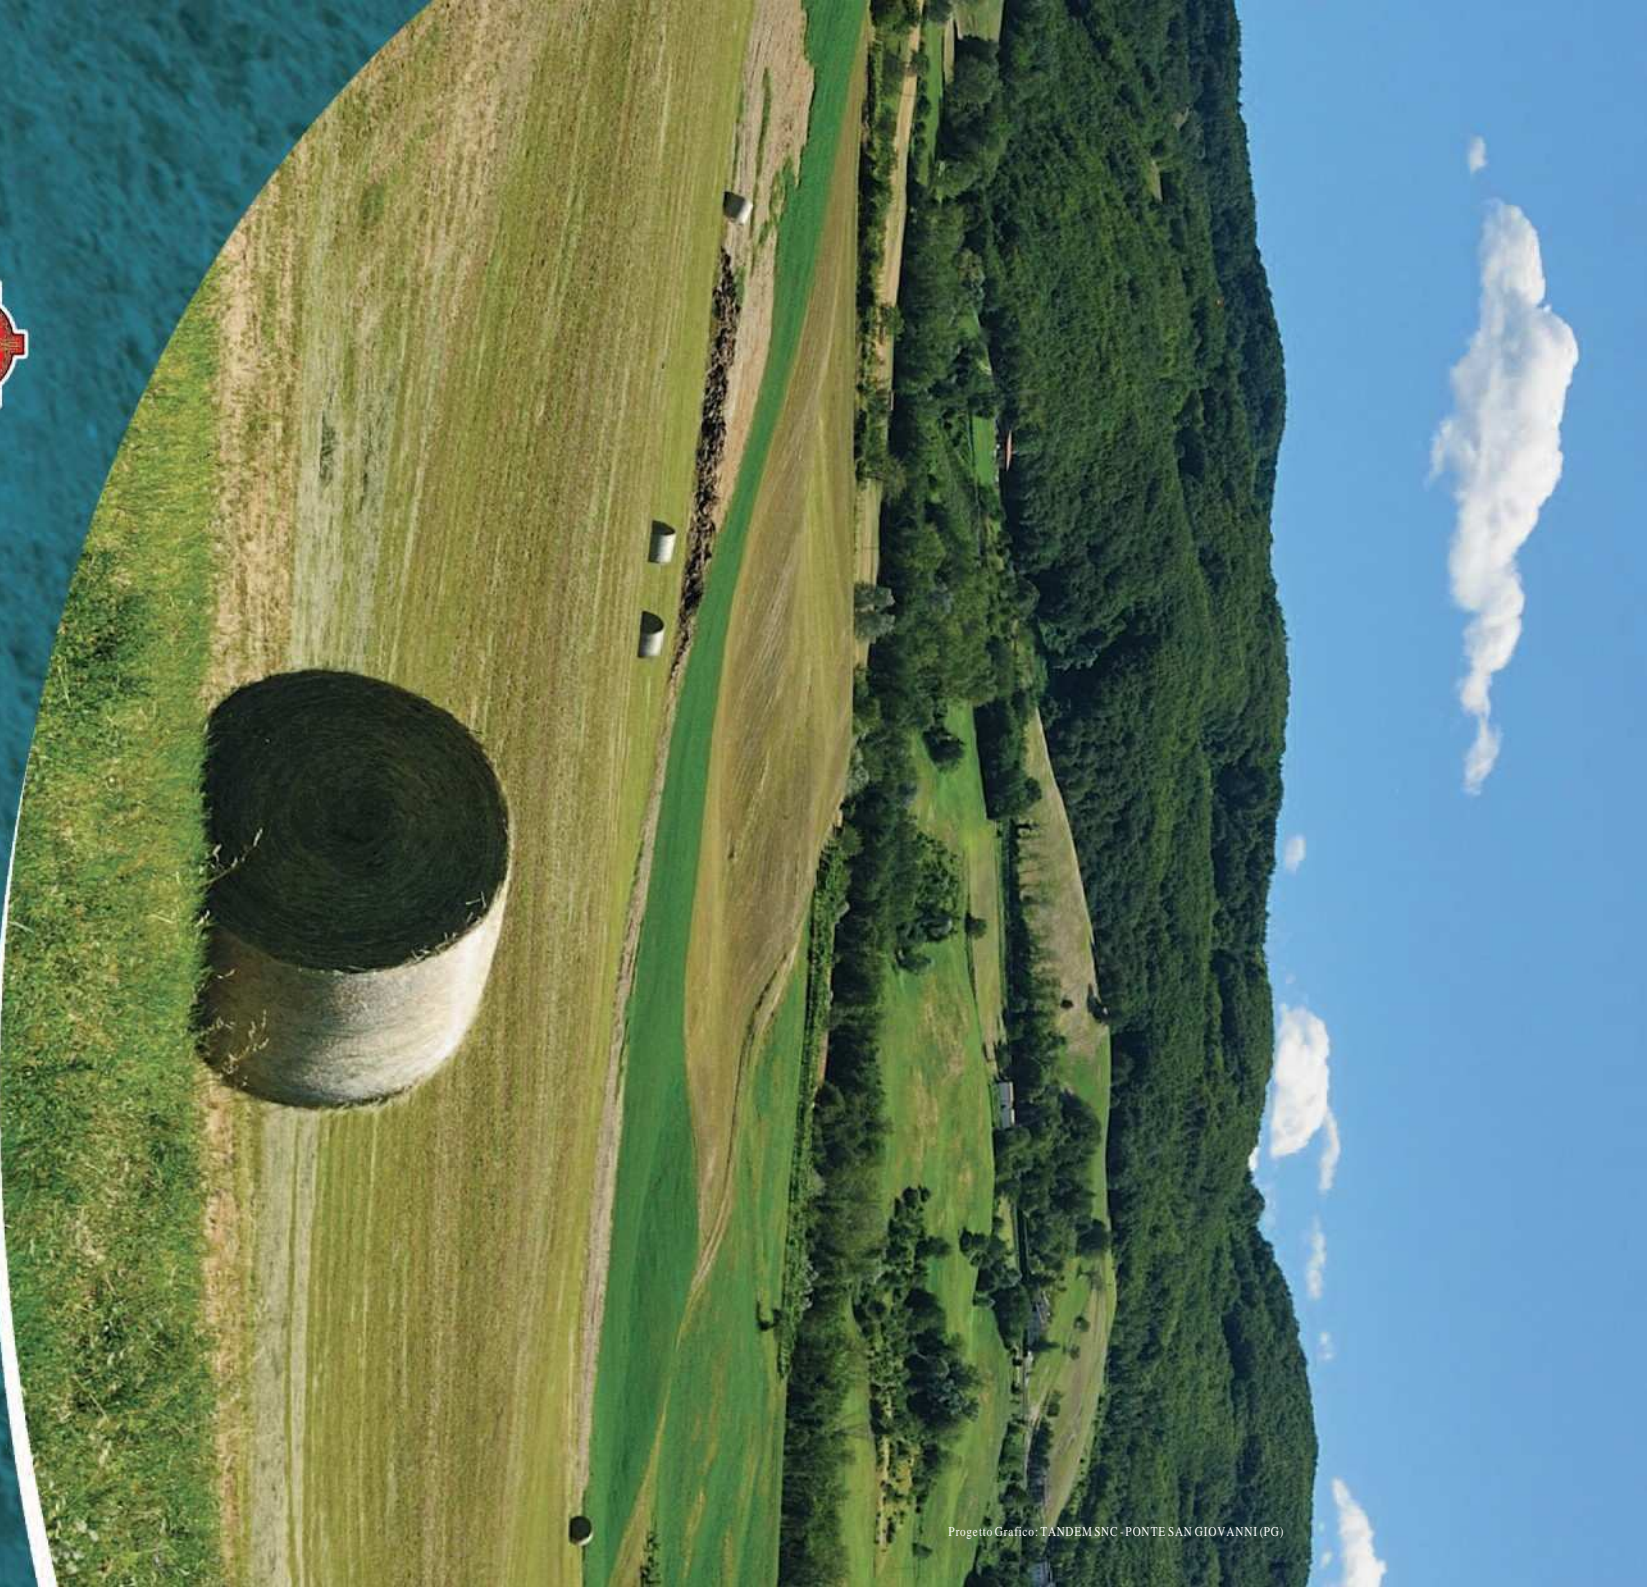

MARINELLI

Costituzione: Macchine Agricole
since 1927

F.lli MARINELLI s.r.l.

Loc. Ponte Romano, 11

06028 Sigillo (PERUGIA) ITALIA

Tel. e Fax +39. 075.9177453

commerciale@marinellimacchineagricole.it

macchineagricolemarinelli@gmail.com

www.marinellimacchineagricole.it