

1. Description

1.1. Project

Project Name	checkio
Board Name	NUCLEO-F042K6
Generated with:	STM32CubeMX 4.27.0
Date	11/29/2018

1.2. MCU


MCU Series	STM32F0
MCU Line	STM32F0x2
MCU name	STM32F042K6Tx
MCU Package	LQFP32
MCU Pin number	32

3. Pins Configuration

Pin Number LQFP32	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VDD	Power		
2	PF0-OSC_IN	I/O	RCC_OSC_IN	MCO
3	PF1-OSC_OUT	I/O	I2C1_SCL	
4	NRST	Reset		
5	VDDA	Power		
8	PA2	I/O	USART2_TX	VCP_TX
16	VSS	Power		
17	VDDIO2	Power		
19	PA9	I/O	GPIO_EXTI9	
20	PA10	I/O	I2C1_SDA	
22	PA12 *	I/O	GPIO_Input	D2
23	PA13	I/O	SYS_SWDIO	SWDIO
24	PA14	I/O	SYS_SWCLK	SWCLK
25	PA15	I/O	USART2_RX	VCP_RX
26	PB3 *	I/O	GPIO_Output	LD3
29	PB6	I/O	USART1_TX	
30	PB7	I/O	USART1_RX	
32	VSSA	Power		

* The pin is affected with an I/O function

4. Clock Tree Configuration

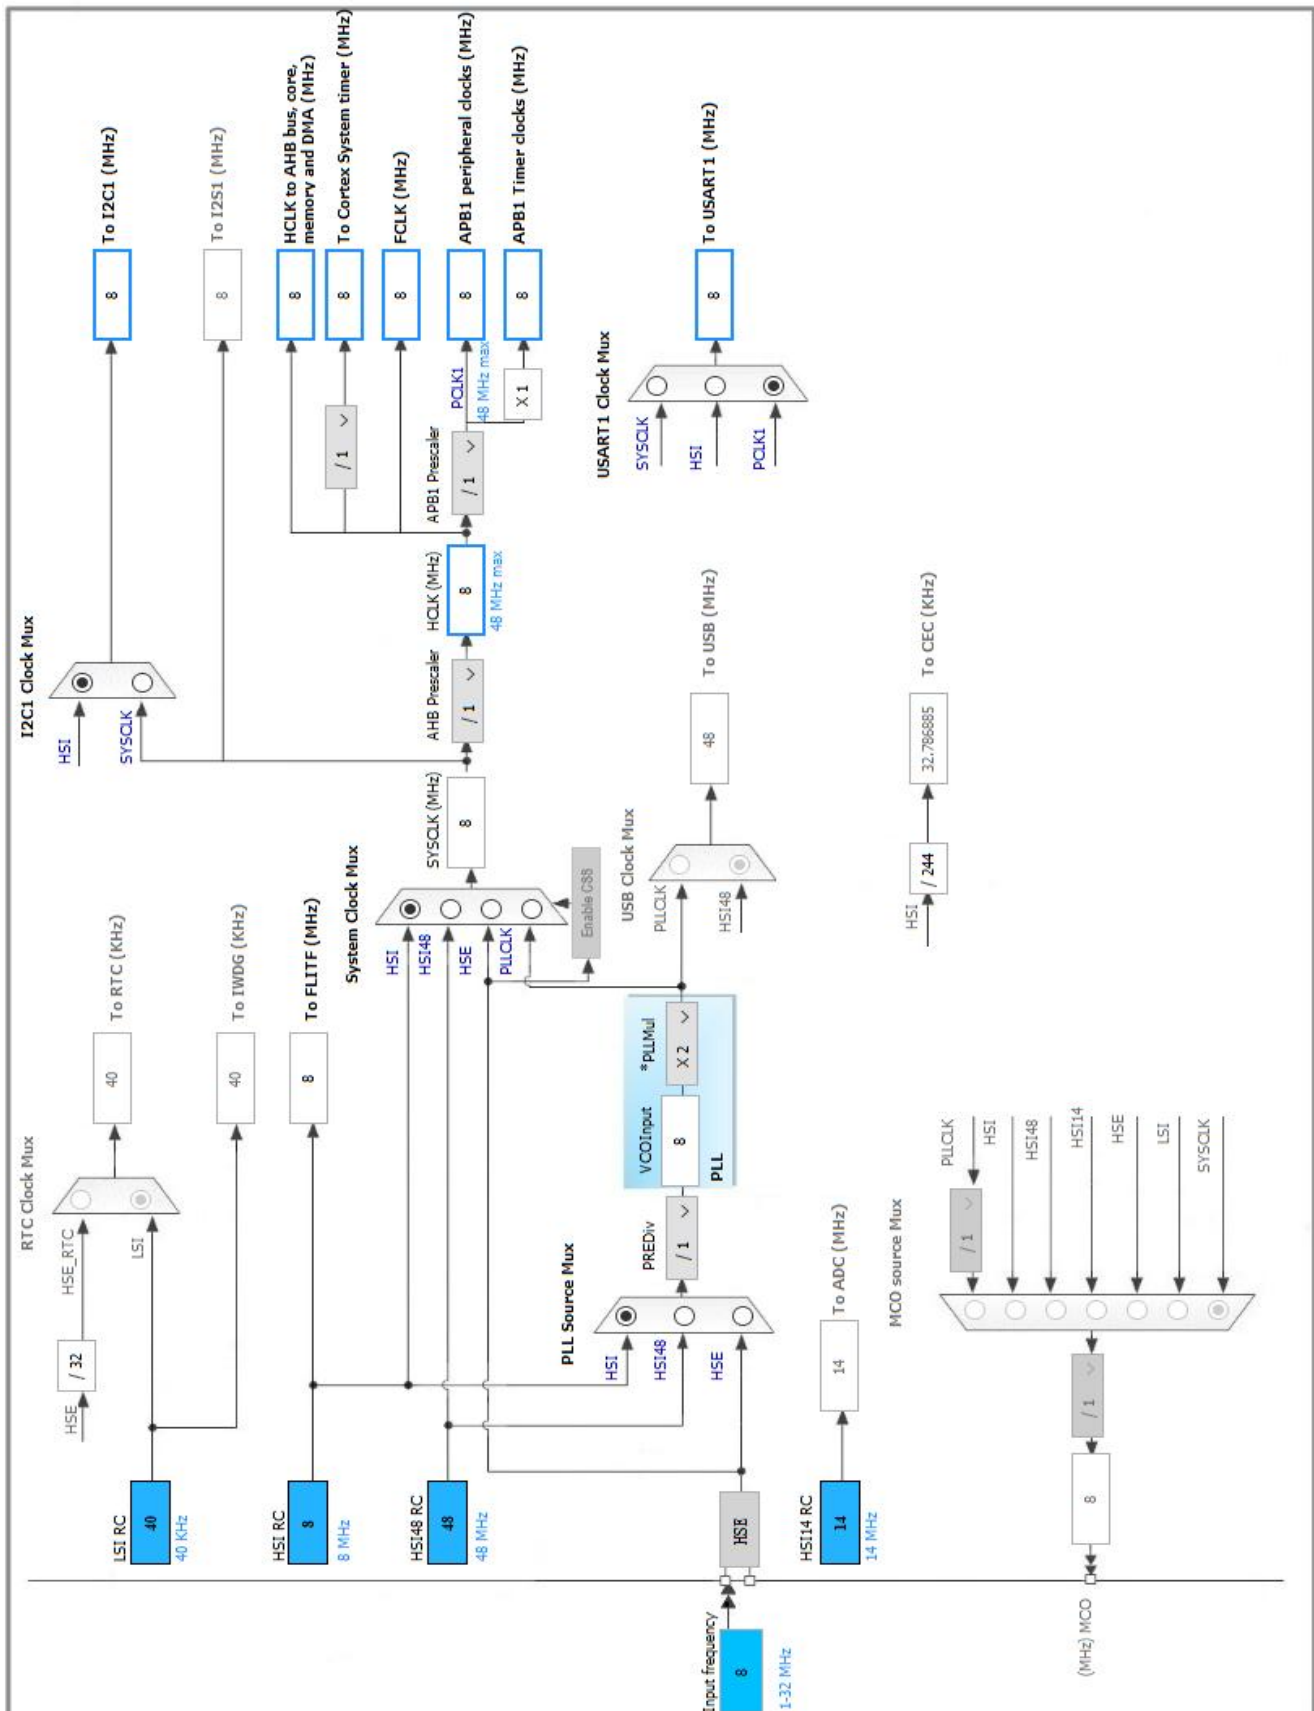

5. IPs and Middleware Configuration

5.1. I2C1

I2C: I2C

5.1.1. Parameter Settings:

Timing configuration:

I2C Speed Mode	Fast Mode *
I2C Speed Frequency (KHz)	400
Rise Time (ns)	0
Fall Time (ns)	0
Coefficient of Digital Filter	0
Analog Filter	Enabled
Timing	0x0000020B *

Slave Features:

Clock No Stretch Mode	Disabled
General Call Address Detection	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0x47 *

5.2. RCC

High Speed Clock (HSE): BYPASS Clock Source

5.2.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Prefetch Buffer	Enabled
Flash Latency(WS)	0 WS (1 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

5.3. SYS

mode: Debug Serial Wire
Timebase Source: SysTick

5.4. USART1

Mode: Asynchronous

5.4.1. Parameter Settings:

Basic Parameters:

Baud Rate	9600 *
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples
Single Sample	Disable

Advanced Features:

Auto Baudrate	Disable
TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX Pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable
MSB First	Disable

5.5. USART2

Mode: Asynchronous

5.5.1. Parameter Settings:

Basic Parameters:

Baud Rate	9600 *
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

Single Sample Disable

Advanced Features:

TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX Pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable
MSB First	Disable

5.6. FREERTOS

mode: Enabled

5.6.1. Config parameters:

Versions:

FreeRTOS version	9.0.0
CMSIS-RTOS version	1.02

Kernel settings:

USE_PREEMPTION	Enabled
CPU_CLOCK_HZ	SystemCoreClock
TICK_RATE_HZ	1000
MAX_PRIORITIES	7
MINIMAL_STACK_SIZE	64 *
MAX_TASK_NAME_LEN	16
USE_16_BIT_TICKS	Disabled
IDLE_SHOULD_YIELD	Enabled
USE_MUTEXES	Enabled
USE_RECURSIVE_MUTEXES	Disabled
USE_COUNTING_SEMAPHORES	Disabled
QUEUE_REGISTRY_SIZE	8
USE_APPLICATION_TASK_TAG	Disabled
ENABLE_BACKWARD_COMPATIBILITY	Enabled
USE_PORT_OPTIMISED_TASK_SELECTION	Disabled
USE_TICKLESS_IDLE	Disabled
USE_TASK_NOTIFICATIONS	Enabled

Memory management settings:

Memory Allocation	Dynamic
TOTAL_HEAP_SIZE	3072
Memory Management scheme	heap_4

Hook function related definitions:

USE_IDLE_HOOK	Disabled
USE_TICK_HOOK	Disabled
USE_MALLOC_FAILED_HOOK	Disabled
USE_DAEMON_TASK_STARTUP_HOOK	Disabled
CHECK_FOR_STACK_OVERFLOW	Disabled

Run time and task stats gathering related definitions:

GENERATE_RUN_TIME_STATS	Disabled
USE_TRACE_FACILITY	Disabled
USE_STATS_FORMATTING_FUNCTIONS	Disabled

Co-routine related definitions:

USE_CO_ROUTINES	Disabled
MAX_CO_ROUTINE_PRIORITIES	2

Software timer definitions:

USE_TIMERS	Disabled
------------	----------

Interrupt nesting behaviour configuration:

LIBRARY_LOWEST_INTERRUPT_PRIORITY	3
LIBRARY_MAX_SYSCALL_INTERRUPT_PRIORITY	3

5.6.2. Include parameters:

Include definitions:

vTaskPrioritySet	Enabled
uxTaskPriorityGet	Enabled
vTaskDelete	Enabled
vTaskCleanUpResources	Disabled
vTaskSuspend	Enabled
vTaskDelayUntil	Disabled
vTaskDelay	Enabled
xTaskGetSchedulerState	Enabled
xTaskResumeFromISR	Enabled
xQueueGetMutexHolder	Disabled
xSemaphoreGetMutexHolder	Disabled
pcTaskGetTaskName	Disabled
uxTaskGetStackHighWaterMark	Disabled
xTaskGetCurrentTaskHandle	Disabled
eTaskGetState	Disabled
xEventGroupSetBitFromISR	Disabled
xTimerPendFunctionCall	Disabled
xTaskAbortDelay	Disabled
xTaskGetHandle	Disabled

*** User modified value**

6. System Configuration

6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
I2C1	PF1-OSC_OUT	I2C1_SCL	Alternate Function Open Drain	Pull-up	High *	
	PA10	I2C1_SDA	Alternate Function Open Drain	Pull-up	High *	
RCC	PF0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	MCO
SYS	PA13	SYS_SWDIO	n/a	n/a	n/a	SWDIO
	PA14	SYS_SWCLK	n/a	n/a	n/a	SWCLK
USART1	PB6	USART1_TX	Alternate Function Push Pull	No pull-up and no pull-down	High *	
	PB7	USART1_RX	Alternate Function Push Pull	No pull-up and no pull-down	High *	
USART2	PA2	USART2_TX	Alternate Function Push Pull	No pull-up and no pull-down	High *	VCP_TX
	PA15	USART2_RX	Alternate Function Push Pull	No pull-up and no pull-down	High *	VCP_RX
GPIO	PA9	GPIO_EXTI9	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	
	PA12	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	D2
	PB3	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD3

6.2. DMA configuration

DMA request	Stream	Direction	Priority
USART2_RX	DMA1_Channel5	Peripheral To Memory	Low
USART2_TX	DMA1_Channel4	Memory To Peripheral	Low

USART2_RX: DMA1_Channel5 DMA request Settings:

Mode: Normal
Peripheral Increment: Disable
Memory Increment: **Enable ***
Peripheral Data Width: Byte
Memory Data Width: Byte

USART2_TX: DMA1_Channel4 DMA request Settings:

Mode: Normal
Peripheral Increment: Disable
Memory Increment: **Enable ***
Peripheral Data Width: Byte
Memory Data Width: Byte

6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
System service call via SWI instruction	true	0	0
Pendable request for system service	true	3	0
System tick timer	true	3	0
EXTI line 4 to 15 interrupts	true	3	0
DMA1 channel 4 and 5 interrupts	true	3	0
I2C1 event global interrupt / I2C1 wake-up interrupt through EXTI line 23	true	3	0
USART1 global interrupt / USART1 wake-up interrupt through EXTI line 25	true	3	0
USART2 global interrupt	true	3	0
PVD and VDDIO2 supply comparator interrupts through EXTI lines 16 and 31	unused		
Flash global interrupt	unused		
RCC and CRS global interrupts	unused		

* User modified value

7. Power Consumption Calculator report

7.1. Microcontroller Selection

Series	STM32F0
Line	STM32F0x2
MCU	STM32F042K6Tx
Datasheet	025832_Rev5

7.2. Parameter Selection

Temperature	25
Vdd	3.6

8. Software Project

8.1. Project Settings

Name	Value
Project Name	checkio
Project Folder	D:\Tobias\download\P63N293Ru2-UART_IRQHandler_NUCLEO-F042K6-
Toolchain / IDE	MDK-ARM V5
Firmware Package Name and Version	STM32Cube FW_F0 V1.9.0

8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No

9. Software Pack Report