


coarse 891 codes / 9.80 bits + fine 1,225 codes / 10.26 bits = 20.058 bits per bar, both panels ($\lambda = 3$ on the micro block, right panel only)

original — one contextual encoder feeds both halves

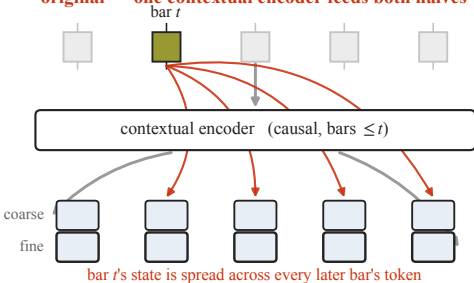


$\text{sign}(s_t)$ recoverable from bar t 's own token

0.5135

chance 0.50

re-specified — the fine half is per-bar

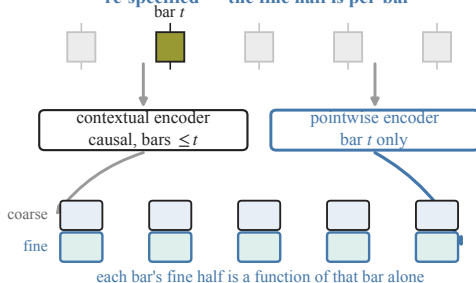

$\text{sign}(s_t)$ recoverable from bar t 's own token

0.9047

gate 0.90

Same fixture, same budget, same 1.151-nat signal planted in the microstructure channel:

$\Delta \text{val} +0.0134$ nats — not recovered

$\Delta \text{val} -1.3381$ nats — recovered