


A 30 mm custom pinch head

One voice coil · fixed lower blade · flexure-guided upper finger

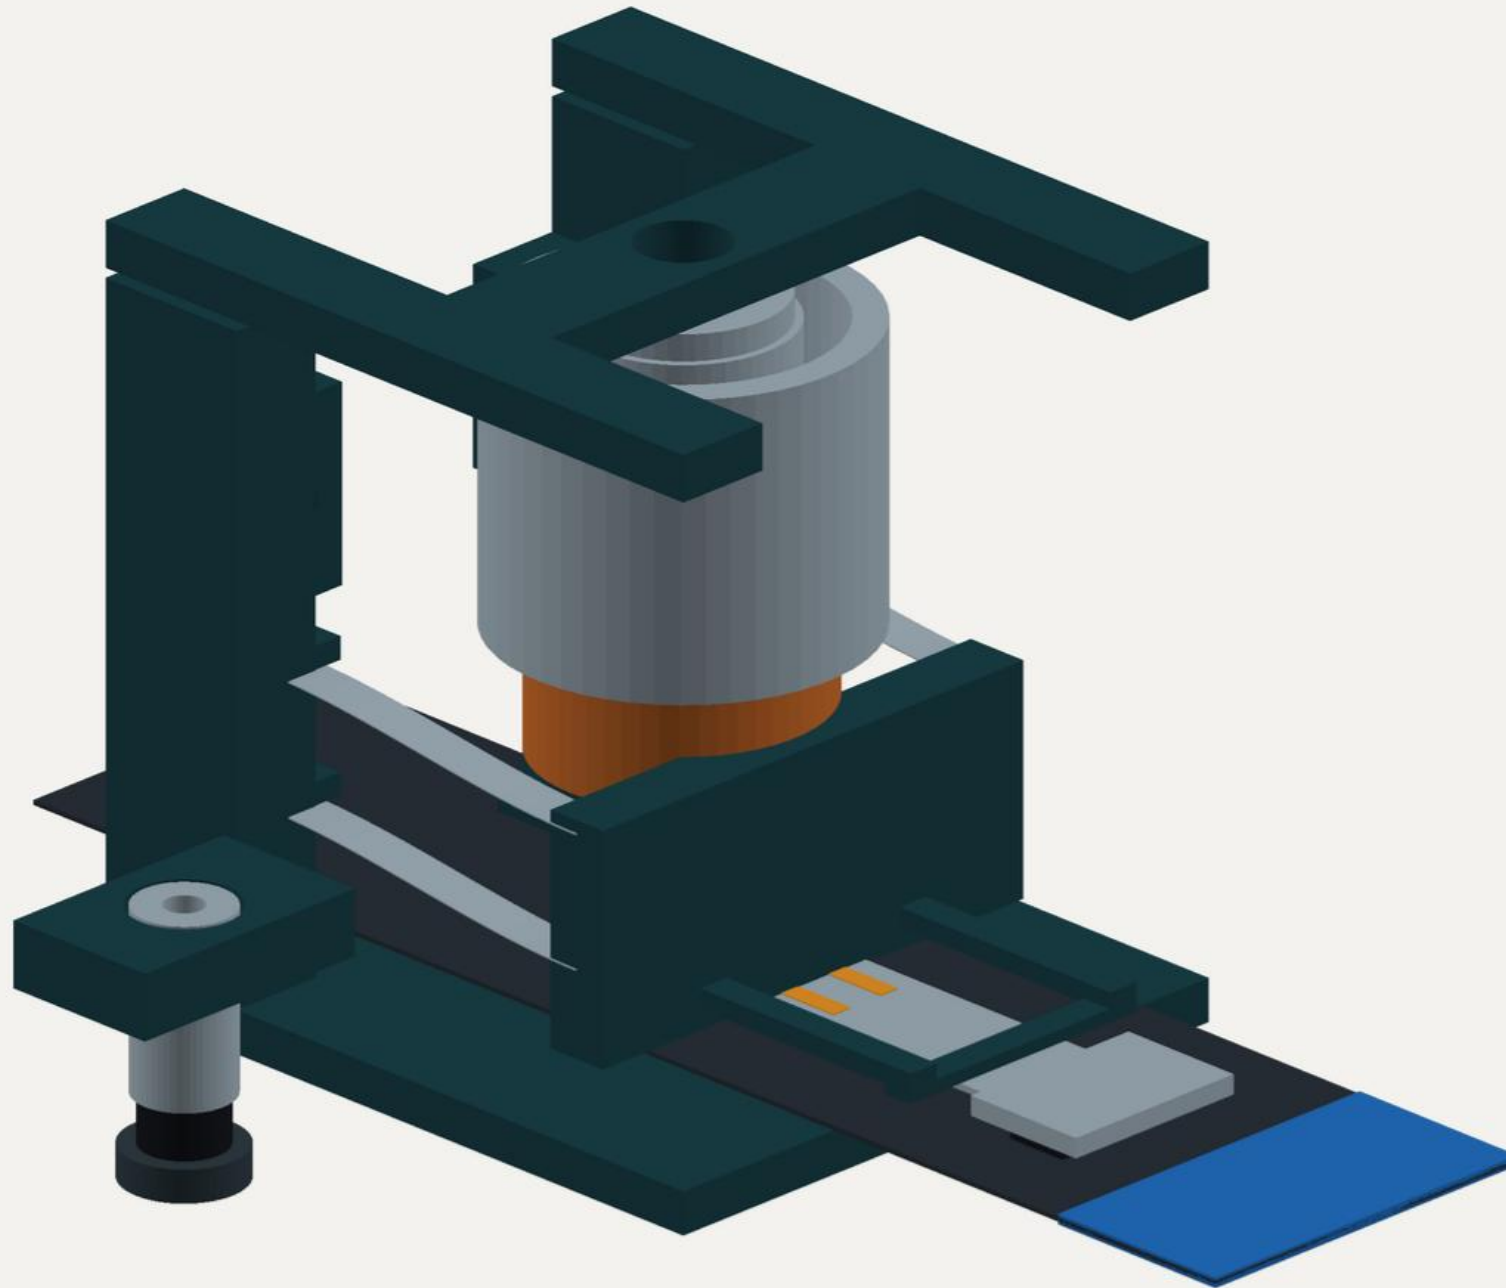

30 × 28 × 24.7 mm

Including fingers and pickup · main body 22 × 20 × 23 mm · adapter and leads excluded

Actual CAD render. Concept only: no force, fatigue, seal or insertion validation. FR3 adapter excluded.

01 11.1 mm voice coil

H2W candidate; envelope model.
Current driver stays off the wrist.

02 Steel flexure guide

Four 40 µm leaves.
No screw or sliding jaw guide.

03 Force-sensing finger


Bonded strain-gauge reserve.
Separate compliant contact pad.

04 Separate suction tip

Pickup → passive fixture → pinch.
No bulky handoff slide on the tool.


THE SAME SCALE AS THE PI ZERO 2 W

Clear end for inspection; grip the insulated body 8.5-10.5 mm behind the leading edge.

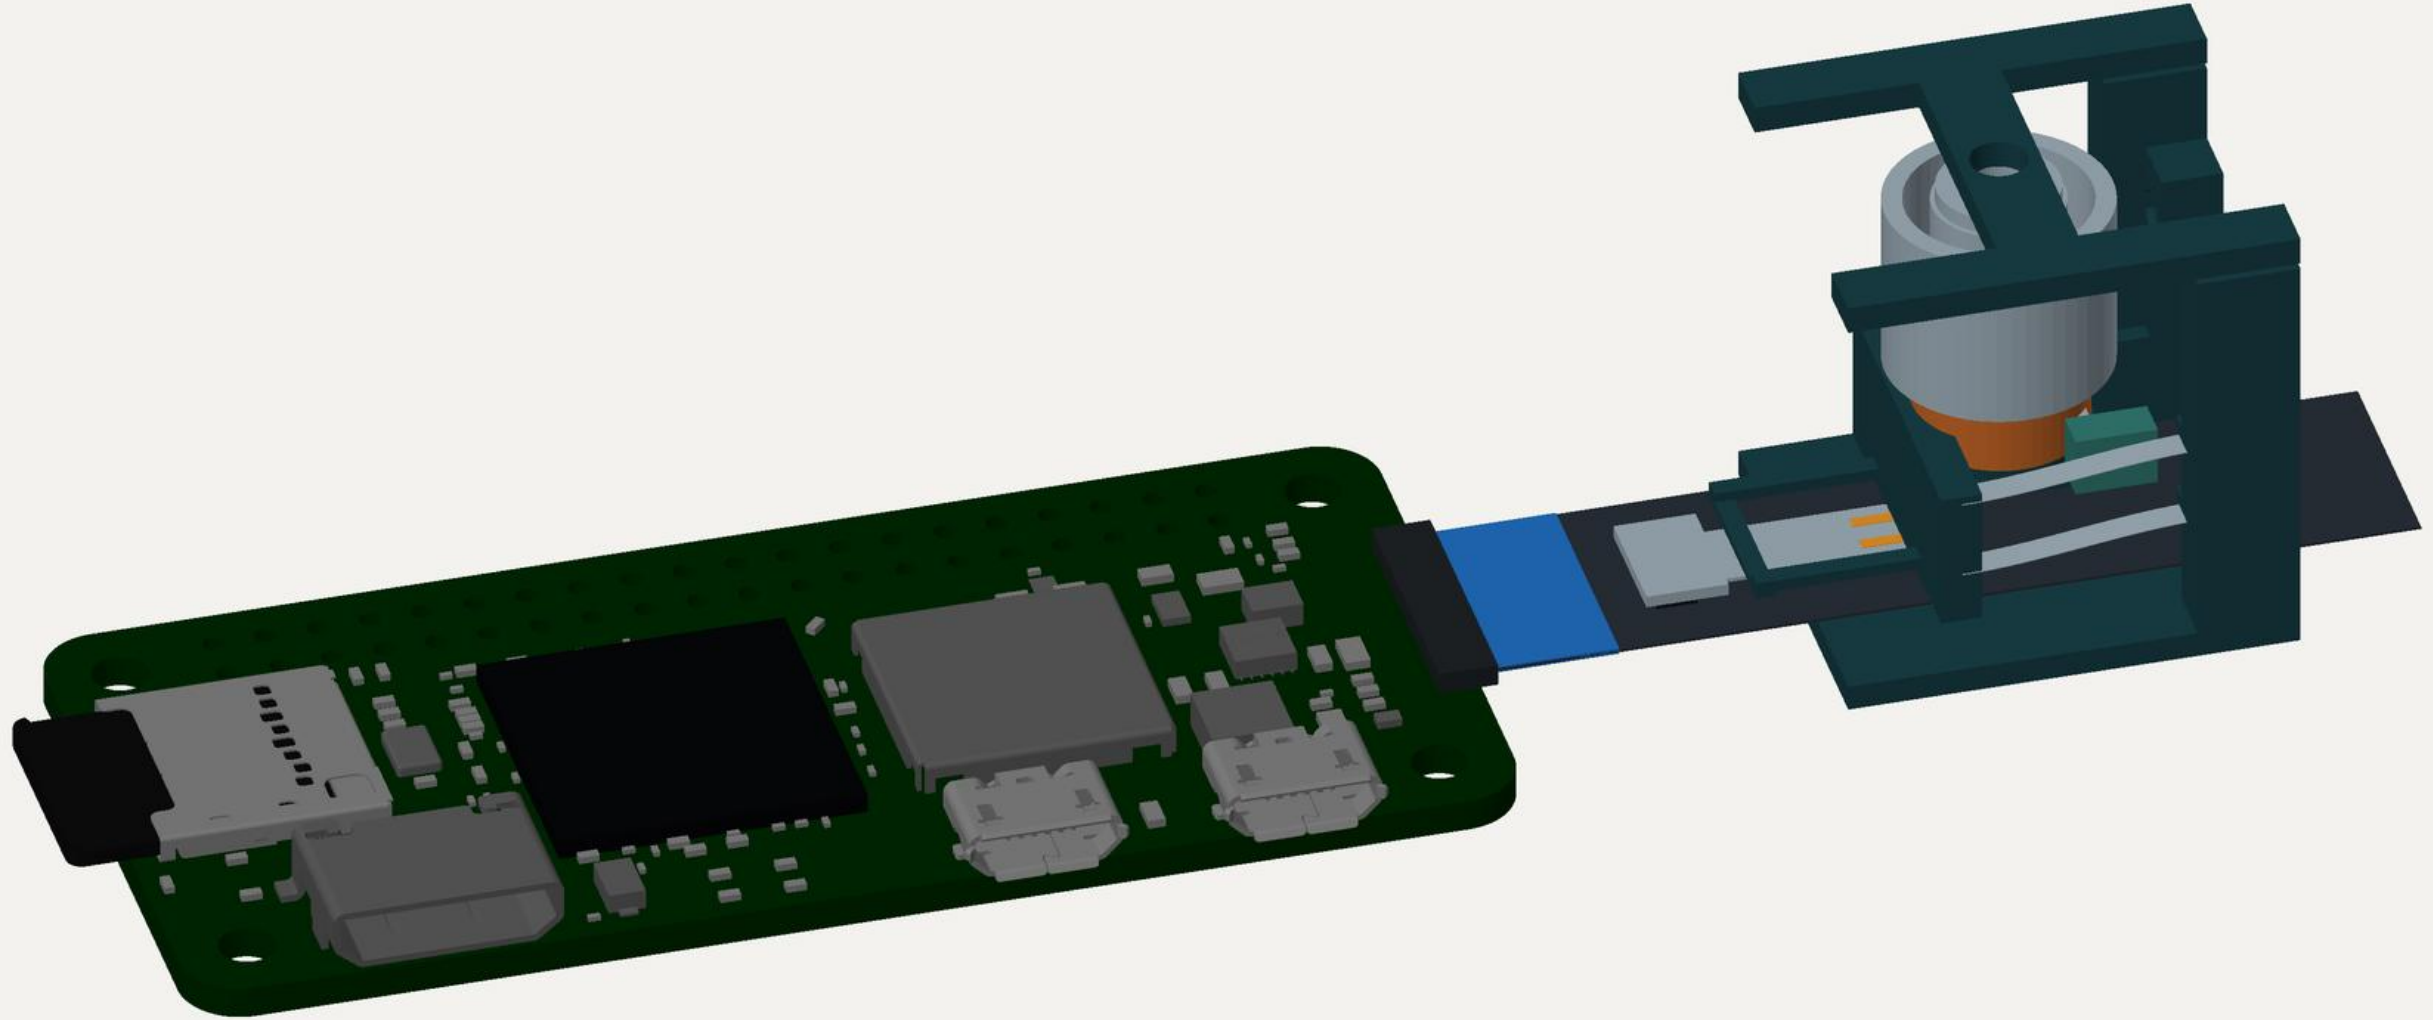


Board: community CAD. Cable tip at mouth for scale review only. No contact simulation or successful insertion implied.

OPEN / 1.20 mm pad gap

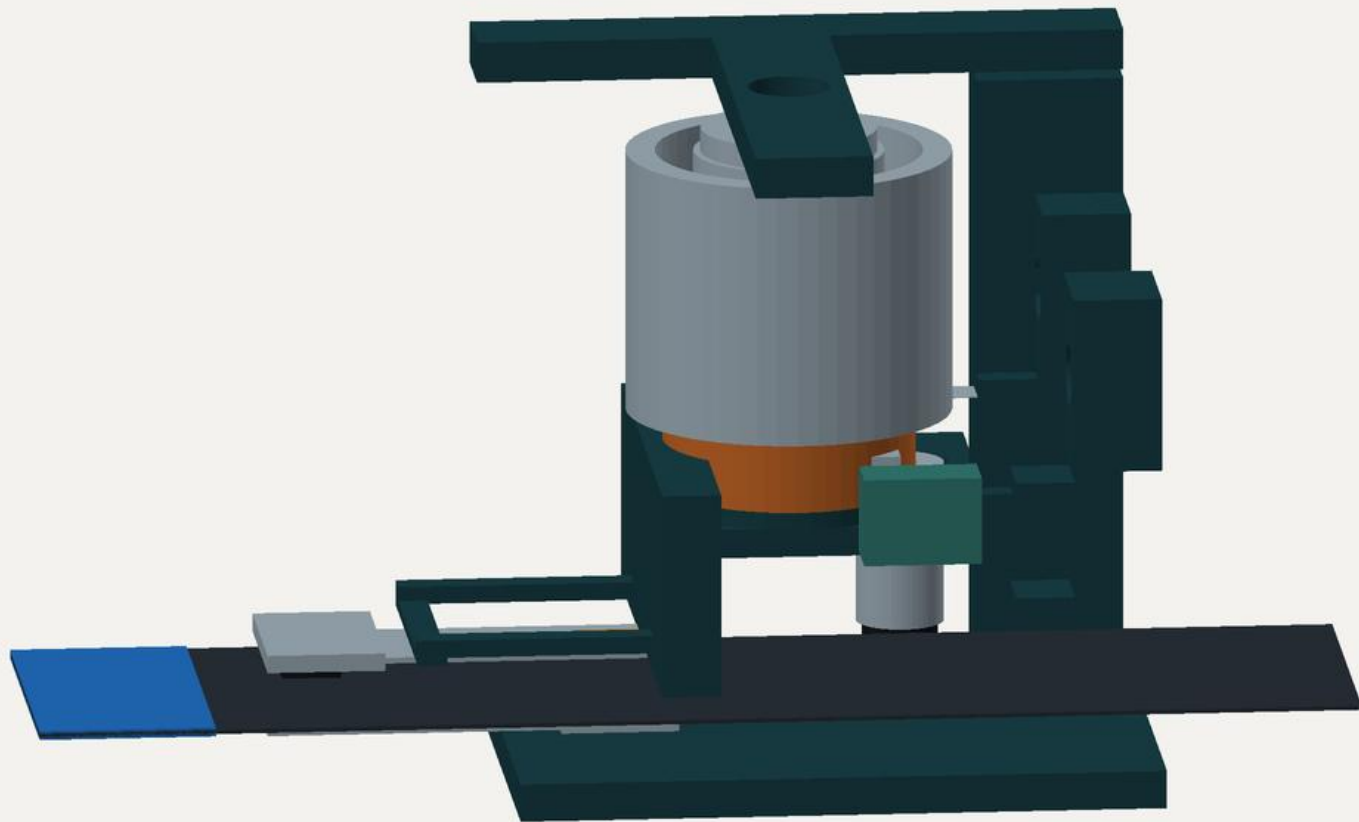


TOUCH / 0.14 mm body coupon

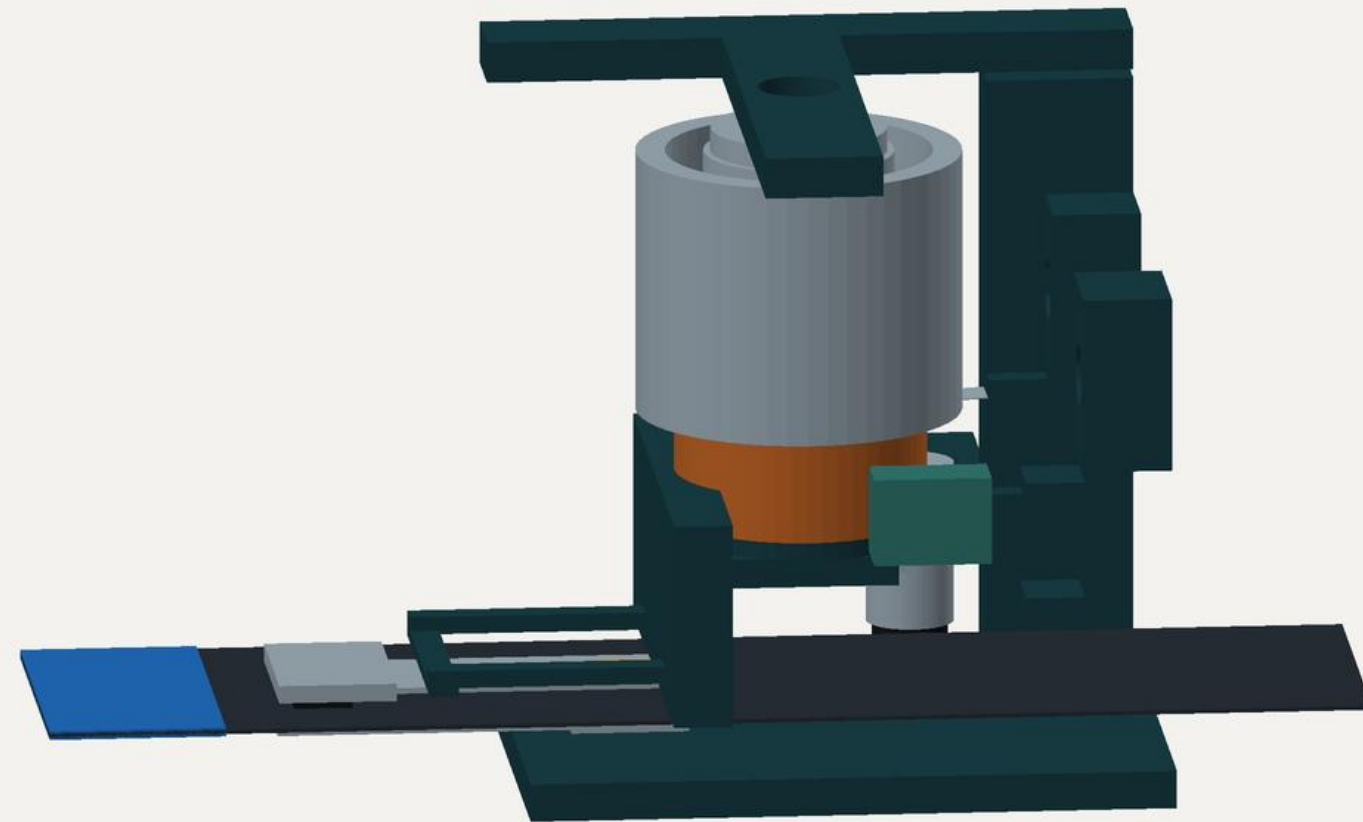

Near-side rails and two guide leaves omitted in this cutaway. Jaw movement is prescribed; loaded sensing-leaf bending is not shown.

Envelope dimensions / concept 01

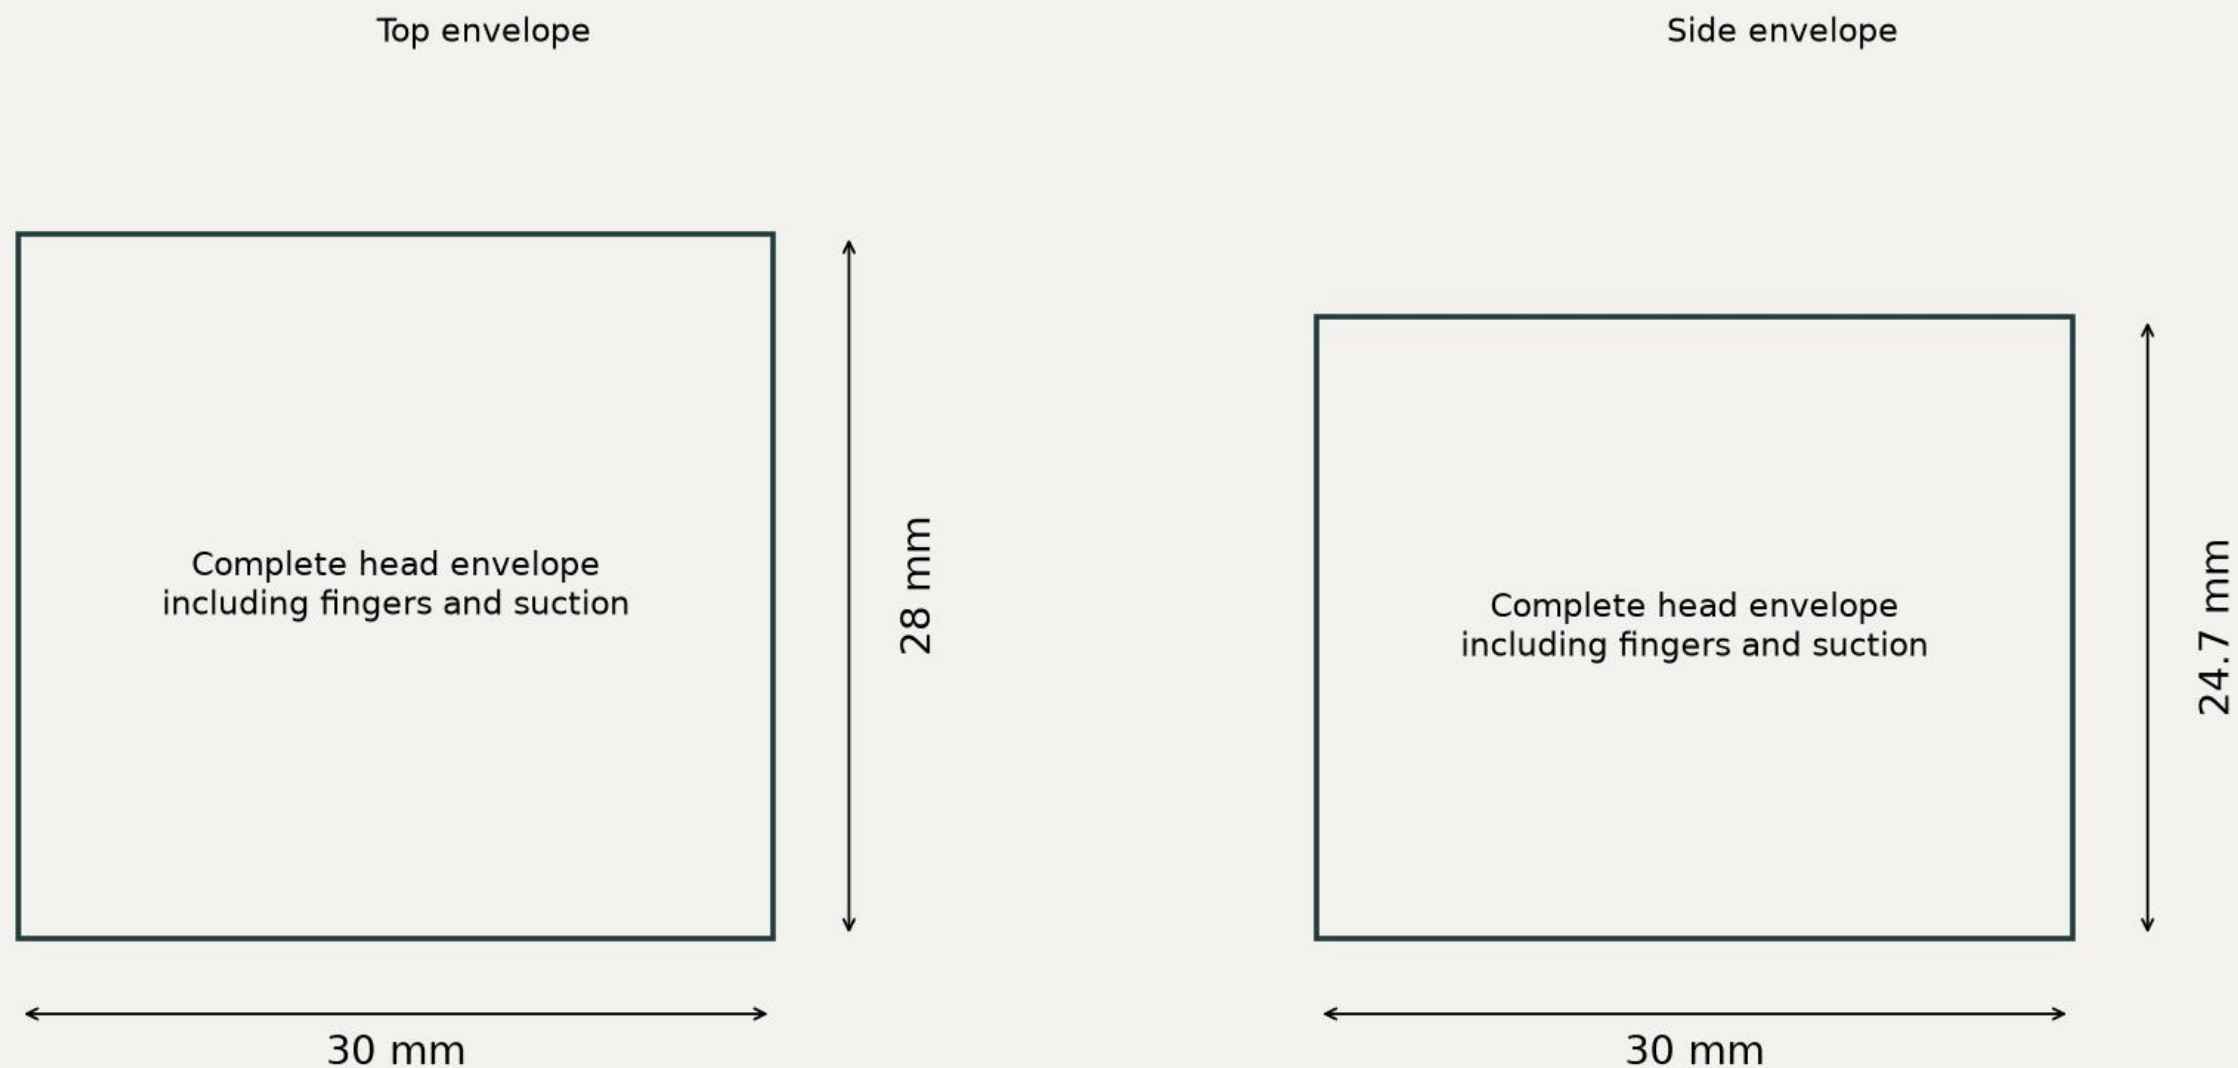

Main body $22 \times 20 \times 23$ mm • Pad footprint 2×6 mm • Open pad gap 1.20 mm

Envelope diagram, not a manufacturing drawing. Adapter, wiring and tubing clearance are additional.