


Engine Cummins HM8.3
Rated Power 194 kW (260 hp / 264 ps) @ 2,200 rpm
Standard Bucket Capacity 1.4 m³
Maximum Dig Depth 7,300 mm
Operating Weight 31,800 kg

933E EXCAVATOR

933E SPECIFICATIONS >>>

ENGINE	
Emission Regulation	Tier 2 / Stage II
Make	Cummins
Model	HM8.3
Rated Power	194 kW (260 hp / 264 ps) @ 2,200 rpm
Peak Torque	1,150 N·m @ 1,300 rpm
Number of Cylinders	6
Displacement	8.3 L

UNDERCARRIAGE	
Shoe Width	600 mm
Number of Shoes per Side	48
Number of Upper Rollers per Side	2
Number of Bottom Rollers per Side	9

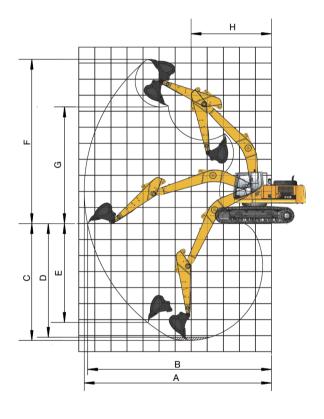

BOOM & ARM	
Boom Length	6,200 mm
Arm Length	3,050 mm

BUCKET PERFORMANCE	
Std. Bucket Heaped Capacity (Referenced)	1.4 m³
Min. Heaped Capacity of Bucket Options	1.4 m³
Max. Heaped Capacity of Bucket Options	1.6 m ³


TRACK DRIVE	
Maximum Travel Speed	5.5 km/h
Drawbar Pull	300 kN

SERVICE CAPACITIES	
Fuel Tank	520 L
Engine Oil	26.5 L
Cooling System	35 L
Hydraulic Reservoir	195 L
Hydraulic System Total	360 L

HYDRAULIC SYSTEM	
Main Pumps Total Flow	532 L/min
Relief Pressure, main	34.3 MPa
Relief Pressure, boost	37.3 MPa

SWING SYSTEM	
Swing Speed	10.3 rpm

WORKING RANGE	
A. Max. Digging Reach	10,653 mm
B. Max. Digging Reach on Ground	10,453 mm
C. Max. Digging Depth	7,300 mm
D. Max. Digging Depth, 2.44 m (8') level	7,096 mm
E. Max. Vertical Wall Digging Depth	6,216 mm
F. Max. Cutting Height	10,300 mm
G. Max. Dumping Height	7,265 mm
H. Min. Front Swing Radius	4,040 mm
Bucket Digging Force (ISO)	203 kN
Arm Digging Force (ISO)	149 kN

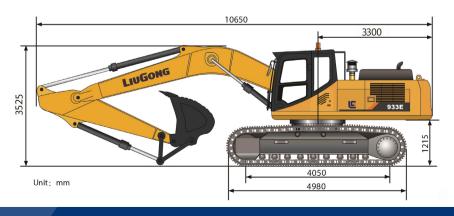



T: +86 772 3886124 www.liugong.com