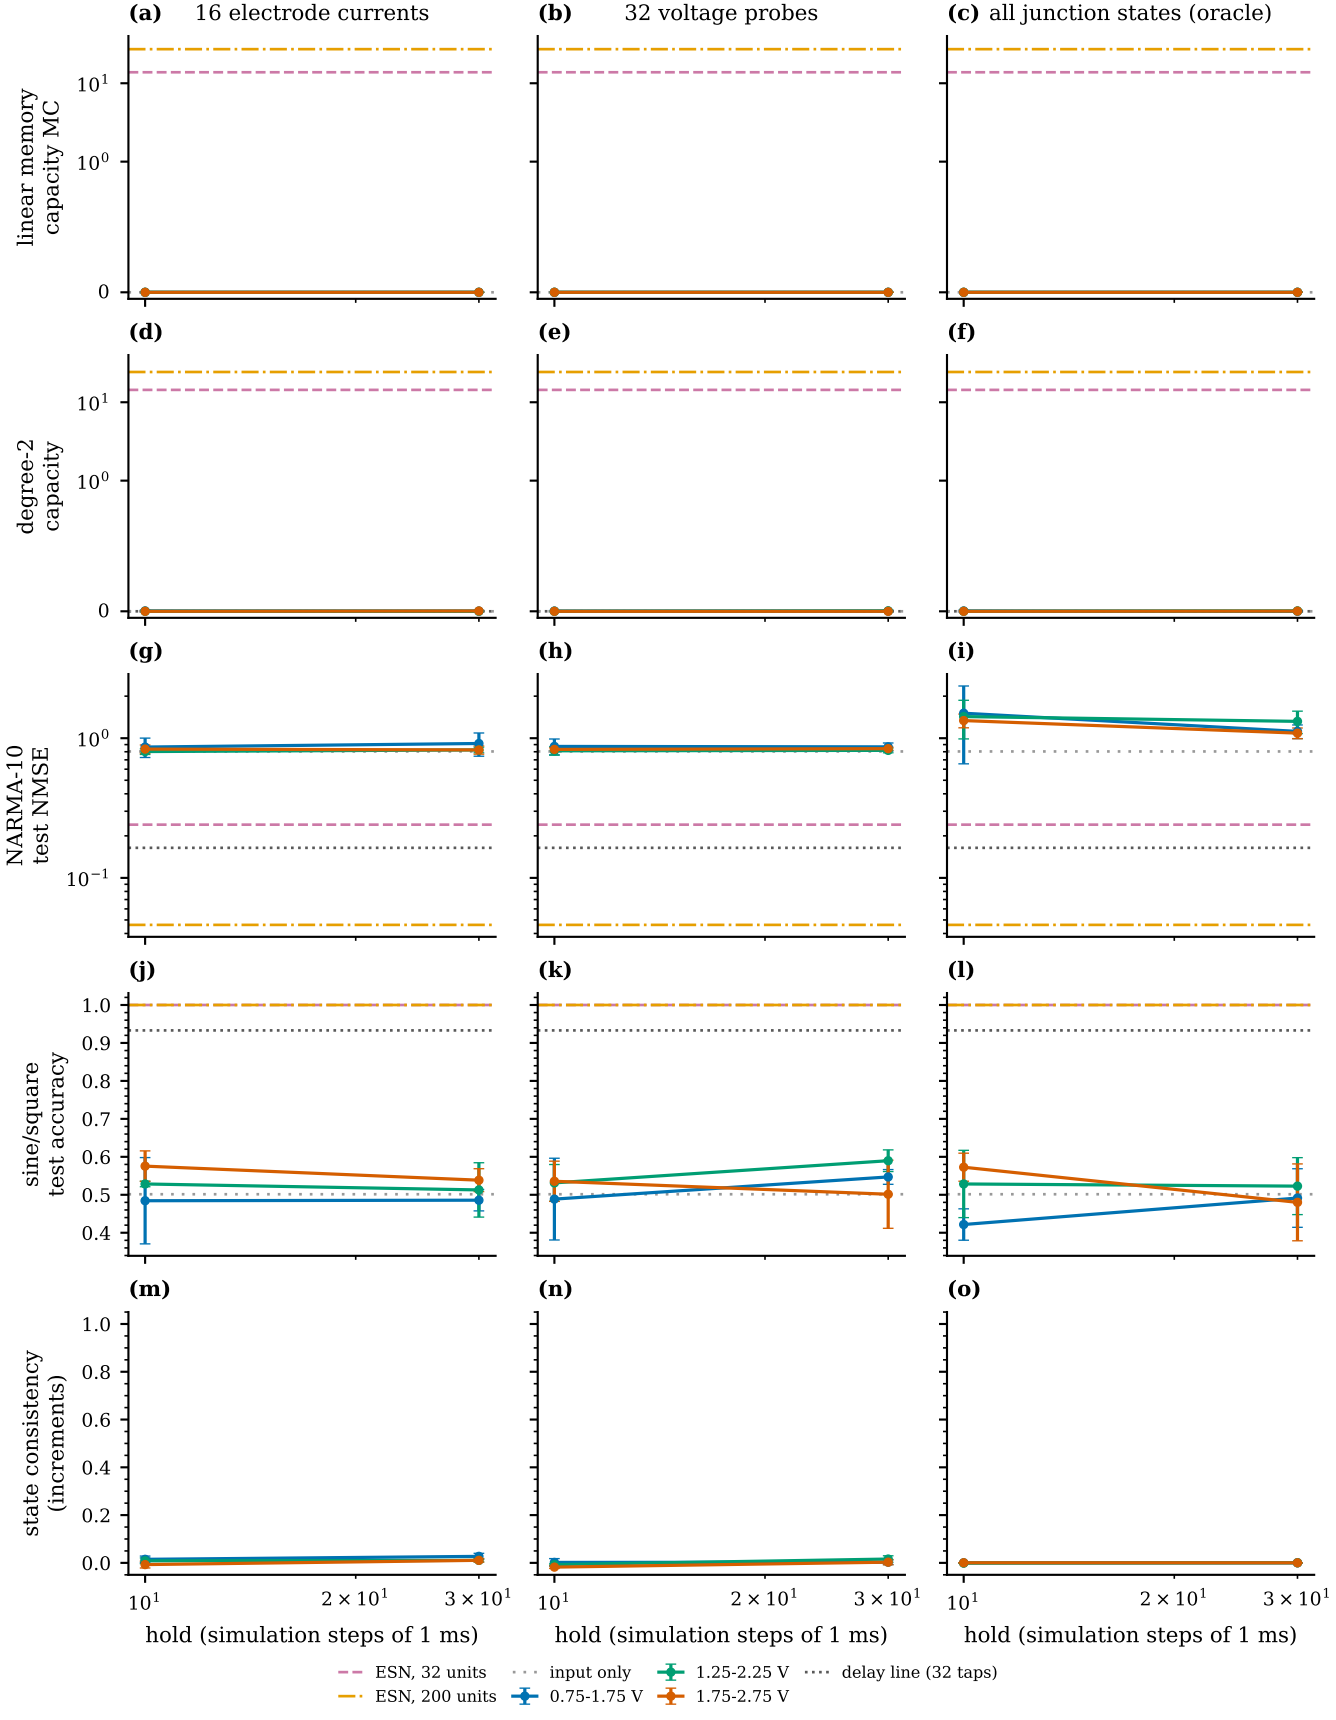
(a) 16 electrode currents
(b) 32 voltage probes
(c) all junction states (oracle)
linear memory capacity MC
degree-2 capacity
NARMA-10 test NMSE
sine/square test accuracy
state consistency (increments)
hold (simulation steps of 1 ms)
ESN, 32 units
ESN, 200 units
input only
0.75-1.75 V
1.25-2.25 V
1.75-2.75 V
delay line (32 taps)