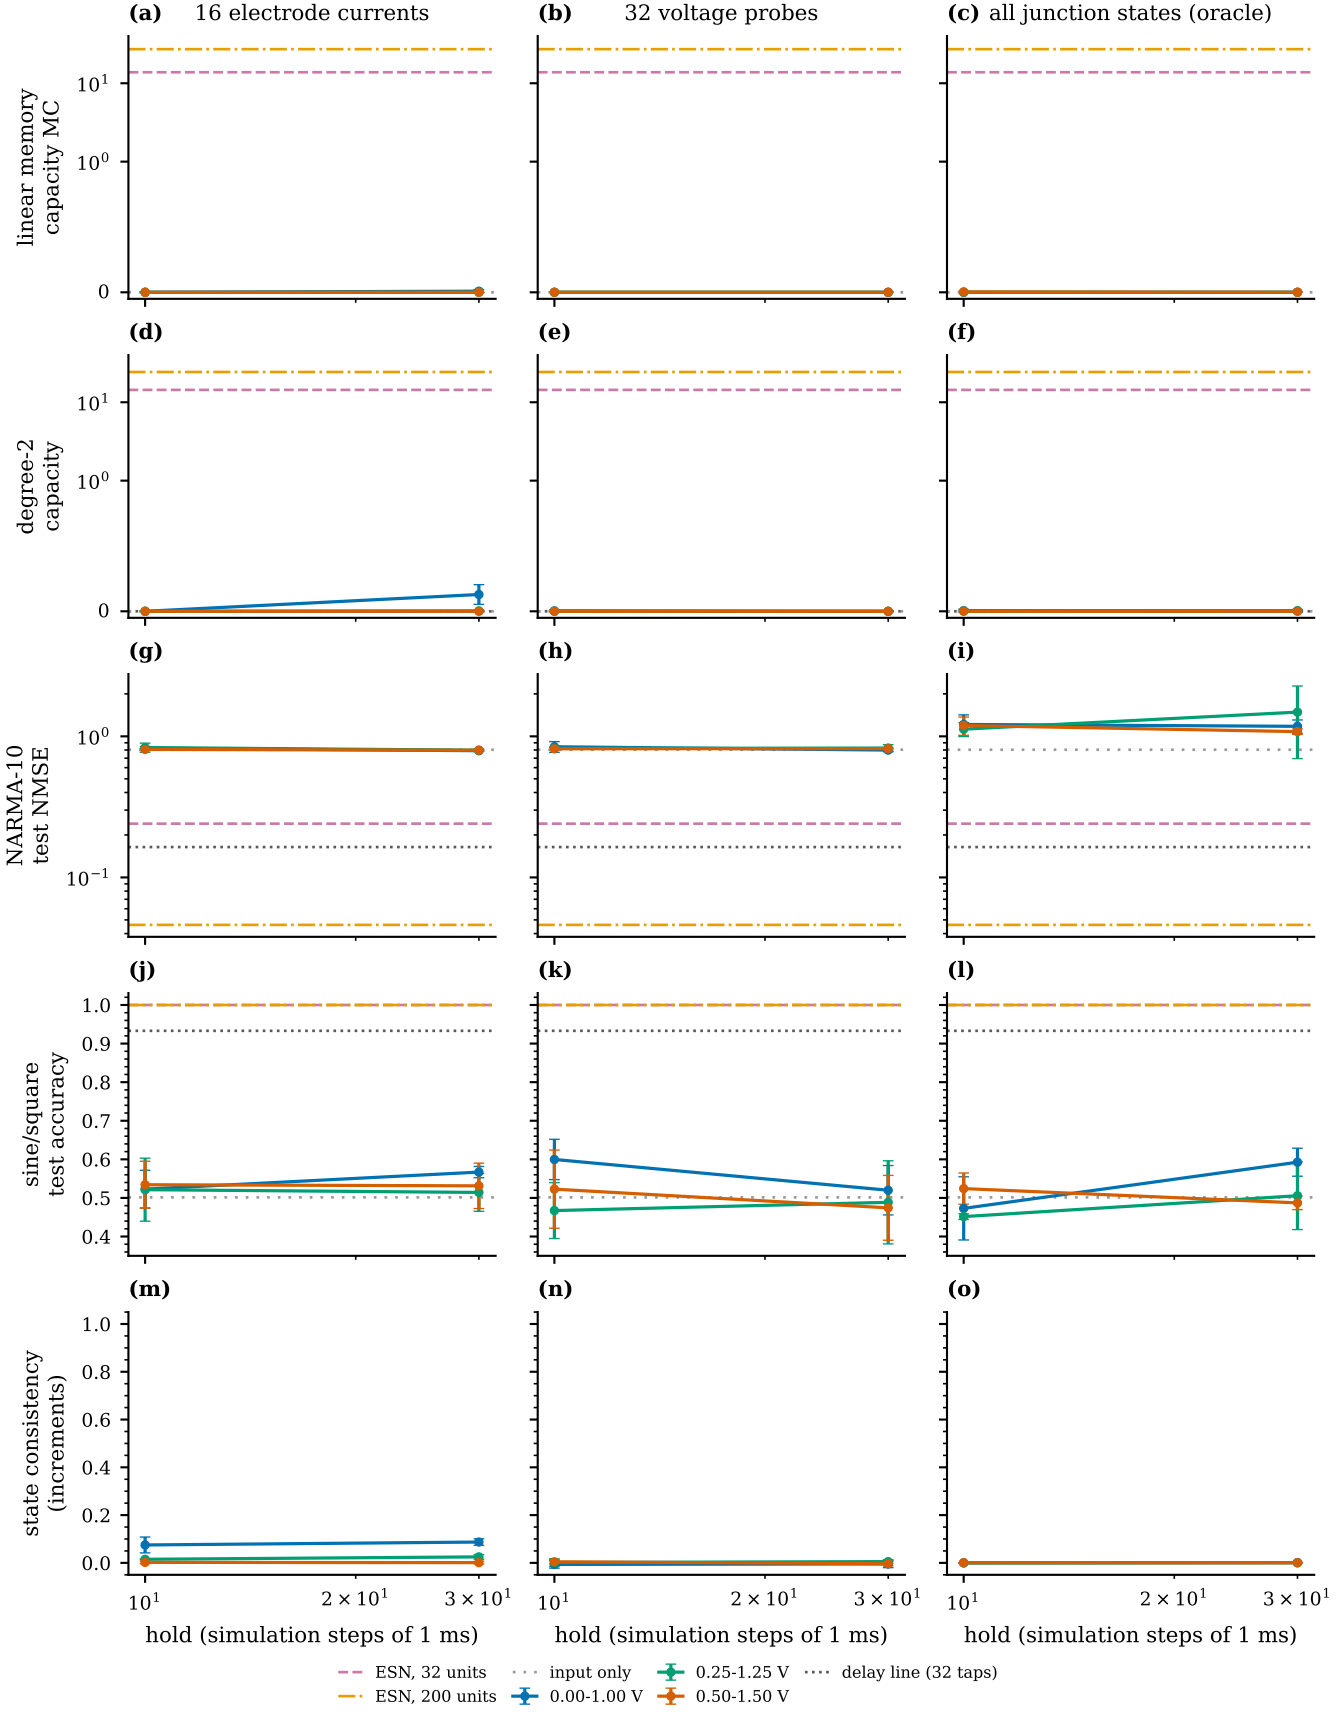
(a) 16 electrode currents
(b) 32 voltage probes
(c) all junction states (oracle)
linear memory capacity MC
degree-2 capacity
NARMA-10 test NMSE
sine/square test accuracy
state consistency (increments)
hold (simulation steps of 1 ms)
ESN, 32 units
ESN, 200 units
input only
0.00-1.00 V
0.25-1.25 V
0.50-1.50 V
delay line (32 taps)