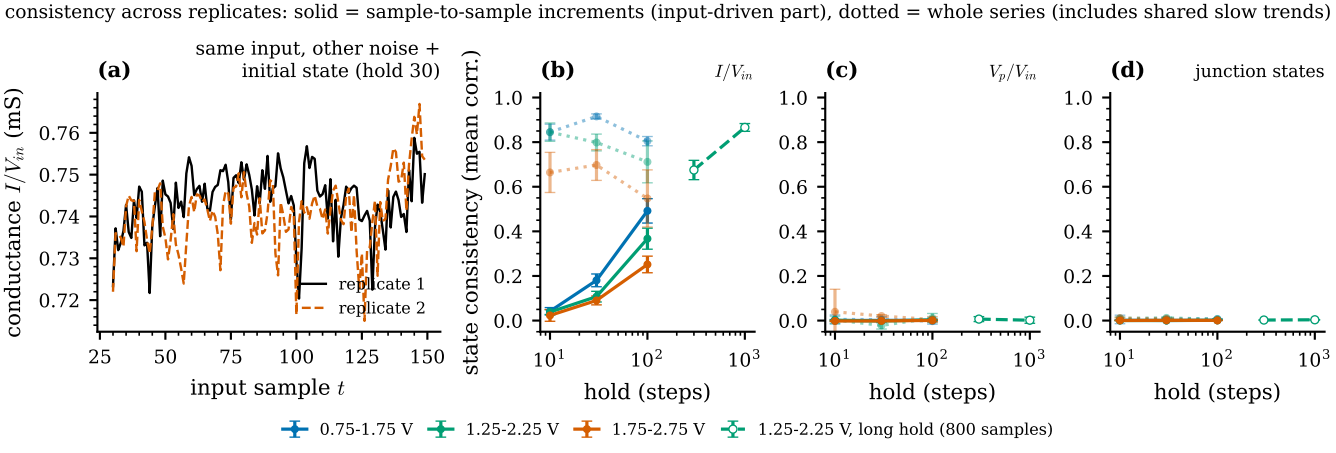
consistency across replicates: solid = sample-to-sample increments (input-driven part), dotted = whole series (includes shared slow trends)
(a)
same input, other noise +
initial state (hold 30)
conductance I/V_{in} (mS)
0.76
0.75
0.74
0.73
0.72
25
50
75
100
125
150
input sample t
replicate 1
replicate 2
(b)
I/V_{in}
state consistency (mean corr.)
1.0
0.8
0.6
0.4
0.2
0.0
10^1
10^2
10^3
hold (steps)
(c)
V_p/V_{in}
(d)
junction states
0.75-1.75 V
1.25-2.25 V
1.75-2.75 V
1.25-2.25 V, long hold (800 samples)