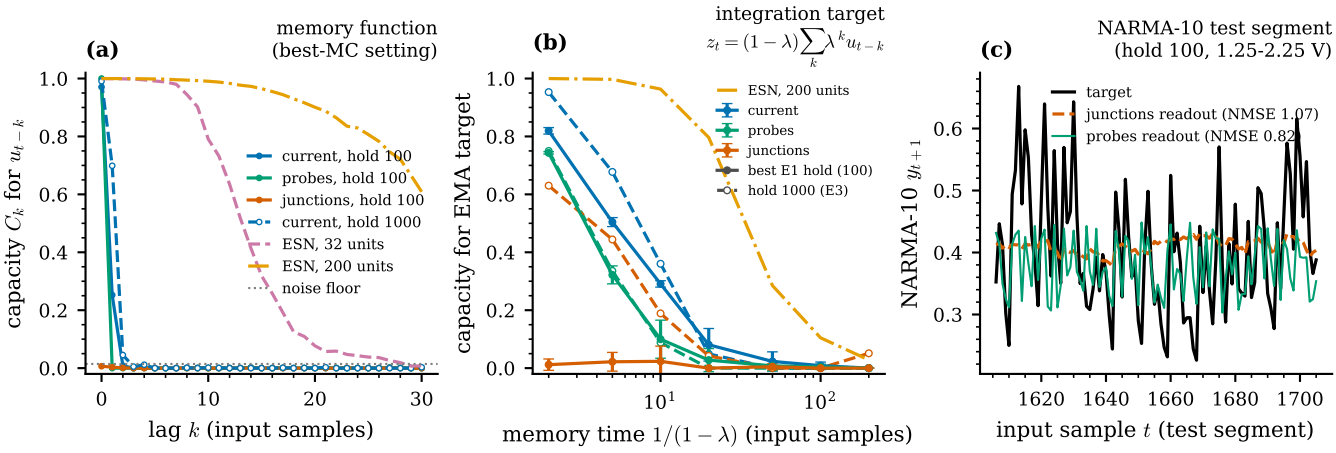
(a)
memory function
(best-MC setting)
capacity C_k for u_{t-k}
lag k (input samples)
current, hold 100
probes, hold 100
junctions, hold 100
current, hold 1000
ESN, 32 units
ESN, 200 units
noise floor
(b)
integration target
$z_t = (1-\lambda)\sum_k \lambda^k u_{t-k}$
capacity for EMA target
memory time $1/(1-\lambda)$ (input samples)
ESN, 200 units
current
probes
junctions
best E1 hold (100)
hold 1000 (E3)
(c)
NARMA-10 test segment
(hold 100, 1.25-2.25 V)
NARMA-10 y_{t+1}
input sample t (test segment)
target
junctions readout (NMSE 1.07)
probes readout (NMSE 0.82)