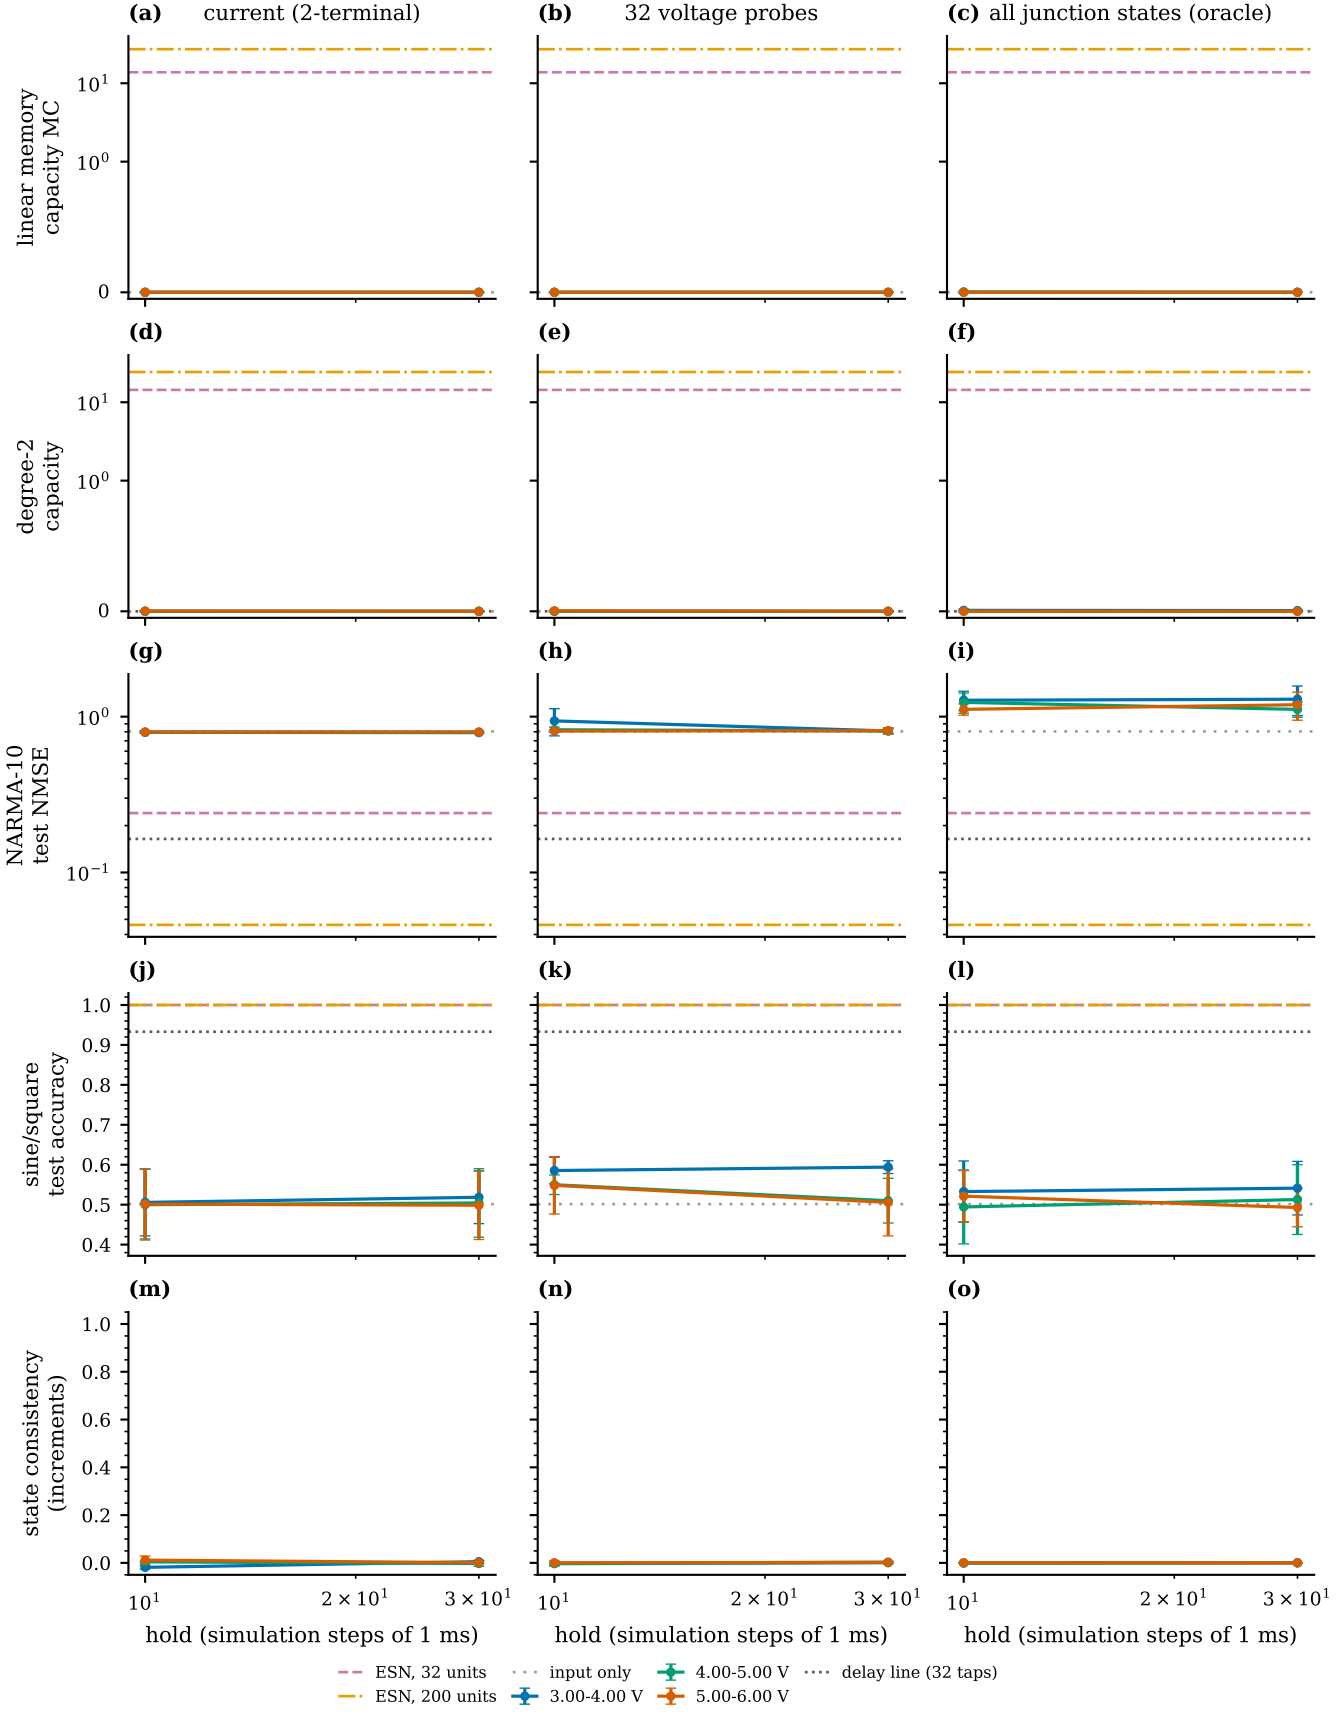
(a) current (2-terminal)
(b) 32 voltage probes
(c) all junction states (oracle)
linear memory capacity MC
(d)
(e)
(f)
degree-2 capacity
(g)
(h)
(i)
NARMA-10 test NMSE
(j)
(k)
(l)
sine/square test accuracy
(m)
(n)
(o)
state consistency (increments)
hold (simulation steps of 1 ms)
ESN, 32 units
ESN, 200 units
input only
3.00-4.00 V
4.00-5.00 V
5.00-6.00 V
delay line (32 taps)