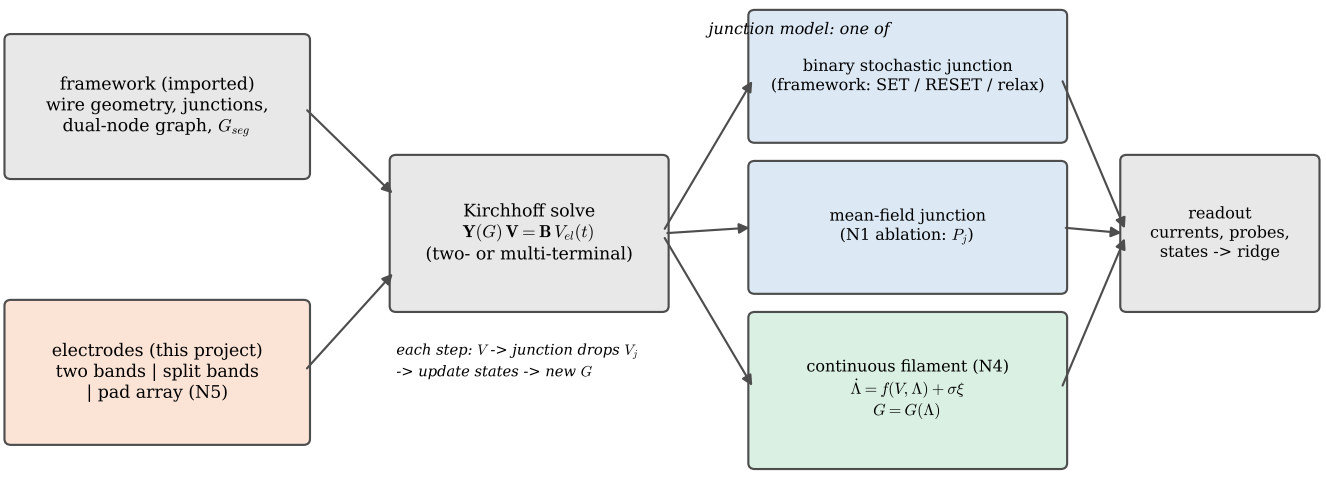
framework (imported)
wire geometry, junctions,
dual-node graph, G_{seg}
electrodes (this project)
two bands | split bands
| pad array (N5)
Kirchhoff solve
$\mathbf{Y}(G)\,\mathbf{V} = \mathbf{B}\,V_{el}(t)$
(two- or multi-terminal)
each step: V -> junction drops V_j
-> update states -> new G
junction model: one of
binary stochastic junction
(framework: SET / RESET / relax)
mean-field junction
(N1 ablation: P_j)
continuous filament (N4)
$\dot{\Lambda} = f(V, \Lambda) + \sigma\xi$
$G = G(\Lambda)$
readout
currents, probes,
states -> ridge