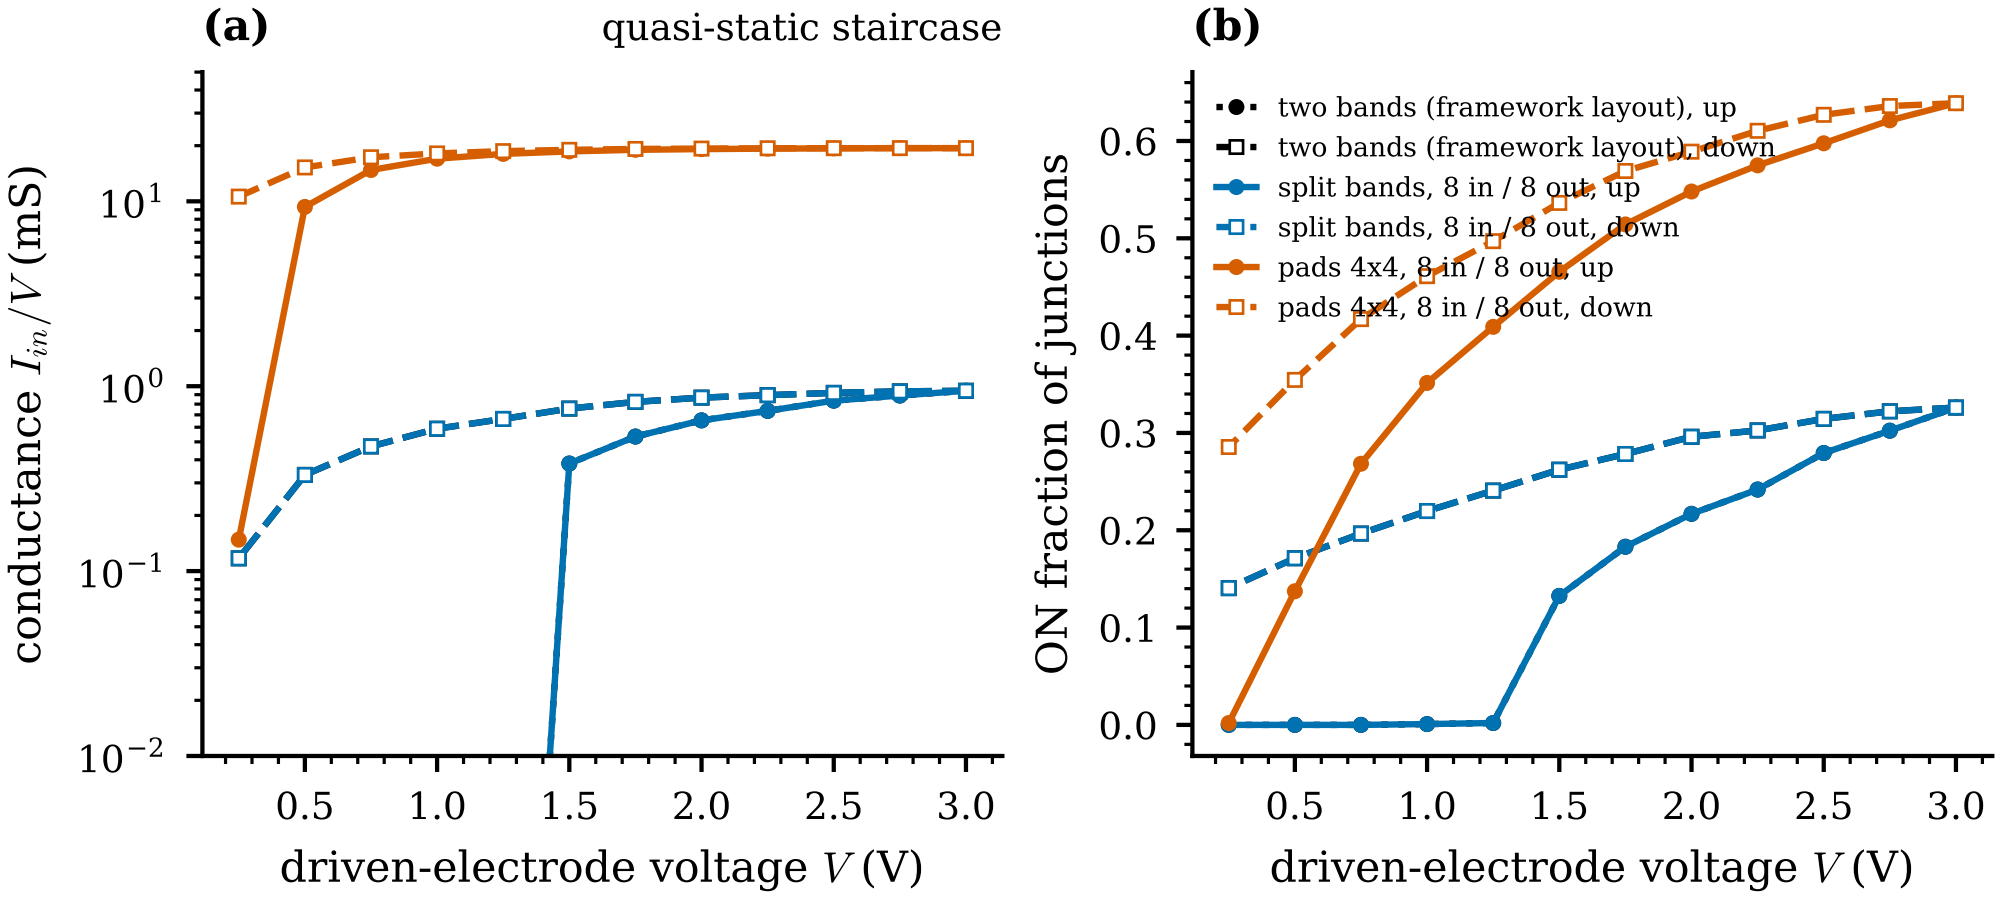
(a)
quasi-static staircase
conductance I_{in}/V (mS)
10^{1}
10^{0}
10^{-1}
10^{-2}
0.5
1.0
1.5
2.0
2.5
3.0
driven-electrode voltage V (V)
(b)
ON fraction of junctions
0.0
0.1
0.2
0.3
0.4
0.5
0.6
two bands (framework layout), up
two bands (framework layout), down
split bands, 8 in / 8 out, up
split bands, 8 in / 8 out, down
pads 4x4, 8 in / 8 out, up
pads 4x4, 8 in / 8 out, down
0.5
1.0
1.5
2.0
2.5
3.0
driven-electrode voltage V (V)