


220.13-12

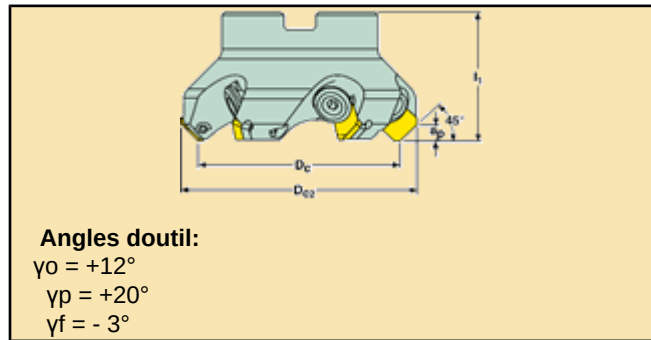

Pas	Référence	Dimensions en mm							
		Dc	Dc2	l1	ap*				
Normal									
	R220.13-0040-12	40	54	45	6	3	0,4	10700	SE..1203/1303
	R220.13-0050-12	50	64	48	6	4	0,6	9600	SE..1203/1303
	R220.13-0063-12	63	77	40	6	5	0,6	8500	SE..1203/1303
	R220.13-0080-12	80	94	50	6	6	1,0	7600	SE..1203/1303
	R220.13-0100-12	100	114	50	6	6	1,6	6800	SE..1203/1303
	R220.13-0125-12	125	139	63	6	7	2,8	6000	SE..1203/1303
	R220.13-8160-12	160	174	63	6	7	5,0	5300	SE..1203/1303

* Pour 13 mm de longueur d'arête, $a_p = 5$ mm.

Accessoires

Pour fraise	Vis de serrage	Clé *	Assise	Vis d'assise	Clé *	Vis de mandrin
R220.13-0040	SL68015	H04-4	220.13-621	F94009-T09P	T09P-3	220.17-691
R220.13-0050	269.2-649	H04-4	220.13-621	F94009-T09P	T09P-3	220.17-691
R220.13-0063	269.2-649	H04-4	220.13-621	F94009-T09P	T09P-3	220.17-692
R220.13-0080-8160	269.2-649	H04-4	220.13-621	F94009-T09P	T09P-3	—

Cotes de montage

	Dimensions en mm				Pour mandrin	Pour nez de broche
	Pour fraise	dm	Bkw	c		
	R220.13-0040-0063	22	10,4	6,3	—	—
	R220.13-0080	27	12,4	7	—	—
	R220.13-0100	32	14,4	8	—	—
	R220.13-0125	40	16,4	9	—	—
	R220.13-8160	40	16,4	9	66,7	ISO40