


PISO_BLOCK

This Block takes the convoluted output from the ALU block in parallel form all bits at once and stores it into an internal register. After the output is stored in the internal register of the PISO block. The data is shifted left one bit at a time (serially starting with the MSB). The most challenging part of this block is managing the bits to make sure `dataout[0]` does not have some of its bits mixed with `dataout[1]`.

WaveView of the testbench

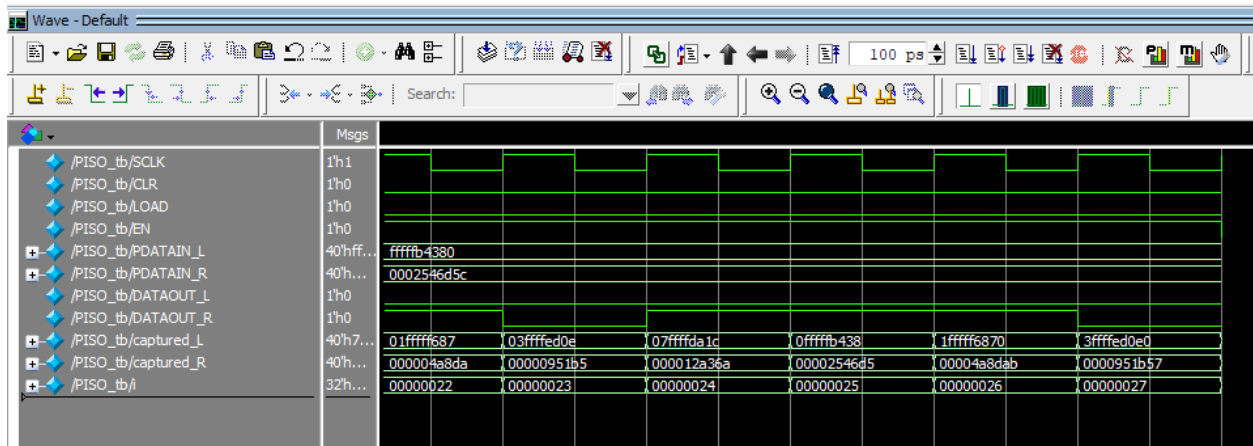

Block Diagram of the PISO block

