


Mainboard Kit for SV06 ACE

- **Advanced Control Chip:** 3308 control chip for enhanced performance and stability.
- **Generous Storage:** 512M RAM and 8GB EMMC storage for seamless operation.
- **High-quality Motor Drivers:** Equipped with TMC2209 motor drivers for quieter and smoother movement.
- **Easy Installation:** Direct replacement for SV06 ACE, solving wear or malfunction issues.

Product Specifications

Specification	Details
Product Name	Mainboard Kit
Material	Metal + Plastic
Color	Black + Blue
Included Items	Mainboard x 1
Control Chip	3308
Firmware	Klipper
Flash Memory	8GB EMMC
System Architecture	64bit
RAM	512M
Motor Drivers	TMC2209 (x4)
Product Size	140(L) x 78(W) x 17(H) mm
Net Weight	96.4g
Gross Weight	185g
Packaging Size	175 x 120 x 50mm
Compatible Printer Models	SV06 ACE
Operating Environment	≤80°C

Mainboard Port Diagram

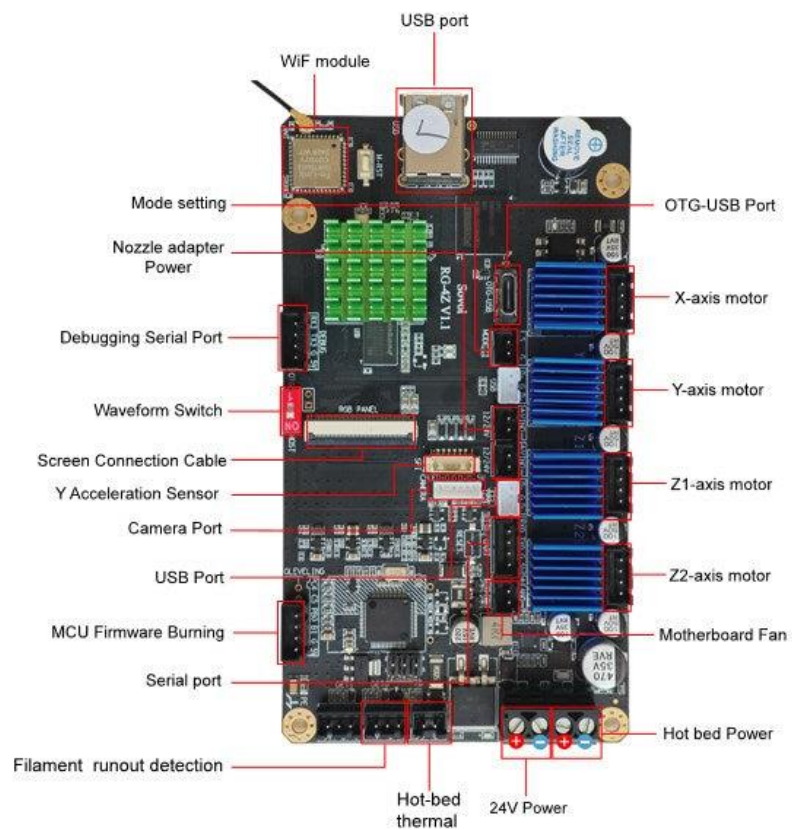

Installation Instructions




Step 1: Power off the printer and unplug the power cable.



Step 2: Use an H2.5 screwdriver to open the control box and remove the old mainboard.



Step 5: Reconnect all the wires to the corresponding ports on the new mainboard.

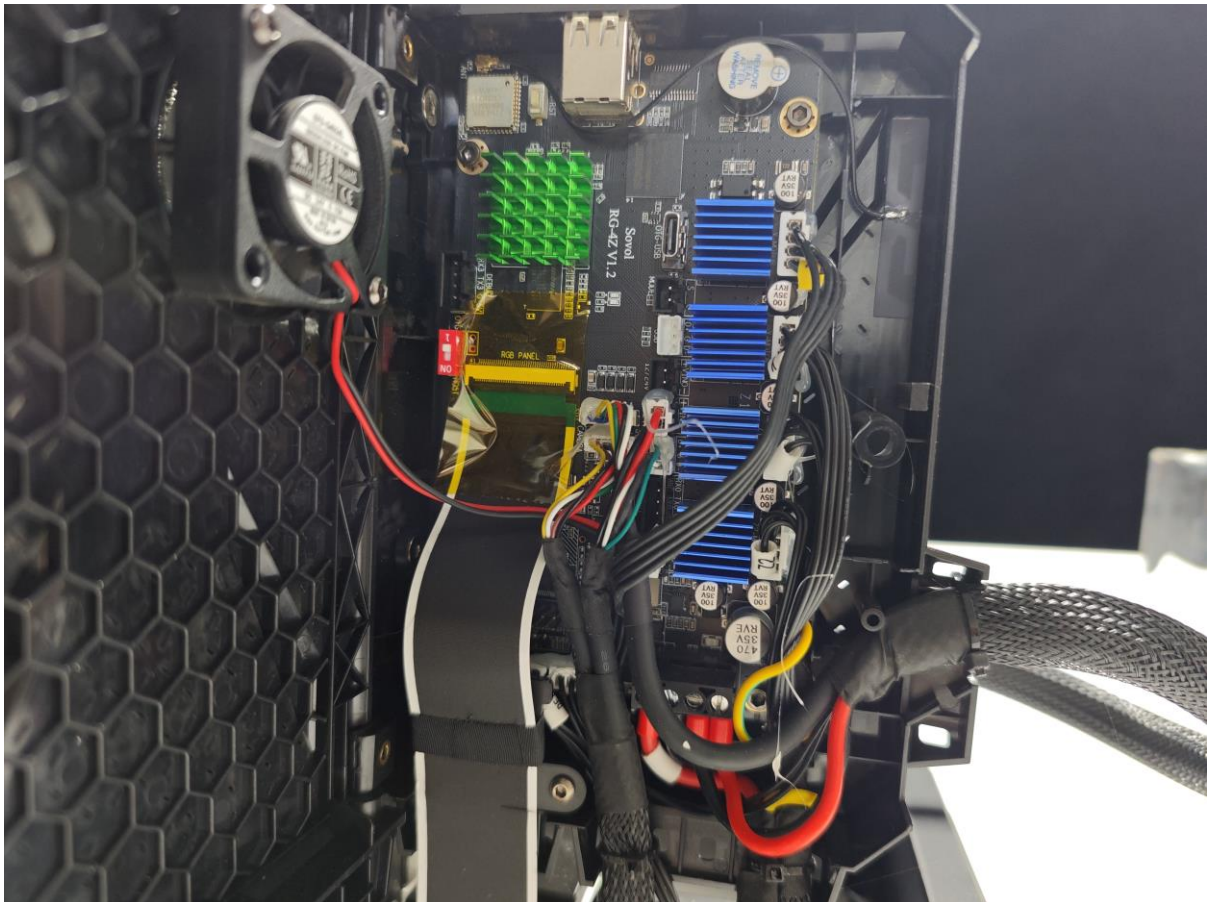

Step 6: Close the control box, tighten all screws, and power on the printer for testing.

Installation Notes

- Ensure the printer is completely powered off and unplugged before starting the installation process.
- Handle the new mainboard with care to avoid static damage—use an anti-static wrist strap if possible.
- Double-check all wiring connections before securing the mainboard to the control box to ensure that everything is connected properly.
- Ensure the mainboard is properly secured with all screws tightened to prevent movement during operation.
- Test the printer carefully after installation by powering it on and running a small test print to ensure everything is working correctly.
- If any issues arise during installation, refer to the installation guide or contact customer support for further assistance.