

TWR	118.2(E)	118.8(W)
GND	121.75(E)	121.7(W)
APRON	121.65	122.175
	123.675	121.8
		123.325


ELEVATIONS AND DIMENSION IN METERS  
BEARINGS ARE MAGNETIC



ANNUAL RATE OF CHANGE  
6' W

LEGEND	
	VOR CHECK-POINT AND FREQUENCY
	Stop-bar light
	Holding position
	Taxi lane
	Gate
	Remote stand
	Taxi routes
	De-icing pad taxi routes
	Powered taxi-start point
	Transfer of control point(TCP)
	Open Channel
	Hot Spot
	ATC service boundary (Maneuvering Area)
	RPBB (Remote Passenger Boarding Bridge)

Note  
All aeroplane will taxi at speeds of more than 10 kt on Taxiways A, B, C, D, M, N or P to ensure smooth traffic flow unless there is exceptional direction concerning safety factors by ATC. And if it is impracticable, pilots shall notify to ATC.

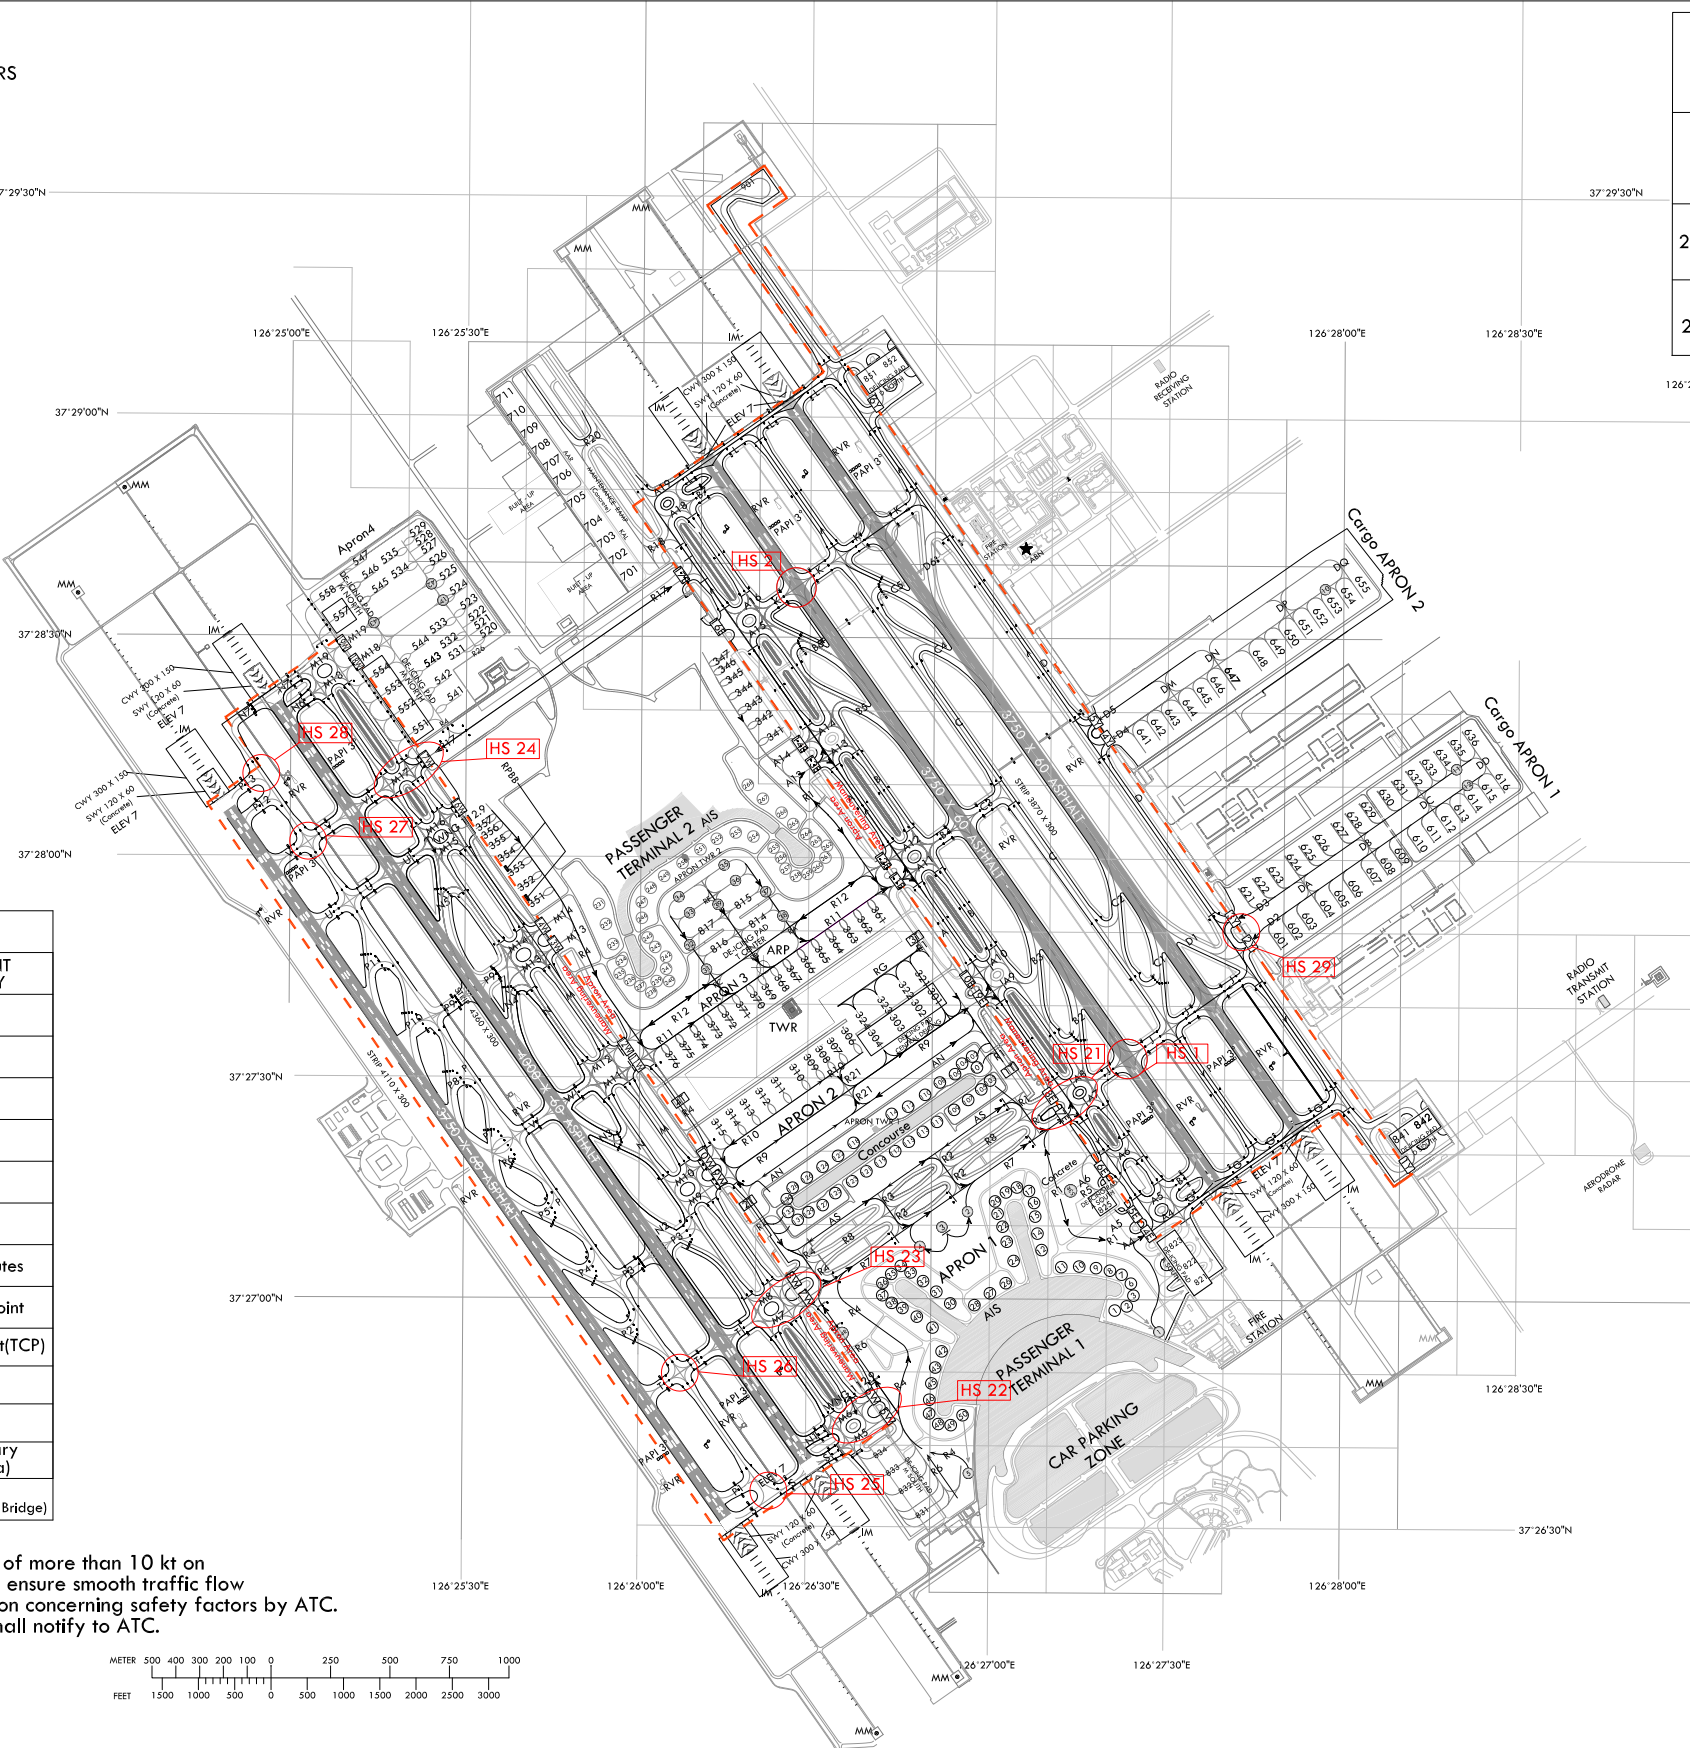

HS 1	AIRCRAFT TAXIING ON TAXIWAY J FROM RUNWAY 15L AFTER LANDING USE CAUTION WHEN ATC UTILIZES RUNWAY 15R FOR TAKEOFFS. DO NOT CROSS THE HOLDING MARKING FOR RUNWAY 15R WITHOUT ATC AUTHORIZATION.
HS 2	AIRCRAFT TAXIING ON TAXIWAY K FROM RUNWAY 33R AFTER LANDING USE CAUTION WHEN ATC UTILIZES RUNWAY 33L FOR TAKEOFFS. DO NOT CROSS THE HOLDING MARKING FOR RUNWAY 33L WITHOUT ATC AUTHORIZATION.
HS 21 ~ 24, 29	USE CAUTION OF CONFUSION ON TAXIWAYS. DO NOT PROCEED TAXIING BEYOND TRANSFER OF CONTROL POINTS WITHOUT CLEARANCE FROM INCHEON APRON OR GROUND(TOWER).
HS 25 ~ 28	USE CAUTION OF CONFUSION ON TAXIWAYS.

Note 1  
When non-standard taxi routes are applicable, Incheon APRON will issue transition taxi instructions one to another taxi lane in APRON 2, APRON 3, APRON 4 and Cargo APRONS.

Note 2  
Aircraft shall not taxi into maneuvering area without clearance from Incheon Tower or Ground.

		SURFACE	WIDTH	STRENGTH
APRON	Apron 1, 2 Cargo Apron 1 Maintenance Apron	Concrete	-	PCN 86/R/B/X/T
	Apron 3, 4 Cargo Apron 2			PCN 85/R/B/X/T
TWY A, D		Concrete	30 m	PCN 86/R/B/X/T
TWY B, C		Asphalt	Shoulder : 15 m - Paved : 12 m - Turfed : 3 m	PCN 88/F/B/X/T
TWY M		Concrete	30 m Shoulder : 15 m - Paved : 15 m	PCN 85/R/B/X/T
TWY N		Asphalt		PCN 75/F/B/X/T
TWY P		Asphalt		PCN 75/F/B/X/T

Taxiway edge lights on all taxiways curve area  
Taxiway center line lights on all taxiways  
PAX Terminal and Concourse A VDGS equipped



AERODROME GROUND  
MOVEMENT CHART - ICAO

APRON ELEV 6 m

TWR	118.2(E)	118.8(W)
GND	121.75(E)	121.7(W)
APRON	121.65	122.175
	121.8	123.325

SEOUL / Incheon Intl  
RWY 15L/R, 33L/R ARRIVAL

ELEVATIONS AND DIMENSION IN METERS  
BEARINGS ARE MAGNETIC



ANNUAL RATE OF CHANGE  
6' W

HS 1	AIRCRAFT TAXIING ON TAXIWAY J FROM RUNWAY 15L AFTER LANDING USE CAUTION WHEN ATC UTILIZES RUNWAY 15R FOR TAKEOFFS. DO NOT CROSS THE HOLDING MARKING FOR RUNWAY 15R WITHOUT ATC AUTHORIZATION.
HS 2	AIRCRAFT TAXIING ON TAXIWAY K FROM RUNWAY 33R AFTER LANDING USE CAUTION WHEN ATC UTILIZES RUNWAY 33L FOR TAKEOFFS. DO NOT CROSS THE HOLDING MARKING FOR RUNWAY 33L WITHOUT ATC AUTHORIZATION.
HS 21~24, 29	USE CAUTION OF CONFUSION ON TAXIWAYS. DO NOT PROCEED TAXIING BEYOND TRANSFER OF CONTROL POINTS WITHOUT CLEARANCE FROM INCHEON APRON OR GROUND(TOWER).
HS 25~28	USE CAUTION OF CONFUSION ON TAXIWAYS.

Note 1  
All aeroplane will taxi at speeds of more than 10 kt on Taxiways A, B, C, D, M, N or P to ensure smooth traffic flow unless there is exceptional direction concerning safety factors by ATC. And if it is impracticable, pilots shall notify to ATC.

Note 2  
When non-standard taxi routes are applicable, Incheon APRON will issue transition taxi instructions one to another taxilane in APRON 2, APRON 3, APRON 4 and Cargo APRONS.

CAUTION  
For Gate 11 and 42, pilots needs to pay extra caution to follow the lead lines, which may require more than two turns.

APRON	SURFACE	WIDTH	STRENGTH
			PCN
Apron 1, 2 Cargo Apron 1 Maintenance Apron	Concrete		PCN 86/R/B/X/T
Apron 3, 4 Cargo Apron 2	Concrete		PCN 85/R/B/X/T
TWY A, D	Concrete	30 m Shoulder : 1.5 m - Paved : 1.2 m - Turfed : 3 m	PCN 86/R/B/X/T
TWY B, C	Asphalt		PCN 88/F/B/X/T
TWY M	Concrete		PCN 85/R/B/X/T
TWY N	Asphalt	30 m Shoulder : 1.5 m - Paved : 1.5 m	PCN 75/F/B/X/T
TWY P	Asphalt		PCN 75/F/B/X/T

Taxiway edge lights on all taxiways curve area  
Taxiway center line lights on all taxiways  
PAX Terminal and Concourse A VDGS equipped

LEGEND	
WNG 112.9	VOR CHECK-POINT AND FREQUENCY
• • •	Stop-bar light
54R	Holding position
R4	Taxi lane
50	Gate
301	Remote stand
→	Taxi routes
->	Alternate Taxi routes
1E	Transfer of control point(TCP)
Open Channel	Open Channel
Hot Spot	Hot Spot
ATC service boundary (Maneuvering Area)	ATC service boundary (Maneuvering Area)
RPBB (Remote Passenger Boarding Bridge)	RPBB (Remote Passenger Boarding Bridge)



Change : Establishment of hot spot(HS 29).



AERODROME GROUND  
MOVEMENT CHART - ICAO

APRON ELEV 6 m


TWR 118.2(E) 118.8(W)  
GND 121.75(E) 121.7(W)  
APRON 121.65 122.175 123.675  
121.8 123.325

SEOUL / Incheon Intl  
RWY 16L/R, 34L/R DEPARTURE

ELEVATIONS AND DIMENSION IN METERS  
BEARINGS ARE MAGNETIC



ANNUAL RATE OF CHANGE  
6' W

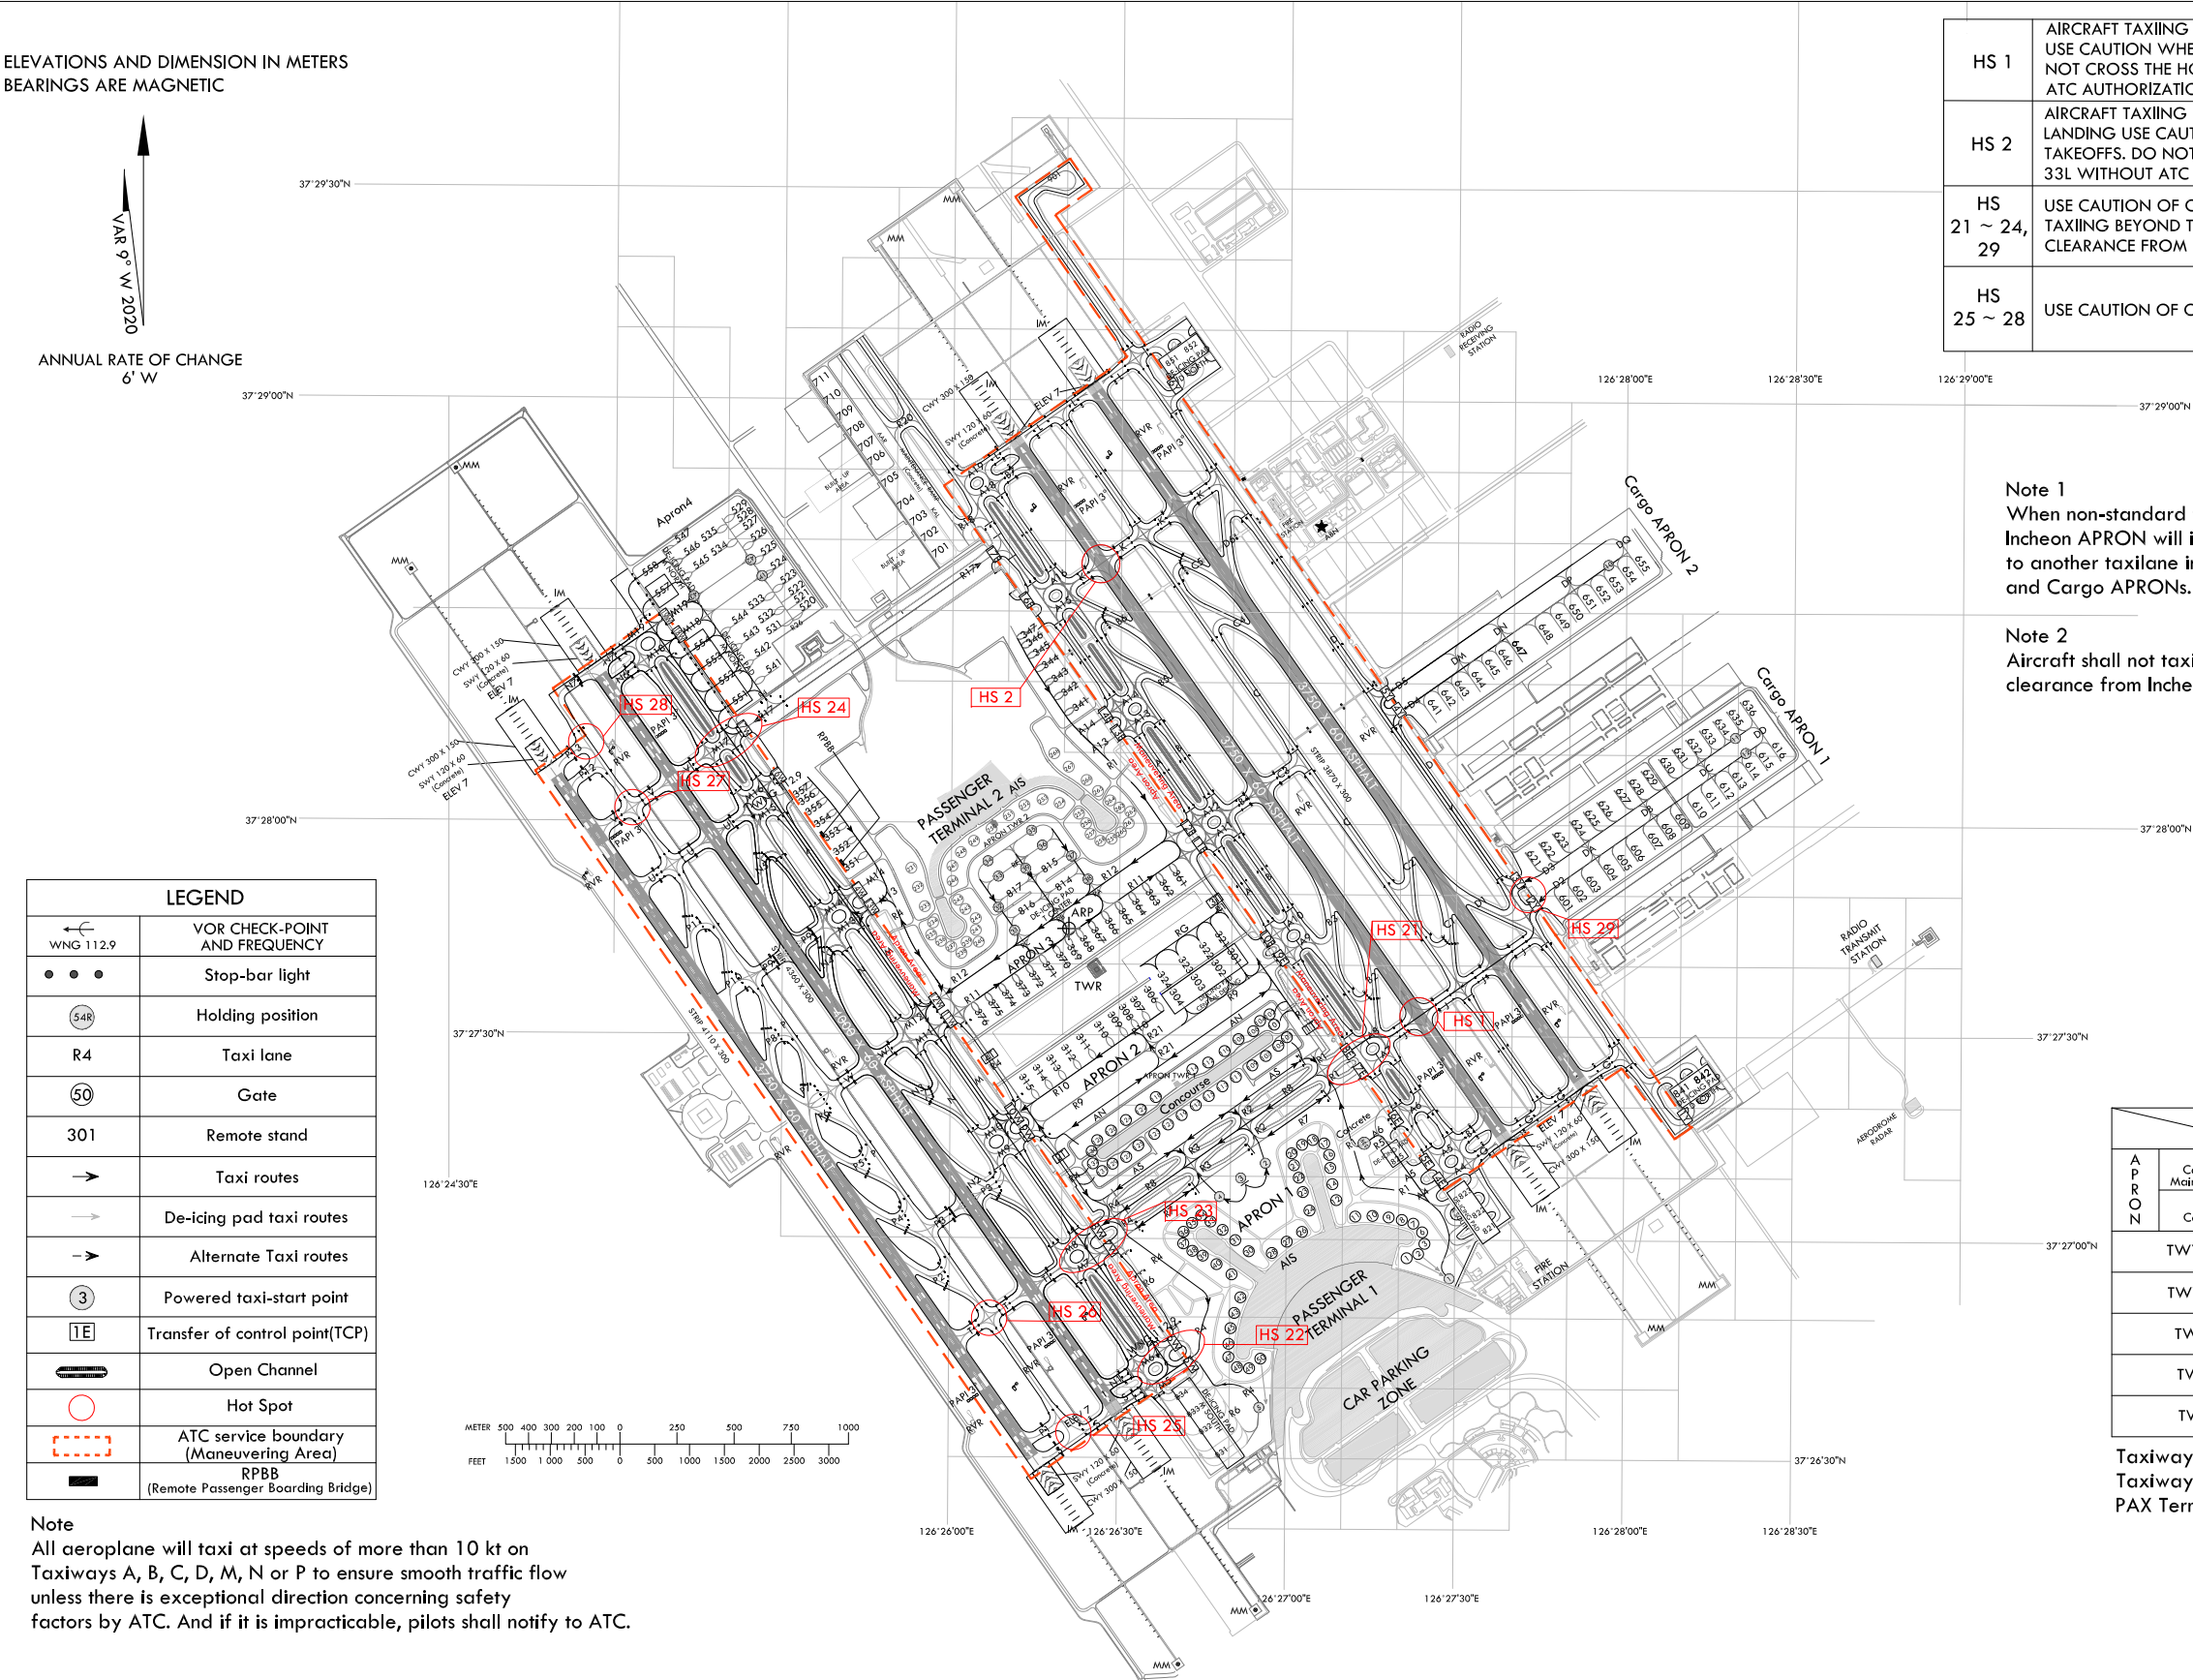

HS 1	AIRCRAFT TAXIING ON TAXIWAY J FROM RUNWAY 15L AFTER LANDING USE CAUTION WHEN ATC UTILIZES RUNWAY 15R FOR TAKEOFFS. DO NOT CROSS THE HOLDING MARKING FOR RUNWAY 15R WITHOUT ATC AUTHORIZATION.
HS 2	AIRCRAFT TAXIING ON TAXIWAY K FROM RUNWAY 33R AFTER LANDING USE CAUTION WHEN ATC UTILIZES RUNWAY 33L FOR TAKEOFFS. DO NOT CROSS THE HOLDING MARKING FOR RUNWAY 33L WITHOUT ATC AUTHORIZATION.
HS 21 ~ 24, 29	USE CAUTION OF CONFUSION ON TAXIWAYS. DO NOT PROCEED TAXIING BEYOND TRANSFER OF CONTROL POINTS WITHOUT CLEARANCE FROM INCHEON APRON OR GROUND(TOWER).
HS 25 ~ 28	USE CAUTION OF CONFUSION ON TAXIWAYS.

Note 1  
When non-standard taxi routes are applicable,  
Incheon APRON will issue transition taxi instructions one  
to another taxilane in APRON 2, APRON 3, APRON 4  
and Cargo APRONS.

Note 2  
Aircraft shall not taxi into maneuvering area without  
clearance from Incheon Tower or Ground.

LEGEND	
	VOR CHECK-POINT AND FREQUENCY
	Stop-bar light
	Holding position
	Taxi lane
	Gate
	Remote stand
	Taxi routes
	De-icing pad taxi routes
	Alternate Taxi routes
	Powered taxi-start point
	Transfer of control point(TCP)
	Open Channel
	Hot Spot
	ATC service boundary (Maneuvering Area)
	RPBB (Remote Passenger Boarding Bridge)

Note  
All aeroplane will taxi at speeds of more than 10 kt on  
Taxiways A, B, C, D, M, N or P to ensure smooth traffic flow  
unless there is exceptional direction concerning safety  
factors by ATC. And if it is impracticable, pilots shall notify to ATC.

		SURFACE	WIDTH	STRENGTH
A P R O N	Apron 1, 2 Cargo Apron 1 Maintenance Apron	Concrete	-	PCN 86/R/B/X/T
	Apron 3, 4 Cargo Apron 2			PCN 85/R/B/X/T
	TWY A, D	Concrete	30 m Shoulder : 1.5 m - Paved : 1.2 m - Turfed : 3 m	PCN 86/R/B/X/T
	TWY B, C	Asphalt		PCN 88/F/B/X/T
	TWY M	Concrete		PCN 85/R/B/X/T
	TWY N	Asphalt	30 m Shoulder : 1.5 m - Paved : 1.5 m	PCN 75/F/B/X/T
	TWY P	Asphalt		PCN 75/F/B/X/T

Taxiway edge lights on all taxiways curve area  
Taxiway center line lights on all taxiways  
PAX Terminal and Concourse A VDGS equipped

Change : Establishment of hot spot(HS 29).



AERODROME GROUND  
MOVEMENT CHART - ICAO

APRON ELEV 6 m

TWR 118.2(E) 118.8(W)  
GND 121.75(E) 121.7(W)  
APRON 121.65 122.175 123.675  
121.8 123.325

RKSI AD CHART 2 - 9  
7 APR 2022  
SEOUL / Incheon Intl  
RWY 16L/R, 34L/R ARRIVAL

