

SEOUL/Gimpo Intl(RKSS) RWY 14L/R RNAV OLMEN 2U, RNAV GUKDO 2U

### **AERONAUTICAL DATA TABULATION**

## Standard Instrument Arrival Procedure Coding Tables

Remarks	1	•	Bank angle 25°	Bank angle 25°	•			ı		1	IAF
Navigation specification	RNAV 1										
VPA/ RDH								•		-	
Coordinates	36°44'13.4"N 126°59'27.6"E	37°01'25.6"N 127°19'16.4"E	37°07'44.6"N 127°26'37.4"E	37°13'49.2"N 127°26'39.5"E	37°21'46.7"N 127°12'17.2"E	37°24'49.0"N 126°55'42.1"E	37°27'28.2"N 126°48'09.4"E	37°29'12.0"N 126°42'00.0"E	37°29'53.6"N 126°35'48.1"E	37°34'09.7"N 126°30'26.7"E	37°36'17.1"N 126°33'07.1"E
Speed (kt)			-250	-250						-220	-220
Altitude (ft)	+FL 160	@FL 150			+12 000	000 8+ 000 8+	000 8@	+7 000			+4 000
Turn direction	-									-	
Distance (NM)		23.4	8.6	6.1	14.0	13.6	9.9	5.2	5.0	0.9	3.0
Waypoint Fly- Course/Track Distance (NM)		051 (042.7)	052 (043.0)	000 (000.3)	313 (304.8)	292 (283.0)	302 (293.8)	298 (289.5)	287 (278.0)	324 (315.0)	054 (045.0)
Fly- over											
Waypoint Identifier	OLMEN	UPKIG	KAKSO	E90Na	SUPOM	SEL	DN030	DUDOT	DU022	81000	рокро
Serial Path Waypoint Number Descriptor Identifier	±I.	TF	TF	Ħ	¥	TF	Ŧ	TF	TF	TF	TF
Serial Number	100	002	003	004	900	900	200	800	600	010	011

Remarks	1			1						IAF
Navigation specification	RNAV 1	RNAV 1	RNAV 1	RNAV 1	RNAV 1	RNAV 1	RNAV 1	RNAV 1	RNAV 1	RNAV 1
VPA/ RDH						-				
Coordinates	37°01'10.9"N 127°38'22.6"E	37°10'14.9"N 127°33'04.6"E	37°13'49.2"N 127°26'39.5"E	37°21'46.7"N 127°12'17.2"E	37°24'49.0"N 126°55'42.1"E	37°27'28.2"N 126°48'09.4"E	37°29'12.0"N 126°42'00.0"E	37°29'53.6"N 126°35'48.1"E	37°34'09.7"N 126°30'26.7"E	37°36'17.1"N 126°33'07.1"E
Speed (kt)		-250	-250						-220	-220
Altitude (ft)	+FL 160	ı	1	+12 000	-9 000 -4 000	000 8@	+7 000	ı	1	+4 000
Turn direction	,								,	
		10.0	6.2	14.0	13.6	9.9	5.2	5.0	0.9	3.0
Course/Track °M(°T)		344 (334.9)	314 (304.9)	313 (304.8)	292 (283.0)	302 (293.8)	298 (289.5)	287 (278.0)	324 (315.0)	054 (045.0)
Fly- (										
Waypoint Identifier	GUKDO	69005	DU063	SUPOM	SEL	oeona	DUDOT	DN022	BU018	рокро
Path Descriptor	ш	Ŧ	Ŧ	#	1	TF	TF	TF	TF	TF
Serial Number	100	002	003	004	005	900	200	800	600	010
	Path Waypoint Fly- Course/Track Distance Turn Altitude Speed Coordinates VPA/ Navigation Descriptor Identifier over "M("T) (NM) direction (ft) (kt)	Waypoint Fly- Course/Track Distance Identifier over SM(3T)         Turn (INM)         Altitude (ft)         Speed (kt)         Coordinates         VPA/ RDH         Navigation specification           GUKDO         -         +FL 160         -         37°01'10.9"N 127°38'22.6"E         -         RNAV 1	Waypoint Fly- Course/Track Distance         Turn (INM)         Altitude (ft)         Speed (kt)         Coordinates         VPA/ RDH specification (RDH sp	Woaypoint Fly-Course/Track Distance         Turn (INM)         Altitude (ft)         Speed (ft)         Coordinates         VPA/ RDH         Navigation RDH           Identifier         over (NM)         - (NM)         - (H)         - (H)	Woaypoint Fly- Course/Track Distance Identifier over "M("T) (NM) direction Identifier over "M("T) (NM) direction (ft) (NM)         Turn (ft) (NM) (ft) (NM) direction (ft) (NM)         All (NM) (NM) (NM) (NM) (NM) (NM) (NM) (NM)	Woppoint Fly- Course/Track Distance Identifier         Turn Outse/Track Distance         Turn Outse/IT (MM)         Altitude (ft) (kt)         Speed Coordinates         Coordinates         VPA/Specification RDH         Navigation RDH           GUKDO         -         -         -         +FL 160         -         37°01'10.9"N 127°38'22.6"E         -         RNAV 1           GUKDO         -         -         -         -         -         -         RNAV 1           GUKDO         -         -         -         -         -         -         RNAV 1           GUKDO         -         -         -         -         -         -         RNAV 1           BUK         -         +         -         -         -         -         -         RNAV 1           SUPOM         -         313 (304.8)         13.6         -         +         +         - </td <td>Woaypoint Fly- Course/Track Distance Identifier over "M(°T)" (INM)         Turn (IH) (IMM)         Allitude (IH) (IMM)         Speed (IH) (IMM)         Coordinates (IH) (IMM)         Track (IH) (IMM)         Track (IMM)</td> <td>Woaypoint Fly- Course/Track Distance Identifier over "M(°T)" (INM)         Turn (ff)         Allitude (ff)         Speed (coordinates)         Coordinates         VPA/ specification (RDA)         Navigation (RDA)           GUKDO         -         -         -         +FL 160         -         37°01'10.9"N 127°38'22.6"E         -         RNAV 1           GUKDO         -         -         -         -         -         -         RNAV 1           GUKDO         -         -         -         -         -         -         RNAV 1           GUKDO         -         -         -         -         -         -         RNAV 1           BULO69         -         314 (334.9)         10.0         -         -         -         -         RNAV 1           SUPOM         -         313 (304.8)         14.0         -         +12 000         -         37°21'46.7"N 126°55'42.1"E         -         RNAV 1           SEL         -         -         -         -         -         -         -         RNAV 1           DU030         -         -         -         -         -         -         -         RNAV 1           SEL         -         -         -         -</td> <td>Woaypoint Fly- Course/Track Distance</td> <td>Woaypoint Fly- Course/Track Distance Ium Identifier over Speed (direction Identifier over "M("1) (NM) (NM) (H) (H) (H)         Tum (H) (H) (H) (NM) (H) (H) (NM) (IM) (IM) (IM) (IM) (IM) (IM) (IM) (I</td>	Woaypoint Fly- Course/Track Distance Identifier over "M(°T)" (INM)         Turn (IH) (IMM)         Allitude (IH) (IMM)         Speed (IH) (IMM)         Coordinates (IH) (IMM)         Track (IH) (IMM)         Track (IMM)	Woaypoint Fly- Course/Track Distance Identifier over "M(°T)" (INM)         Turn (ff)         Allitude (ff)         Speed (coordinates)         Coordinates         VPA/ specification (RDA)         Navigation (RDA)           GUKDO         -         -         -         +FL 160         -         37°01'10.9"N 127°38'22.6"E         -         RNAV 1           GUKDO         -         -         -         -         -         -         RNAV 1           GUKDO         -         -         -         -         -         -         RNAV 1           GUKDO         -         -         -         -         -         -         RNAV 1           BULO69         -         314 (334.9)         10.0         -         -         -         -         RNAV 1           SUPOM         -         313 (304.8)         14.0         -         +12 000         -         37°21'46.7"N 126°55'42.1"E         -         RNAV 1           SEL         -         -         -         -         -         -         -         RNAV 1           DU030         -         -         -         -         -         -         -         RNAV 1           SEL         -         -         -         -	Woaypoint Fly- Course/Track Distance	Woaypoint Fly- Course/Track Distance Ium Identifier over Speed (direction Identifier over "M("1) (NM) (NM) (H) (H) (H)         Tum (H) (H) (H) (NM) (H) (H) (NM) (IM) (IM) (IM) (IM) (IM) (IM) (IM) (I

Change : Information of waypoint names(DU066  $\rightarrow$  UPKIG, DU025  $\rightarrow$  DUDOT).

RNAV OLMEN 2U

SEOUL/Gimpo Intl(RKSS) RWY 14L/R RNAV KARBU 2U

### **AERONAUTICAL DATA TABULATION**

Standard Instrument Arrival Procedure Coding Tables

1											Н	
△	Path escriptor	Serial Path Waypoint Fly- Number Descriptor Identifier over	Fly- over	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
	느	KARBU			ı	1			37°31'59.0"N 127°39'52.0"E		RNAV 1	,
	Ľ	EGOBA		267 (258.7)	13.9		+13 000	-250	37°29'14.7"N 127°22'45.9"E		RNAV 1	
	¥	SEL		267 (258.5)	22.0	1	000 6- 000 8+		37°24'49.0"N 126°55'42.1"E		RNAV 1	
	Ľ	DU030		302 (293.8)	6.6		000 8@		37°27'28.2"N 126°48'09.4"E		RNAV 1	
	¥	DUDOT		298 (289.5)	5.2		+7 000		37°29'12.0"N 126°42'00.0"E		RNAV 1	
	Ħ	DU022		287 (278.0)	5.0	1	,		37°29'53.6"N 126°35'48.1"E		RNAV 1	
	¥	DU018		324 (315.0)	6.0		,	-220	37°34'09.7"N 126°30'26.7"E		RNAV 1	
	۴	рокро		054 (045.0)	3.0		+4 000	-220	37°36'17.1"N 126°33'07.1"E	,	RNAV 1	IAF
							-					

HOLDING PROCEDURE	焸											
Holding Identification	Path Descriptor	Waypoint Identifier	Fly- over	Path Waypoint Fly- Course/Track Descriptor Identifier over "M(°T)	Time (min)	Turn direction	Altitude Speed (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
		D0063	>	314 (304.9)	1.0	٦	-FL 150 +12 000	-230	37°13'49.2"N 127°26'39.5"E	·	RNAV 1	ı
RIVA V OLMEN 20		рокро	>	324 (314.9)	1.0	œ	-5 000 +4 000	-200	37°36'17.1"N 126°33'07.1"E		RNAV 1	
10 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		D0063	>	314 (304.9)	1.0	٦	-FL 150 +12 000	-230	37°13'49.2"N 127°26'39.5"E		RNAV 1	
DA OUNDO VAL		рокро	>	324 (314.9)	1.0	œ	-5 000 +4 000	-200	37°36'17.1"N 126°33'07.1"E		RNAV 1	,
2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2		EGOBA	>	267 (258.7)	1.5	œ	-FL 150 +13 000	-250	37°29'14.7"N 127°22'45.9"E		RNAV 1	1
		DOKDO	<b>&gt;</b>	324 (314.9)	1.0	ĸ	-5 000 +4 000	-200	37°36'17.1"N 126°33'07.1"E		RNAV 1	ı


Change : Information of waypoint name(DU025  $\rightarrow$  DUDOT).

**INTENTIONALLY** 

LEFT

**BLANK** 

AIRAC AIP AMDT 11/21 Effective : 1600UTC 3 NOV 2021

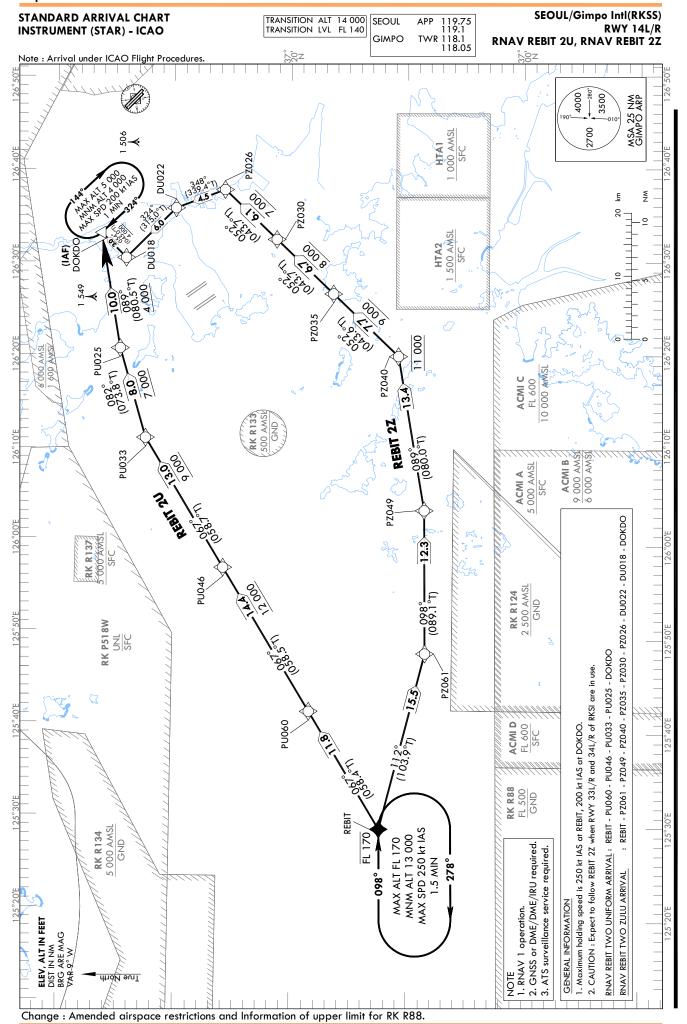

SEOUL/Gimpo Intl(RKSS) RWY 14L/R RNAV REBIT 2U, RNAV REBIT 2Z


### **AERONAUTICAL DATA TABULATION**

Tables
Coding
Procedure
Arrival
Instrument
Standard

Remarks	•			1		IAF
VPA/ Navigation RDH specification	RNAV 1					
VPA/ RDH				•		•
Coordinates	37°12'03.0"N 125°29'12.7"E	37°18'12.6"N 125°41'46.1"E	37°25'42.2"N 125°57'09.0"E	37°32'26.0"N 126°11'04.0"E	37°34'39.1"N 126°20'42.3"E	37°36'17.1"N 126°33'07.1"E
Speed (kt)						
Altitude (ft)	-FL 170		+12 000	000 6+	+7 000	+4 000
Turn Altitude Speed direction (ft)				-		-
, Track Distance (°T)		11.8	14.4	13.0	8.0	10.0
Course	1	067 (058.4)	- 067 (058.5)	067 (058.7)	082 (073.8)	089 (080.5)
Fly- over						
Path Waypoint Fly- Course,	REBIT	PU060	PU046	PU033	PU025	рокро
Serial Path Waypoint Fly-	ш	TF	11	ŦL	11	TF
Serial Po	100	002	003	004	900	900

NAM NEDI 22	77											
Serial Number	Serial Path Waypoint Fly- Number Descriptor Identifier over	Waypoint Fly- Course/ Identifier over	Fly- over	Course/T M(°T	rack Distance ) (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
100	ш	REBIT			,	1	-FL 170		37°12'03.0"N 125°29'12.7"E		RNAV 1	
005	#	PZ061		112 (103.9)	15.5				37°08'17.9"N 125°48'04.6"E		RNAV 1	
003	Ħ	PZ049		098 (089.1)	12.3				37°08'28.1"N 126°03'25.2"E		RNAV 1	
004	ΤF	PZ040		(0.080) 680	13.4		@11 000		37°10'46.2"N 126°19'55.9"E	1	RNAV 1	,
900	¥	PZ035		052 (043.6)	7.7		000 6+		37°16'22.3"N 126°26'36.8"E		RNAV 1	
900	1T	PZ030		052 (043.7)	2.9		000 8+		37°21'14.9"N 126°32'26.8"E		RNAV 1	
200	1	PZ026		052 (043.7)	6.1		000 Z+		37°25'41.7"N 126°37'46.9"E		RNAV 1	
800	¥	DU022		348 (339.4)	4.5	ı			37°29'53.6"N 126°35'48.1"E		RNAV 1	
600	TF	81000		324 (315.0)	0.9	•		-220	37°34'09.7"N 126°30'26.7"E	1	RNAV 1	
010	¥	рокро		054 (045.0)	3.0	ı	+4 000	-220	37°36'17.1"N 126°33'07.1"E		RNAV 1	IAF

HOLDING PROCEDURE	RE											
Holding Identification	Path Descriptor	Path Waypoint Fly Descriptor Identifier ove	Fly- over	iy- Course/Track Time	Time (min)	Turn direction	Turn Altitude Speed direction (ft) (kt)	Speed (kt)	Coordinates	VPA/ RDH	VPA/ Navigation RDH specification	Remarks
DNAV BERIT 311		REBIT	>	098 (089.1)	1.5	æ	-FL 170 +13 000	-250	37°12'03.0"N 125°29'12.7"E		RNAV 1	
KINA V REBIL 20		рокро	>	324 (314.9)	1.0	œ	-5 000 +4 000	-200	37°36'17.1"N 126°33'07.1"E		RNAV 1	
TC FIGSE VAINE		REBIT	>	098 (089.1)	1.5	œ	-FL 170 +13 000	-250	37°12'03.0"N 125°29'12.7"E		RNAV 1	
VIVA NEBII 22		рокро	>	324 (314.9)	1.0	~	-5 000 +4 000	-200	37°36'17.1"N 126°33'07.1"E	,	RNAV 1	

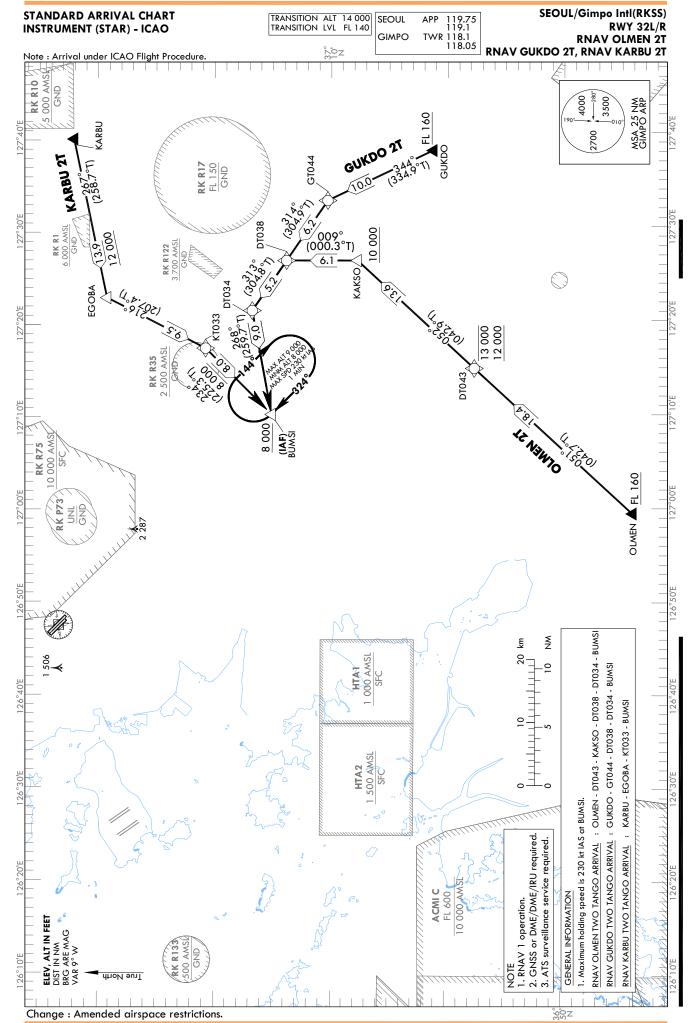

SEOUL/Gimpo Intl(RKSS) RWY 32L/R RNAV OLMEN 2T RNAV GUKDO 2T, RNAV KARBU 2T

### **AERONAUTICAL DATA TABULATION**


## Standard Instrument Arrival Procedure Coding Tables

Remarks			Bank angle 25 $^\circ$	Bank angle 25°	Bank angle 25°	IAF
VPA/ Navigation RDH specification	RNAV 1					
VPA/ RDH			-			
Coordinates	36°44'13.4"N 126°59'27.6"E	36°57'45.7"N 127°15'01.2"E	37°07'44.6"N 127°26'37.4"E	37°13'49.2"N 127°26'39.5"E	37°16'47.4"N 127°21'18.3"E	37°15'10.2"N 127°10'09.6"E
Speed (kt)			-250	-250	-250	
Altitude (ft)	+FL 160	-13 000 +12 000	+10 000			+8 000
Turn direction						
Distance (NM)	-	18.4	13.6	6.1	5.2	0.6
Serial Path Waypoint Fly- Course/Track Distance Turn Number Descriptor Identifier over "M("T) (NM) direction	ı	051 (042.7)	052 (042.9)	009 (000.3)	313 (304.8)	268 (259.7)
Fly- over						
Waypoint Identifier	OLMEN	DT043	KAKSO	DT038	DT034	BUMSI
Path Descriptor	۳	TF	1L	#	¥	¥
Serial Path Number Descrip	100	002	003	004	900	900

Remarks	1		1		IAF
Navigation specification	RNAV 1	RNAV 1	RNAV 1	RNAV 1	RNAV 1
VPA/ RDH					
Coordinates	37°01'10.9"N 127°38'22.9"E	37°10'14.9"N 127°33'04.6"E	37°13'49.2"N 127°26'39.5"E	37°16'47.4"N 127°21'18.3"E	37°15'10.2"N 127°10'09.6"E
Speed (kt)		-250	-250	-250	
Altitude (ft)	+FL 160	ı	ı		+8 000
Turn direction				-	
Distance (NM)		10.0	6.2	5.2	9.0
Course/Track °M(°T)		344 (334.9)	314 (304.9)	313 (304.8)	268 (259.7)
Fly- over					
Waypoint Identifier	GUKDO	GT044	DT038	DT034	BUMSI
Path Descriptor	¥	¥	1	Ŧ	TF
Serial Number	100	002	003	004	005
	VPA/ Navigation RDH specification	ack Distance (NM)         Turn direction         Altitude (ft)         Speed (kt)         Coordinates         VPA/ RDH         Navigation specification           -         +FL 160         -         37°01'10.9"N 127"38'22.9"E         -         RNAV 1	ack Distance (NM)         Turn direction (NM)         Altitude (ft)         Speed (kt)         Coordinates         VPA/ RDH specification RDH specification           + FL 160         -         37°01'10.9"N 127°38'22.9"E         -         RNAV 1           9 10.0         -         -250         37°10'14.9"N 127°33'04.6"E         -         RNAV 1	ack Distance (NM)         Turn direction (H)         Altitude (H)         Speed (R)         Coordinates         VPA/ RDH specification RDH specification           -         -         +FL 160         -         37°01'10.9"N 127°38'22.9"E         -         RNAV 1           .9         10.0         -         -250         37°10'14.9"N 127°33'04.6"E         -         RNAV 1           .9         6.2         -         -250         37°13'49.2"N 127°26'39.5"E         -         RNAV 1	Path Descriptor         Waypoint Indemtifier over Jrack Distance Index Jrack Distance Ind

			l									
Serial	Path Descriptor	Waypoint Identifier	Hy- over	Serial Path Waypoint Hy-Course, Lack Distance Turn Alfitude Speed Number Descriptor Identifier over "M("T) (NM) direction (ff) (k1)	Distance (NM)	lurn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	VPA/ Navigation RDH specification	Remarks
100	ш	KARBU		,		•	ı	ı	37°31'59.0"N 127°39'52.0"E		RNAV 1	•
002	TF	EGOBA		- 267 (258.7)	13.9		+12 000	-250	37°29'14.7"N 127°22'45.9"E		RNAV 1	
003	TF	KT033		- 216 (207.4)	9.5		,	-250	37°20'48.4"N 127°17'17.1"E		RNAV 1	•
004	TF	BUMSI		- 234 (225.3)	8.0	ı	+8 000		37°15'10.2"N 127°10'09.6"E		RNAV 1	IAF

HOLDING PROCEDURE	SE.												
Holding Identification	Path Waypoin Descriptor Identifier	Waypoint Identifier	Fly- over	sint Fly- Course/Track Time ier over (min)	Time (min)	Turn direction	Turn Altitude Speed direction (ft) (kt)	Speed (kt)	Coordinates	VPA/ RDH	VPA/ Navigation RDH specification	Remarks	
RNAV OLMEN 2T	¥	BUMSI	>-	Y 324 (315.2) 1.0	1.0	2	000 8+	-230	37°15'10.2"N 127°10'09.6"E		RNAV 1		
RNAV GUKDO 2T	WH	BUMSI	<b>&gt;</b>	324 (315.2)	1.0	В	000 8+ 000 6-	-230	37°15'10.2"N 127°10'09.6"E	-	RNAV 1		
RNAV KARBU 2T	¥	BUMSI	>	324 (315.2) 1.0	1.0	2	000 6-	-230	37°15'10.2"N 127°10'09.6"E		RNAV 1		

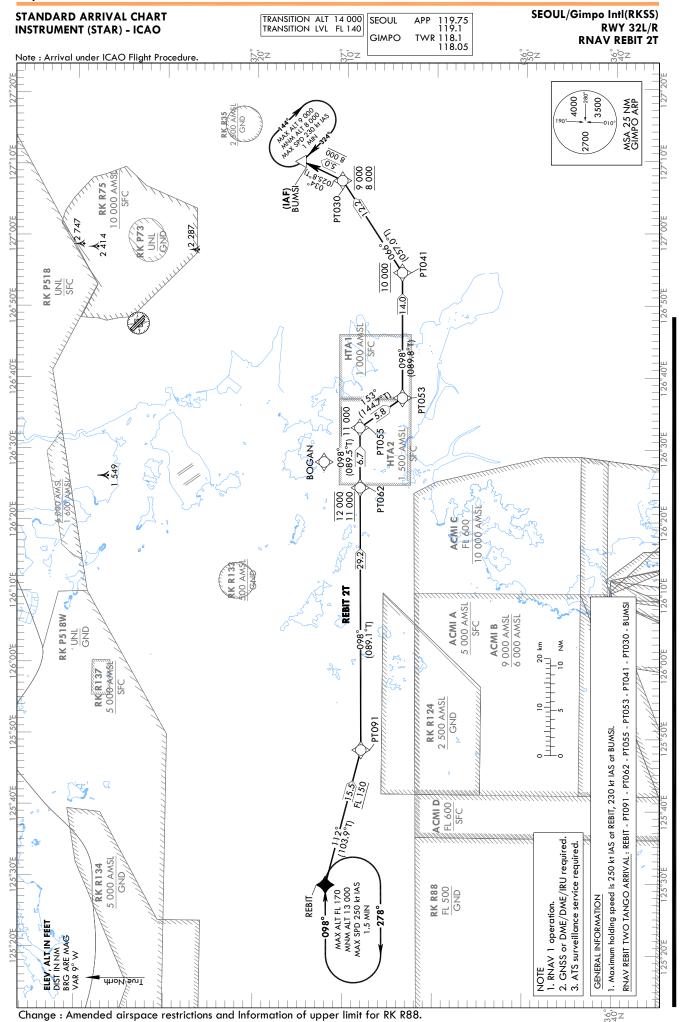

SEOUL/Gimpo Intl(RKSS) RWY 32L/R RNAV REBIT 2T


### **AERONAUTICAL DATA TABULATION**

Standard Instrument Arrival Procedure Coding Tables

Remarks	•	1	1					IAF
Navigation specification	RNAV 1							
VPA/ RDH						•		
Coordinates	37°12'03.0"N 125°29'12.7"E	37°08'17.9"N 125°48'04.6"E	37°08'38.9"N 126°24'37.4"E	37°08'42.1"N 126°32'59.3"E	37°03'58.4"N 126°37'09.6"E	37°04'00.5"N 126°54'36.0"E	37°10'39.8"N 127°07'26.2"E	37°15'10.2"N 127°10'09.6"E
Speed (kt)								
Altitude (ft)	-	+FL 150	-12 000 +11 000	-11 000	-	@10 000	000 8+ 000 8+	+8 000
Turn direction	-			-	-	-	-	-
Distance (NM)	-	15.5	29.2	6.7	5.8	14.0	12.2	5.0
Course/Track Distance °M(°T) (NM)	-	112 (103.9)	098 (089.1)	098 (089.5)	153 (144.7)	098 (089.8)	066 (057.0)	034 (025.8)
Fly- over				,				
Waypoint Fly- Identifier over	REBIT	PT091	PT062	PT055	PT053	PT041	PT030	BUMSI
Path Jescripto	F	#	11	TF	TF	TF	TF	TF
Serial Number	100	002	003	004	900	900	200	800

HOLDING PROCEDURE	SE.											
Holding Identification	Path Descriptor	Vaypoint dentifier	Fly- over	Fly- Course/Track over ^M(°T)	Time (min)	Turn direction	Altitude Speed (kt)	Speed (kt)	Coordinates	VPA/ RDH	VPA/ Navigation RDH specification	Remarks
TC TIMEN Y NAVA	WH	REBIT	>	098 (089.1)	1.5	æ	-FL 170 +13 000	-250	37°12'03.0"N 125°29'12.7"E		RNAV 1	,
NAME OF THE PERSON OF THE PERS	WH	BUMSI	Y	324 (315.2)	1.0	æ	000 8+ 000 6-	-230	37°15'10.2"N 127°10'09.6"E		RNAV 1	

RNAV REBIT 2T

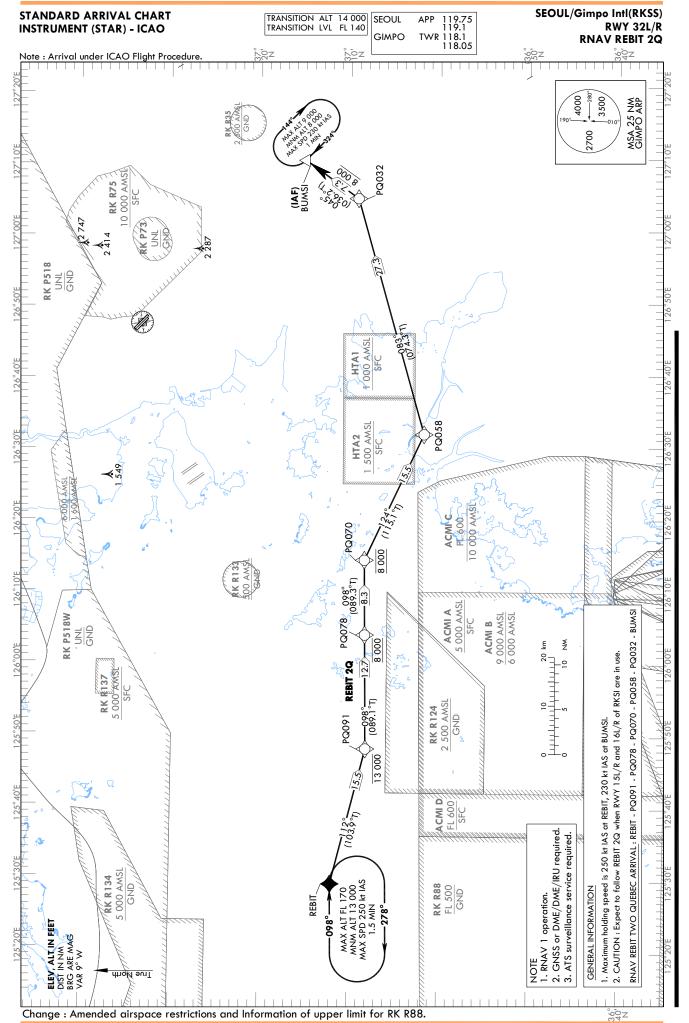

SEOUL/Gimpo Intl(RKSS) RWY 32L/R RNAV REBIT 2Q


### **AERONAUTICAL DATA TABULATION**

# Standard Instrument Arrival Procedure Coding Tables

Remarks	•		•				IAF
VPA/ Navigation RDH specification	RNAV 1						
VPA/ RDH				,	•		
Coordinates	37°12'03.0"N 125°29'12.7"E	37°08'17.9"N 125°48'04.6"E	37°08'28.4"N 126°03'57.4"E	37°08'34.2"N 126°14'23.0"E	37°01'58.7"N 126°31'54.3"E	37°09'17.5"N 127°04'47.1"E	37°15'10.2"N 127°10'09.6"E
Speed (kt)							
Altitude (ft)		-13 000	000 8@	000 8@			+8 000
Turn direction			-	ı			
Distance (NM)		1 5.5	12.7	8.3	1 5.5	27.3	7.3
Serial Path Waypoint Fly- Course/Track Distance Turn Altitude Speed Number Descriptor Identifier over "M(°T) (NM) direction (ft) (kt)		112 (103.9) 15.5	098 (089.1)	098 (089.3)	124 (115.1) 15.5	083 (074.3)	045 (036.2)
Fly- over			-	,			
Waypoint Identifier	REBIT	PQ091	PQ078	PQ070	PQ058	PQ032	BUMSI
Path Descriptor	¥	11	11	1	11	¥	¥
Serial Number	100	002	003	004	900	900	200

HOLDING PROCEDUR	3E											
Holding Identification	Path Descriptor	Waypoint Identifier	Fly-	Fly- Course/Track Time over ^0M(^T) (min)	Time (min)	Turn direction	Turn Altitude Speed direction (ft) (kt)	Speed (kt)	Coordinates	VPA/ RDH	VPA/ Navigation RDH specification	Remarks
DNIAV BERIT 20	WH	REBIT	>	098 (089.1)	1.5	œ	-FL 170 +13 000	-250	37°12'03.0"N 125°29'12.7"E		RNAV 1	
NIZA NEBI Z	WH	ISWN8	<b>\</b>	324 (315.2)	1.0	~	000 8+	-230	37°15'10.2"N 127°10'09.6"E	-	RNAV 1	

RNAV REBIT 2Q

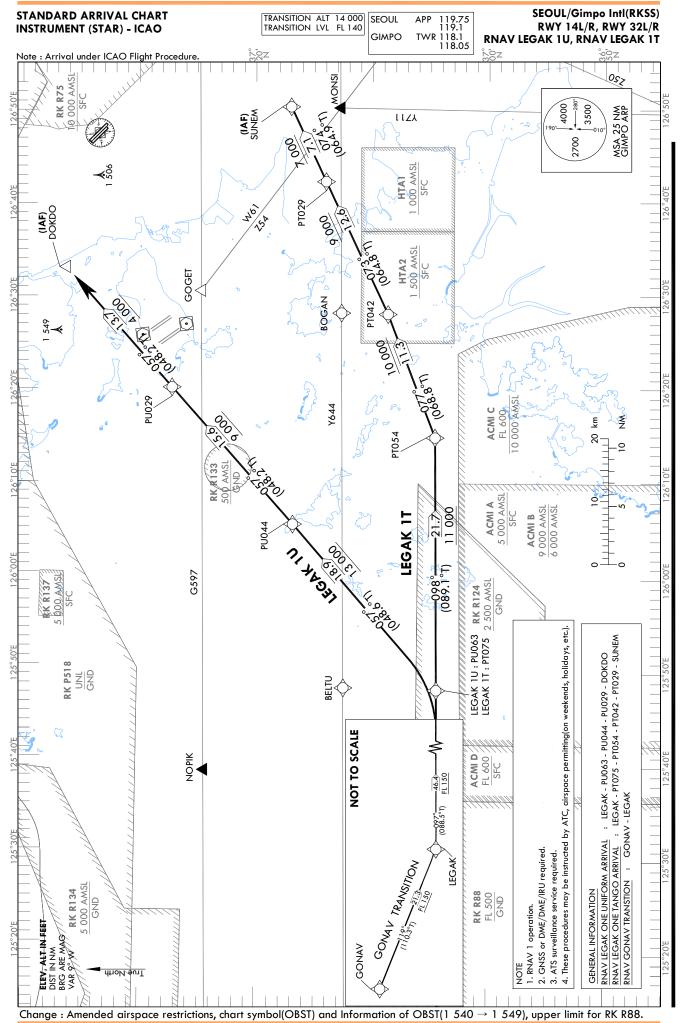

SEOUL/Gimpo Intl(RKSS) RWY 14L/R, RWY 32L/R RNAV LEGAK 1U, RNAV LEGAK 1T RNAV GONAV TRANSITION

### **AERONAUTICAL DATA TABULATION**

## Standard Instrument Arrival Procedure Coding Tables

RNAV LEGAK 1U	4K 1U											
Serial Number	Serial Path Waypoint Fly- Course/ Number Descriptor Identifier over "M(	Waypoint Identifier	Fly- over	Course/Track °M(°T)	Distance (NM)	Turn direction	(°T) (NM) direction (ft) (kt)	Speed (kt)	Coordinates	VPA/ RDH	VPA/ Navigation RDH specification	Remarks
100	IF	LEGAK	,			1	+FL 150	,	37°03′21.0″N 124°49′51.1″E		RNAV 1	1
002	TF.	PU063		097 (088.5) 46.4	46.4	ı	+FL 150		37°04'17.6"N 125°47'50.3"E		RNAV 1	
003	TF.	PU044		057 (048.6) 18.9	18.9	ı	+13 000		37°16'44.9"N 126°05'33.1"E		RNAV 1	•
004	TF	PU029	,	- 057 (048.2) 15.6	15.6		000 6+		37°27'10.1"N 126°20'12.3"E		RNAV 1	•
900	TF	рокро	_	- 057 (048.4) 13.7	13.7		+4 000		37°36'17.1"N 126°33'07.1"E		RNAV 1	IAF

Ö	RNAV LEGAK 1T											
- ja	Path Descriptor	Waypoint Identifier	Fly- over	Serial Path Waypoint FIy- Course/Track Distance Turn Altitude Speed Number Descriptor Identifier over $^{\circ}$ M( $^{\circ}$ T) (NM) direction (ft) (kt)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	VPA/ Navigation RDH specification	Remarks
100	≝	LEGAK		-	-	-	+FL 150		37°03'21.0"N 124°49'51.1"E		RNAV 1	
002	¥	PT075	'	097 (088.5)	46.4		+FL 150		37°0417.6"N 125°47'50.3"E		RNAV 1	
003	¥	PT054		- 098 (089.1)	21.7	ı	+11 000		37°04'34.8"N 126°14'54.2"E		RNAV 1	
004	Ŧ	PT042		- 077 (068.8)	11.3		+10 000		37°08'40.3"N 126°28'06.7"E		RNAV 1	
900	ŦĿ	PT029	٠	. 073 (064.8)	12.6	-	000 6+		37°14'00.7"N 126°42'19.8"E		RNAV 1	
900	¥	SUNEM		- 074 (064.9)	7.1	ı	+7 000		37°17'00.6"N 126°50'21.9"E		RNAV 1	IAF

Serial Path Waypoint Fly-Course/Track Distance Turn Altitude Speed tumber Descriptor Identifier over "M("T) (NM) direction (ff) (kt)	Track Distance Turn Altitud  T) (NM) direction (ft)	Distance Turn Altitude Spee (NM) direction (ft) (kt)	Turn Altitude Speedirection (ft)	Altitude Spee	Spee (kt)	<b>D</b> _	Coordinates	VPA/ RDH	VPA/ Navigation RDH specification	Remarks
		1					37°10'48.4"N 124°24'52.6"E		RNAV 1	
- 119 (110.3) 21.3 -	21.3				+FL 150		37°03'21.0"N 124°49'51.1"E		RNAV 1	