

STANDARD DEPARTURE CHART
INSTRUMENT(SID) - ICAO


TRANSITION ALT 14 000
TRANSITION LVL FL 140

JEJU DEP 119.225
121.2
JEJU TWR 118.2
118.55

JEJU/Jeju Intl(RKPC)

RWY 07
RNAV AKPON 1E, RNAV TAMNA 2E
RNAV PANSI 2E, RNAV LIMDI 1E

Note : Departure under ICAO Flight Procedures.

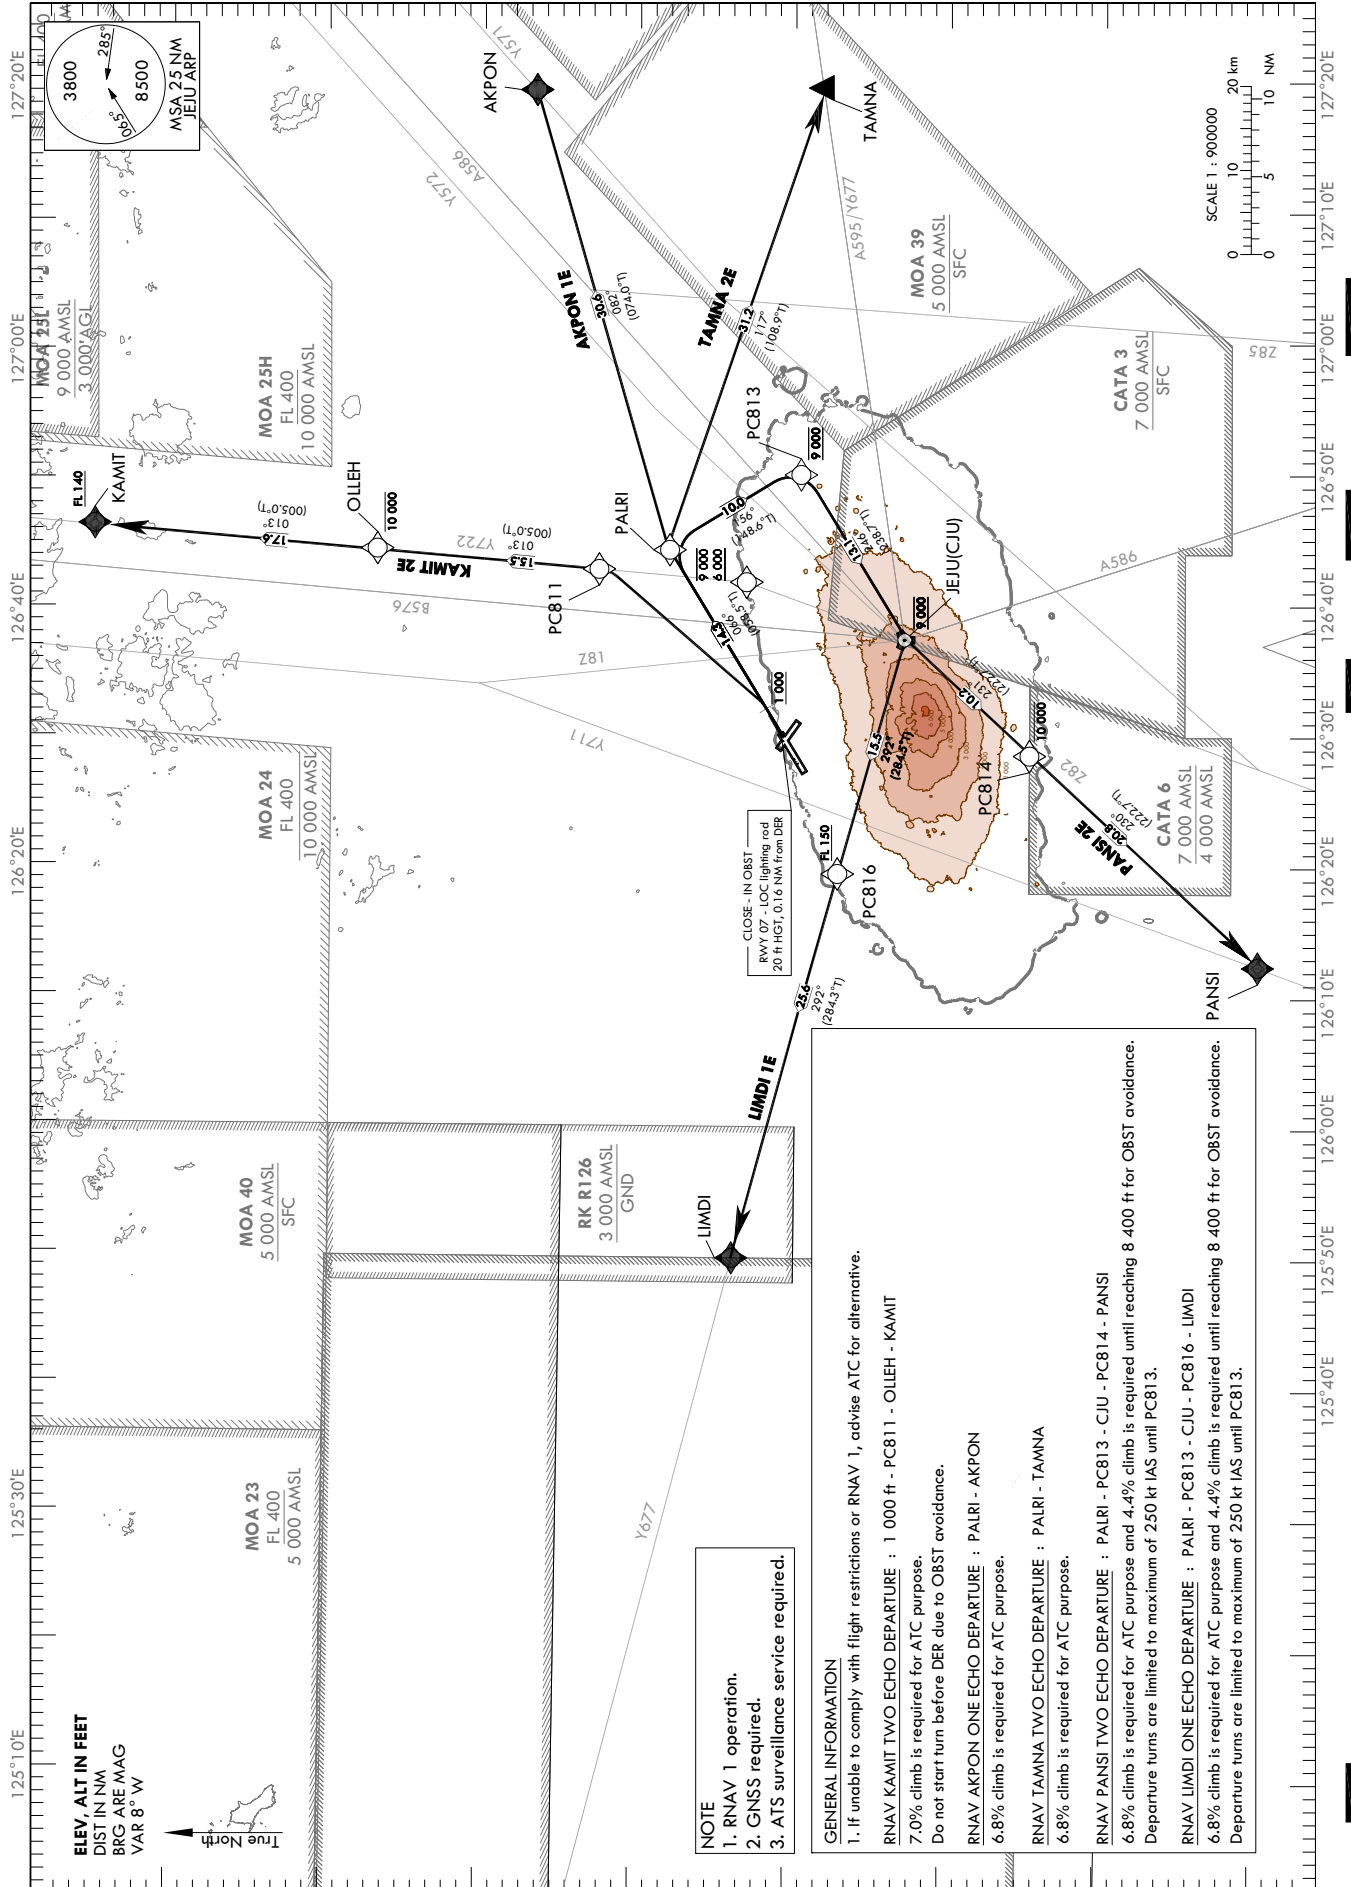

Change : Information of MAG VAR(7° W → 8° W) and course/track.

JEJU/Jeju Intl(RKPC)
RWY 07

RNAV KAMIT 2E

RNAV AKPON 1E, RNAV TAMNA 2E

RNAV PANSI 2E, RNAV LIMDI 1E

AERONAUTICAL DATA TABULATION

Standard Instrument Departure Procedure Coding Tables

RNAV KAMIT 2E

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/RDH	Navigation specification	Remarks
001	CA	-	-	066(058.5)	-	-	@1 000	-	-	-	RNAV 1	-
002	DF	PC811	-	-	-	L	-	-	33°42'12.1"N 126°42'48.8"E	-	RNAV 1	-
003	TF	OLLEH	-	013(005.0)	15.5	-	-10 000	-	33°57'42.2"N 126°44'26.5"E	-	RNAV 1	-
004	TF	KAMIT	-	013(005.0)	17.6	-	+FL 140	-	34°15'14.1"N 126°46'17.7"E	-	RNAV 1	-

RNAV AKPON 1E

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/RDH	Navigation specification	Remarks
001	CF	PALRI	-	066(058.5)	14.3	-	-9 000 +6 000	-	33°38'27.2"N 126°44'37.4"E	-	RNAV 1	-
002	TF	AKPON	-	082(074.0)	30.6	-	-	-	33°46'49.6"N 127°19'53.0"E	-	RNAV 1	-

RNAV TAMNA 2E

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/RDH	Navigation specification	Remarks
001	CF	PALRI	-	066(058.5)	14.3	-	-9 000 +6 000	-	33°38'27.2"N 126°44'37.4"E	-	RNAV 1	-
002	TF	TAMNA	-	117(108.9)	31.2	-	-	-	33°28'15.5"N 127°19'53.0"E	-	RNAV 1	-

RNAV PANSI 2E

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/RDH	Navigation specification	Remarks
001	CF	PALRI	-	066(058.5)	14.3	-	-	-250	33°38'27.2"N 126°44'37.4"E	-	RNAV 1	-
002	TF	PC813	-	156(148.6)	10.0	-	@9 000	-250	33°29'55.5"N 126°50'50.0"E	-	RNAV 1	-
003	TF	CJU	-	246(238.7)	13.1	-	@9 000	-	33°23'04.6"N 126°37'26.8"E	-	RNAV 1	-
004	TF	PC814	-	231(222.8)	10.2	-	-10 000	-	33°15'36.4"N 126°29'13.5"E	-	RNAV 1	-
005	TF	PANSI	-	230(222.7)	20.8	-	-	-	33°00'14.4"N 126°12'25.1"E	-	RNAV 1	-

RNAV LIMDI 1E

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/RDH	Navigation specification	Remarks
001	CF	PALRI	-	066(058.5)	14.3	-	-	-250	33°38'27.2"N 126°44'37.4"E	-	RNAV 1	-
002	TF	PC813	-	156(148.6)	10.0	-	@9 000	-250	33°29'55.5"N 126°50'50.0"E	-	RNAV 1	-
003	TF	CJU	-	246(238.7)	13.1	-	@9 000	-	33°23'04.6"N 126°37'26.8"E	-	RNAV 1	-
004	TF	PC816	-	292(284.5)	15.5	-	+FL 150	-	33°26'56.5"N 126°19'30.8"E	-	RNAV 1	-
005	TF	LIMDI	-	292(284.3)	25.6	-	-	-	33°33'13.3"N 125°49'53.0"E	-	RNAV 1	-

Change : Information of course/track.


**STANDARD DEPARTURE CHART
INSTRUMENT(SID) - ICAO**

TRANSITION ALT 14 000
TRANSITION LVL FL 140

JEJU DEP 119.225
121.2
JEJU TWR 118.2
118.55

JEJU/Jeju Intl(RKPC)
RWY 07
IPDAS 4K, MAKET 4K
TAMNA 2K, CJU 5K

Note : Departure under ICAO Flight Procedures.

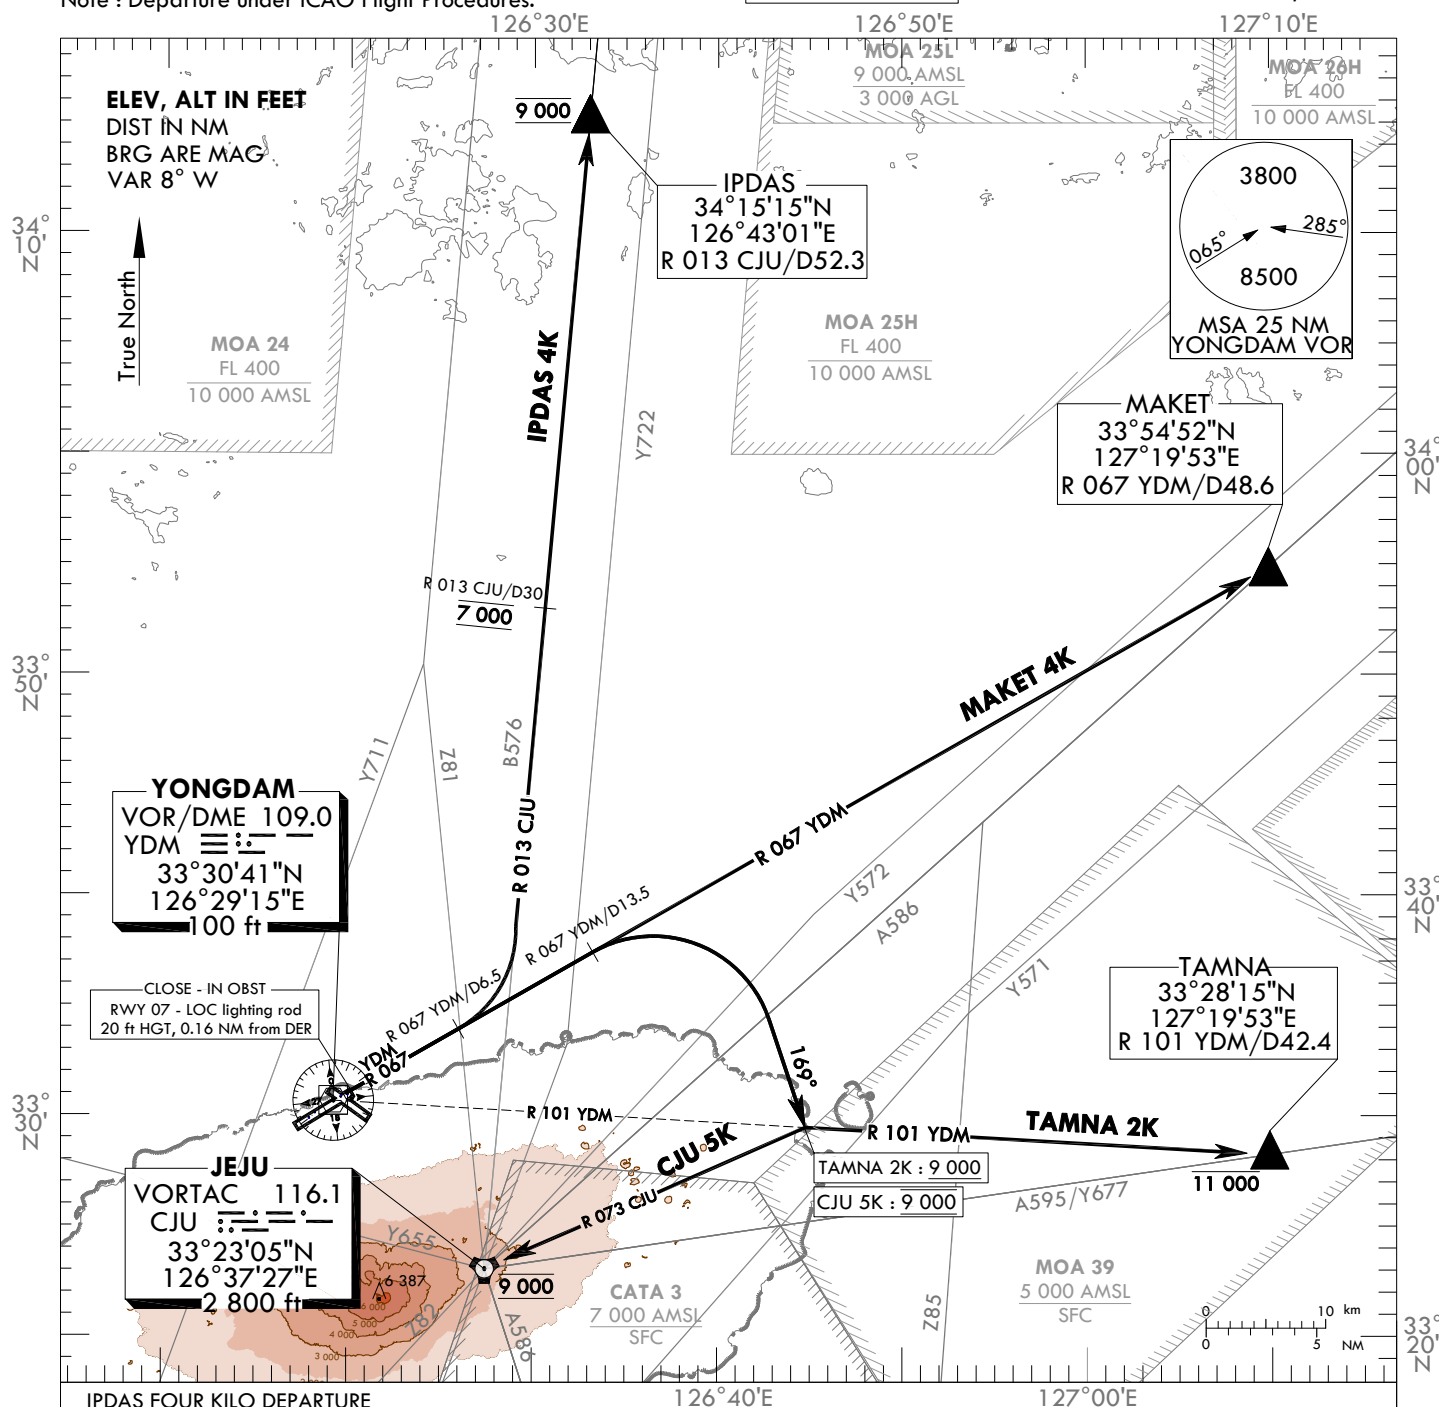

IPDAS FOUR KILO DEPARTURE

Climb on R 067 YDM until D6.5, then turn Left to intercept R 013 CJU then proceed direct to IPDAS.

* Minimum 4.9% CG is required for ATC purpose.

* Cross R 013 CJU/D30.0 at 7 000 ft and Cross IPDAS at 9 000 ft unless otherwise directed by ATC.

MAKET FOUR KILO DEPARTURE

Climb on R 067 YDM, then proceed direct to MAKET.

* Minimum 4.9% CG is required for ATC purpose.

TAMNA TWO KILO DEPARTURE

Climb on R 067 YDM until D13.5, then turn Right HDG 169° to intercept R 101 YDM then proceed direct to TAMNA.

* Minimum 5.4% CG is required for ATC purpose.

* Maintain at or above 9 000 ft before intercepting R 101 YDM and Cross TAMNA at or below 11 000 ft unless otherwise directed by ATC.

JEJU FIVE KILO DEPARTURE

Climb on R 067 YDM until D13.5, then turn Right HDG 169° to intercept R 073 CJU, then proceed direct to CJU.

* Minimum 5.4% CG is required for ATC purpose.

* Maintain at 9 000 ft before intercepting R 073 CJU and Cross JEJU VORTAC at 9 000 ft unless otherwise directed by ATC.

Change : Information of MAG VAR(7° W → 8° W) and standard instrument departure procedures for RWY 07.

INTENTIONALLY

LEFT

BLANK

STANDARD DEPARTURE CHART
INSTRUMENT(SID) - ICAO


TRANSITION ALT 14 000
TRANSITION LVL FL 140

JEJU DEP 119.225
121.2
JEJU TWR 118.2
118.55

JEJU/Jeju Intl(RKPC)

RWY 25
RNAV KAMIT 1W, RNAV IPDAS 1W
RNAV AKPON 1W, RNAV TAMNA 3W
RNAV PANSI 2W, RNAV LIMDI 1W

Note : Departure under ICAO Flight Procedures.

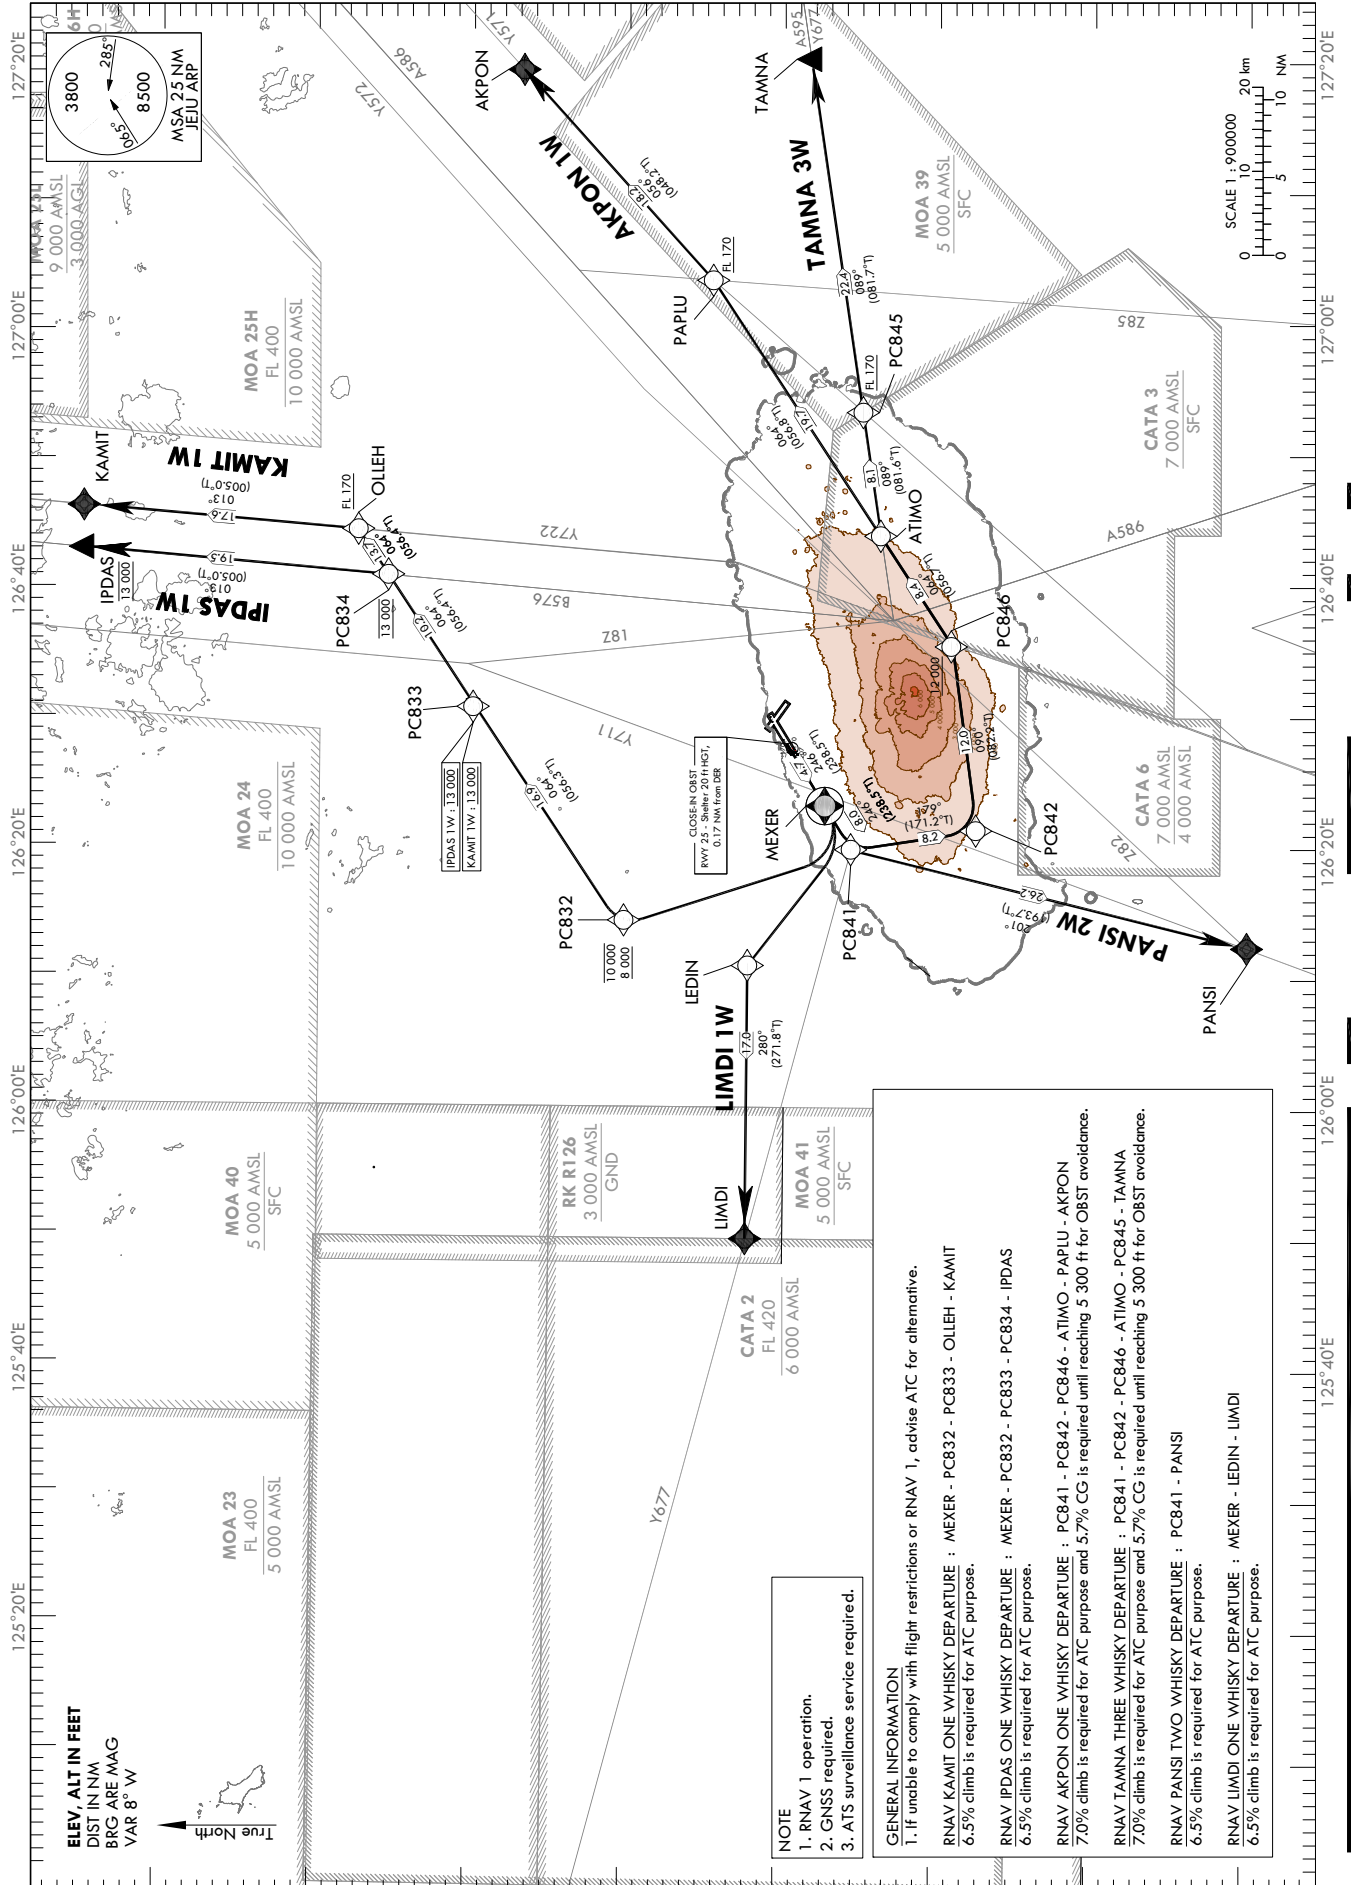

Change : Information of MAG VAR(7° W → 8° W) and standard instrument departure procedure for RWY 25.

JEJU/Jeju Intl(RKPC)

RWY 25

RNAV KAMIT 1W, RNAV IPDAS 1W

RNAV AKPON 1W

AERONAUTICAL DATA TABULATION

Standard Instrument Departure Procedure Coding Tables

RNAV KAMIT 1W

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/RDH	Navigation specification	Remarks
001	CF	MEXER	Y	246(238.5)	4.7	-	-	-250	33°27'28.0"N 126°23'12.0"E	-	RNAV 1	-
002	DF	PC832	-	-	-	R	-10 000 +8 000	-250	33°40'46.0"N 126°13'51.9"E	-	RNAV 1	-
003	TF	PC833	-	064(056.3)	16.9	-	+13 000	-	33°50'08.8"N 126°30'44.8"E	-	RNAV 1	-
004	TF	OLLEH	-	064(056.4)	13.7	-	+FL 170	-	33°57'42.2"N 126°44'26.5"E	-	RNAV 1	-
005	TF	KAMIT	-	013(005.0)	17.6	-	-	-	34°15'14.1"N 126°46'17.7"E	-	RNAV 1	-

RNAV IPDAS 1W

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/RDH	Navigation specification	Remarks
001	CF	MEXER	Y	246(238.5)	4.7	-	-	-250	33°27'28.0"N 126°23'12.0"E	-	RNAV 1	-
002	DF	PC832	-	-	-	R	-10 000 +8 000	-250	33°40'46.0"N 126°13'51.9"E	-	RNAV 1	-
003	TF	PC833	-	064(056.3)	16.9	-	@13 000	-	33°50'08.8"N 126°30'44.8"E	-	RNAV 1	-
004	TF	PC834	-	064(056.4)	10.2	-	@13 000	-	33°55'46.2"N 126°40'55.7"E	-	RNAV 1	-
005	TF	IPDAS	-	013(005.0)	19.5	-	@13 000	-	34°15'14.7"N 126°43'01.4"E	-	RNAV 1	-

RNAV AKPON 1W

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/RDH	Navigation specification	Remarks
001	CF	PC841	-	246(238.5)	8.0	-	-	-	33°25'42.7"N 126°19'47.8"E	-	RNAV 1	-
002	TF	PC842	-	179(171.2)	8.2	-	-	-	33°17'38.3"N 126°21'17.3"E	-	RNAV 1	-
003	TF	PC846	-	090(082.2)	12.0	-	+12 000	-	33°19'15.6"N 126°35'28.6"E	-	RNAV 1	-
004	TF	ATIMO	-	064(056.7)	8.4	-	-	-	33°23'52.5"N 126°43'51.2"E	-	RNAV 1	-
005	TF	PAPLU	-	064(056.8)	19.7	-	+FL 170	-	33°34'41.3"N 127°03'36.5"E	-	RNAV 1	-
006	TF	AKPON	-	056(048.2)	18.2	-	-	-	33°46'49.6"N 127°19'53.0"E	-	RNAV 1	-

Change : Information of course/track.

JEJU/Jeju Intl(RKPC)
RWY 25

RNAV TAMNA 3W

RNAV PANSI 2W, RNAV LIMDI 1W

AERONAUTICAL DATA TABULATION

Standard Instrument Departure Procedure Coding Tables

RNAV TAMNA 3W

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	PC841	-	246(238.5)	8.0	-	-	-	33°25'42.7"N 126°19'47.8"E	-	RNAV 1	-
002	TF	PC842	-	179(171.2)	8.2	-	-	-	33°17'38.3"N 126°21'17.3"E	-	RNAV 1	-
003	TF	PC846	-	090(082.2)	12.0	-	+12 000	-	33°19'15.6"N 126°35'28.6"E	-	RNAV 1	-
004	TF	ATIMO	-	064(056.7)	8.4	-	-	-	33°23'52.5"N 126°43'51.2"E	-	RNAV 1	-
005	TF	PC845	-	089(081.6)	8.1	-	+FL 170	-	33°25'03.2"N 126°53'24.0"E	-	RNAV 1	-
006	TF	TAMNA	-	089(081.7)	22.4	-	-	-	33°28'15.5"N 127°19'53.0"E	-	RNAV 1	-

RNAV PANSI 2W

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	PC841	-	246(238.5)	8.0	-	-	-	33°25'42.7"N 126°19'47.8"E	-	RNAV 1	-
002	TF	PANSI	-	201(193.7)	26.2	-	-	-	33°00'14.4"N 126°12'25.1"E	-	RNAV 1	-

RNAV LIMDI 1W

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	MEXER	Y	246(238.5)	4.7	-	-	-	33°27'28.0"N 126°23'12.0"E	-	RNAV 1	-
002	DF	LEDIN	-	-	-	R	-	-	33°32'42.1"N 126°10'14.9"E	-	RNAV 1	-
003	TF	LIMDI	-	280(271.8)	17.0	-	-	-	33°33'13.3"N 125°49'53.0"E	-	RNAV 1	-

Change : Information of course/track.


INTENTIONALLY

LEFT

BLANK

**JEJU/Jeju Intl(RKPC)
RWY 25
CJU 3L, IPDAS 1L**

Note : Departure under ICAO Flight Procedures.

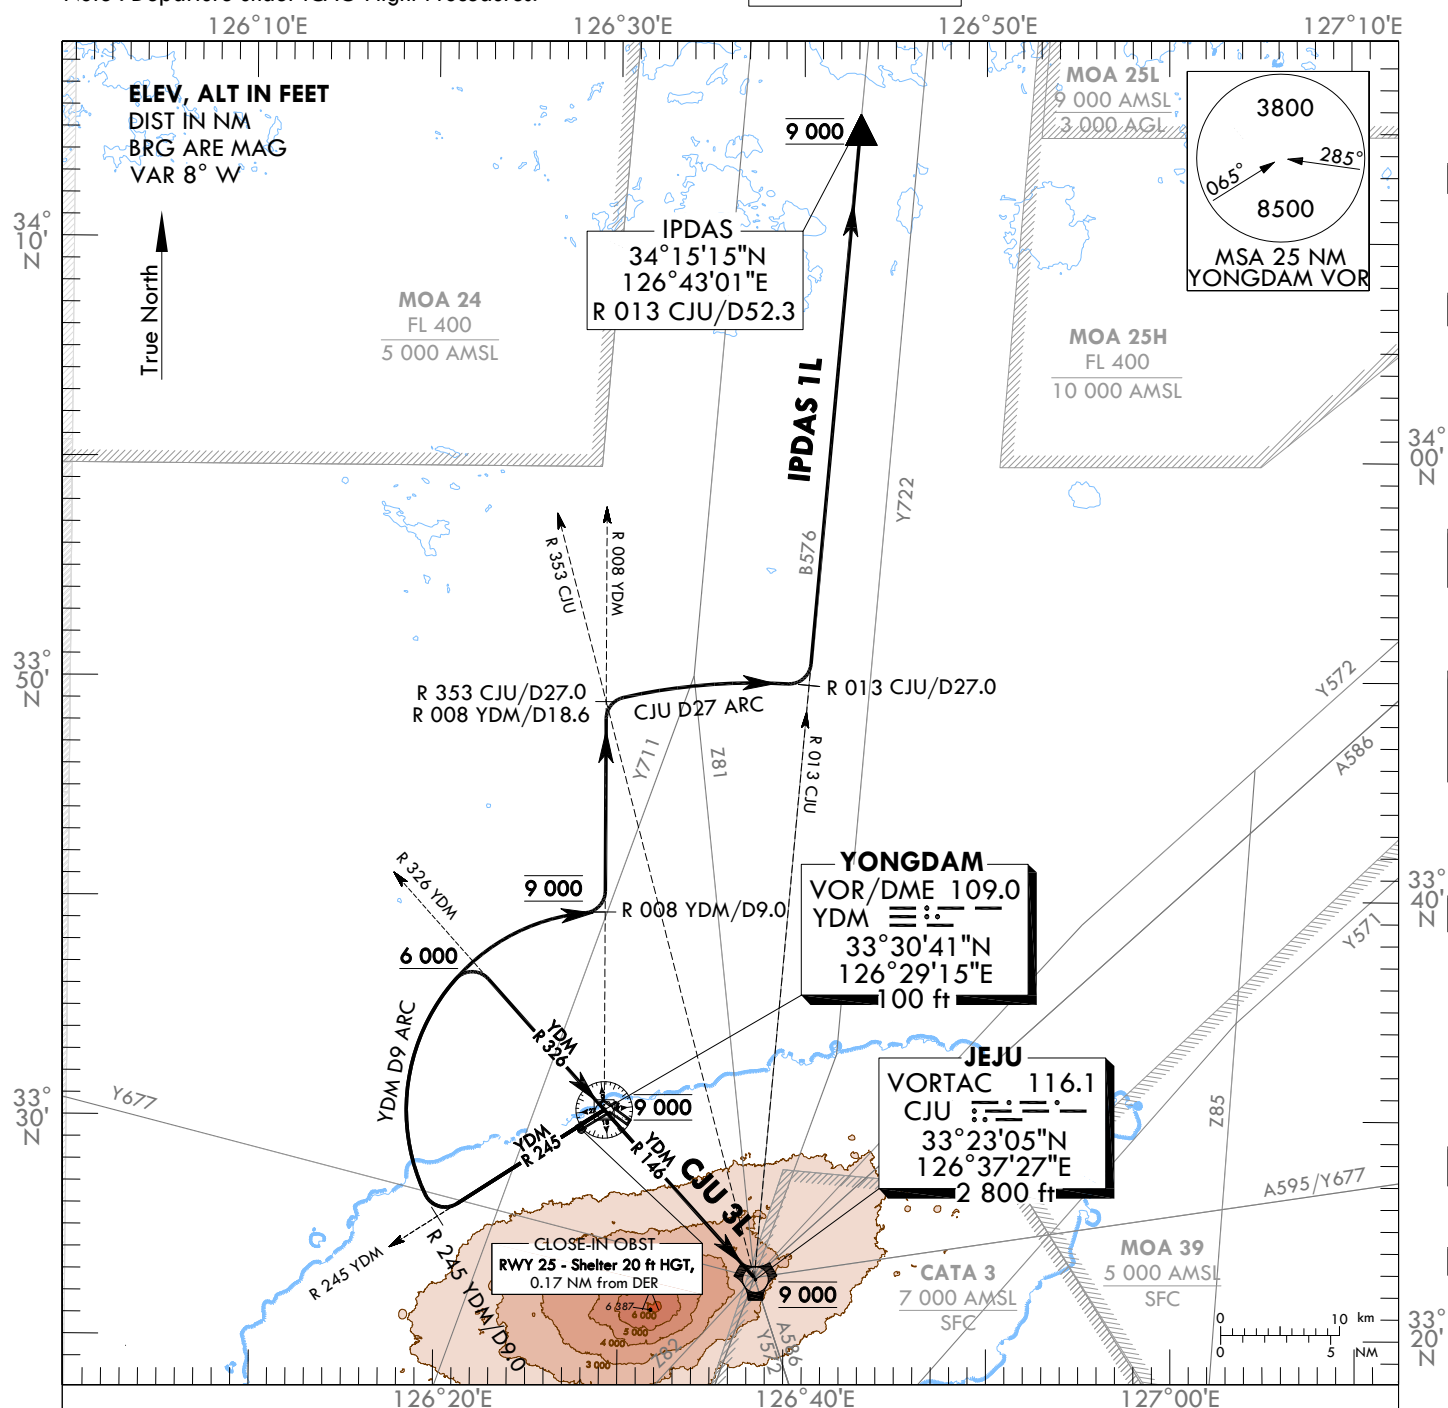

* Cross R 326 YDM at or above 6 000 ft , then Cross R 008 YDM/D9.0 at 9 000 ft and maintain 9 000 ft unless otherwise directed by ATC.

AIRAC AIP AMDT 6/25
Effective : 1600UTC 9 JUL 2025

INTENTIONALLY

LEFT

BLANK

JEJU/Jeju Intl(RKPC)
RWY 31
RNAV KAMIT 2N
RNAV AKPON 1N

ELEV. ALT IN FEET
DIST IN NM
BRG ARE MAG
VAR 8° W

True North

MOA 24
FL 400
10 000 AMSL

MOA 25H
FL 400
10 000 AMSL

MOA 25L
9 000 AMSL
3 000 AGL

MOA 39
5 000 AMSL
SFC

MOA 41
5 000 AMSL
SFC

AKPON 1N

KAMIT 2N
FL 160

TOREN

AKPON

PC871
5 000

PC872
8 000

PC874

PC877

PC881

PC886

PC891

PC896

PC901

PC906

PC911

PC916

PC921

PC926

PC931

PC936

PC941

PC946

PC951

PC956

PC961

PC966

PC971

PC976

PC981

PC986

PC991

PC996

PC1001

PC1006

PC1011

PC1016

PC1021

PC1026

PC1031

PC1036

PC1041

PC1046

PC1051

PC1056

PC1061

PC1066

PC1071

PC1076

PC1081

PC1086

PC1091

PC1096

PC1101

PC1106

PC1111

PC1116

PC1121

PC1126

PC1131

PC1136

PC1141

PC1146

PC1151

PC1156

PC1161

PC1166

PC1171

PC1176

PC1181

PC1186

PC1191

PC1196

PC1201

PC1206

PC1211

PC1216

PC1221

PC1226

PC1231

PC1236

PC1241

PC1246

PC1251

PC1256

PC1261

PC1266

PC1271

PC1276

PC1281

PC1286

PC1291

PC1296

PC1301

PC1306

PC1311

PC1316

PC1321

PC1326

PC1331

PC1336

PC1341

PC1346

PC1351

PC1356

PC1361

PC1366

PC1371

PC1376

PC1381

PC1386

PC1391

PC1396

PC1401

PC1406

PC1411

PC1416

PC1421

PC1426

PC1431

PC1436

PC1441

PC1446

PC1451

PC1456

PC1461

PC1466

PC1471

PC1476

PC1481

PC1486

PC1491

PC1496

PC1501

PC1506

PC1511

PC1516

PC1521

PC1526

PC1531

PC1536

PC1541

PC1546

PC1551

PC1556

PC1561

PC1566

PC1571

PC1576

PC1581

PC1586

PC1591

PC1596

PC1601

PC1606

PC1611

PC1616

PC1621

PC1626

PC1631

PC1636

PC1641

PC1646

PC1651

PC1656

PC1661

PC1666

PC1671

PC1676

PC1681

PC1686

PC1691

PC1696

PC1701

PC1706

PC1711

PC1716

PC1721

PC1726

PC1731

PC1736

PC1741

PC1746

PC1751

PC1756

PC1761

PC1766

PC1771

PC1776

PC1781

PC1786

PC1791

PC1796

PC1801

PC1806

PC1811

PC1816

PC1821

PC1826

PC1831

PC1836

PC1841

PC1846

PC1851

PC1856

PC1861

PC1866

PC1871

PC1876

PC1881

PC1886

PC1891

PC1896

PC1901

PC1906

PC1911

PC1916

PC1921

PC1926

PC1931

PC1936

PC1941

PC1946

PC1951

PC1956

PC1961

PC1966

PC1971

PC1976

PC1981

PC1986

PC1991

PC1996

PC2001

PC2006

PC2011

PC2016

PC2021

PC2026

PC2031

PC2036

PC2041

PC2046

PC2051

Change : Information of MAG VAR(7° W → 8° W), course/track and OBST.

JEJU/Jeju Intl(RKPC)
RWY 31

RNAV KAMIT 2N, RNAV AKPON 1N

AERONAUTICAL DATA TABULATION

Standard Instrument Departure Procedure Coding Tables

RNAV KAMIT 2N

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	PC861	-	313(305.6)	4.7	-	-	-	33°33'43.8"N 126°24'34.1"E	-	RNAV 1	-
002	TF	PC871	-	007(359.7)	5.3	-	-5 000	-	33°39'05.3"N 126°24'32.0"E	-	RNAV 1	-
003	TF	PC872	-	061(053.5)	7.0	-	-8 000	-	33°43'16.9"N 126°31'18.7"E	-	RNAV 1	-
004	TF	TOREN	-	061(053.5)	9.0	-	+11 000	-	33°48'36.8"N 126°39'57.7"E	-	RNAV 1	-
005	TF	OLLEH	-	030(022.3)	9.8	-	-12 000	-	33°57'42.2"N 126°44'26.5"E	-	RNAV 1	-
006	TF	KAMIT	-	013(005.0)	17.6	-	-FL 160	-	34°15'14.1"N 126°46'17.7"E	-	RNAV 1	-

RNAV AKPON 1N

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	PC861	-	313(305.6)	4.7	-	-	-	33°33'43.8"N 126°24'34.1"E	-	RNAV 1	-
002	TF	PC871	-	007(359.7)	5.3	-	-5 000	-	33°39'05.3"N 126°24'32.0"E	-	RNAV 1	-
003	TF	PC872	-	061(053.5)	7.0	-	-8 000	-	33°43'16.9"N 126°31'18.7"E	-	RNAV 1	-
004	TF	TOREN	-	061(053.5)	9.0	-	+11 000	-	33°48'36.8"N 126°39'57.7"E	-	RNAV 1	-
005	TF	PC874	-	098(089.8)	26.0	-	-	-	33°48'38.0"N 127°11'08.8"E	-	RNAV 1	-
006	TF	AKPON	-	112(103.9)	7.5	-	-	-	33°46'49.6"N 127°19'53.0"E	-	RNAV 1	-

Change : Information of course/track.

**STANDARD DEPARTURE CHART
INSTRUMENT(SID) - ICAO**

TRANSITION ALT 14 000
TRANSITION LVL FL 140


JEJU DEP 119.225
121.2
JEJU TWR 118.2
118.55

JEJU/Jeju Intl(RKPC)
RWY 07 RADAR 2E
RWY 25 RADAR 3W
RWY 31 RADAR 1N

Note : Departure under ICAO Flight Procedures.

126°30'E

126°40'E

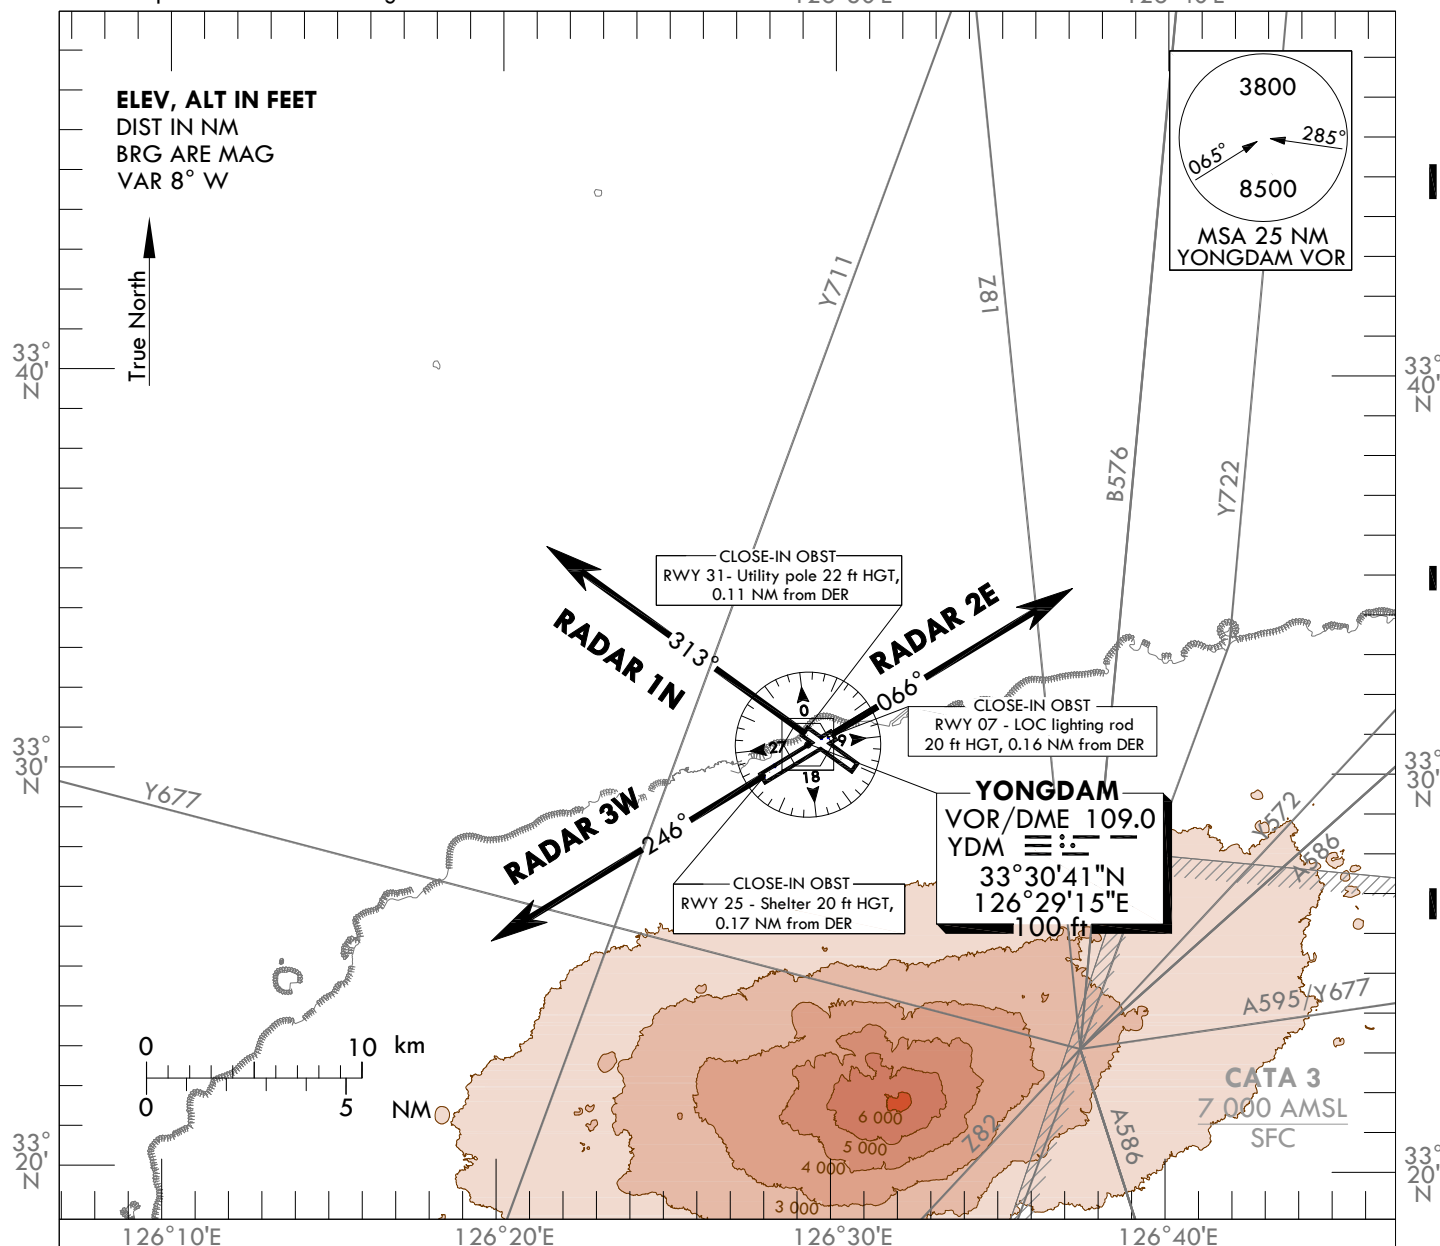

RADAR TWO ECHO DEPARTURE

TAKE OFF RWY 07 : Climb on RWY HDG until reaching 2 200 ft for RADAR VECTOR.

* Minimum 4.5% CG is required until 2 200 ft for ATC purpose.

RADAR THREE WHISKEY DEPARTURE

TAKE OFF RWY 25 : Climb on RWY HDG until reaching 3 000 ft for RADAR VECTOR.

* Minimum 3.7% CG is required until 1 400 ft for OBST avoidance.

RADAR ONE NOVEMBER DEPARTURE

TAKE OFF RWY 31 : Climb on RWY HDG until reaching 2 200 ft for RADAR VECTOR.

* Minimum 4.5% CG is required until 2 200 ft for ATC purpose.

NOTE : These procedures are available only for aircraft that don't satisfy RNAV 1 navigation specification.

Change : Information of MAG VAR(7° W → 8° W) and OBST.

INTENTIONALLY

LEFT

BLANK