

AERODROME GROUND
MOVEMENT CHART - ICAO

APRON ELEV 6 m

TWR	118.2(E)	118.8(W)
GND	121.75(E)	121.7(W)
APRON	121.65	122.175
	121.8	123.325
		129.725

SEOUL / Incheon Intl
RWY 15L/R, 33L/R DEPARTURE


ELEVATIONS AND DIMENSION IN METERS
BEARINGS ARE MAGNETIC



ANNUAL RATE OF CHANGE
2' W

LEGEND	
	VOR check-point and frequency
	Stop-bar light
	Holding position
	Taxi lane
	Gate
	Remote stand
	Taxi routes
	De-icing pad taxi routes
	Powered taxi-start point
	Transfer of control point(TCP)
	Open channel
	Hot spot
	ATC service boundary (Maneuvering area)
	Remote Passenger Boarding Bridge (501, 503, 512, 514)
	Ice shedding point

Note
All aeroplane will taxi at speeds of more than 10 kt on Taxiways A, B, C, D, M, N or P to ensure smooth traffic flow unless there is exceptional direction concerning safety factors by ATC. And if it is impracticable, pilots shall notify to ATC.



HS 1	CAUTION: RUNWAY INCURSION RISK Do not cross the holding marking for RWY 33L/15R on TWY K or J without ATC clearance. (RWY 33L/15R in use for departure and RWY 33R/15L in use for arrival)
HS 2	CAUTION: POSSIBLE TRAFFIC CONFLICT - Do not proceed taxiing beyond transfer of control points without clearance from INCHEON APRON or GROUND(TOWER). - Runway exit via TWY E after landing on RWY 33R/15L is available only when specifically authorized by ATC before landing.
HS 3	CAUTION: POSSIBLE TRAFFIC CONFLICT - Aircraft vacating RWY 33R/15L to TWY C after landing use caution: C4 and C5 are not available when aircraft is on TWY C-E heading to East. - Runway exit via TWY E after landing on RWY 33R/15L is available only when specifically authorized by ATC.
HS 4	CAUTION: POSSIBLE TRAFFIC CONFLICT Aircraft moving on taxiway R1, R4, R5 and R6 must maintain a safe separation distance with aircraft on A4 or M5. CAUTION: POSSIBLE TAXIWAY CONFUSION Do not proceed taxiing beyond transfer of control points without clearance from INCHEON APRON or GROUND(TOWER).
HS 5	CAUTION: POSSIBLE TAXIWAY CONFUSION Taxilanes RW and RE are not compliant with code D/E/F aircraft. CAUTION: VEHICLE TRAFFIC IN GSE ROADS INTERSECTION AREAS(RE-R1, RW-R4)

Note 1
When non-standard taxi routes are applicable, Incheon APRON will issue transition taxi instructions one to another taxilane in APRON 2, APRON 3, APRON 4 and Cargo APRONS.

Note 2
Aircraft shall not taxi into maneuvering area without clearance from Incheon Tower or Ground.

CAUTION
Taxilane RE & RW can only be used by Code C aircraft or smaller(maximum wingspan 36 m).

		SURFACE	WIDTH	STRENGTH
A P R O N	Apron 1, Cargo Apron 1, Maintenance Apron 1	Concrete	-	PCR 1 300/R/B/X/T
	Apron 2, Cargo Apron 2			PCR 1 160/R/B/X/T
	Maintenance Apron 2			PCR 1 050/R/B/X/T
	Apron 3			PCR 1 400/R/B/X/T
	Apron 4			PCR 1 510/R/B/X/T
TWY A, D		Concrete	30 m	PCR 1 300/R/B/X/T
TWY B, C		Asphalt	Shoulder : 15 m - Paved : 12 m - Turfed : 3 m	PCR 1 610/F/B/X/T
TWY M		Concrete	30 m	PCR 1 160/R/B/X/T
TWY N		Asphalt	Shoulder : 15 m - Paved : 15 m	PCR 1 290/F/B/X/T
TWY P		Asphalt		PCR 1 370/F/B/X/T

Taxiway edge lights on all taxiways curve area
Taxiway center line lights on all taxiways
PAX Terminal and Concourse A VDGS equipped


Change : Information of stop-bar lights.

AERODROME GROUND
MOVEMENT CHART - ICAO

APRON ELEV 6 m

TWR	118.2(E)	118.8(W)
GND	121.75(E)	121.7(W)
APRON	121.65	122.175
	121.8	123.325
		129.725

RKSI AD CHART 2 - 7
30 APR 2026
SEOUL / Incheon Intl
RWY 15L/R, 33L/R ARRIVAL

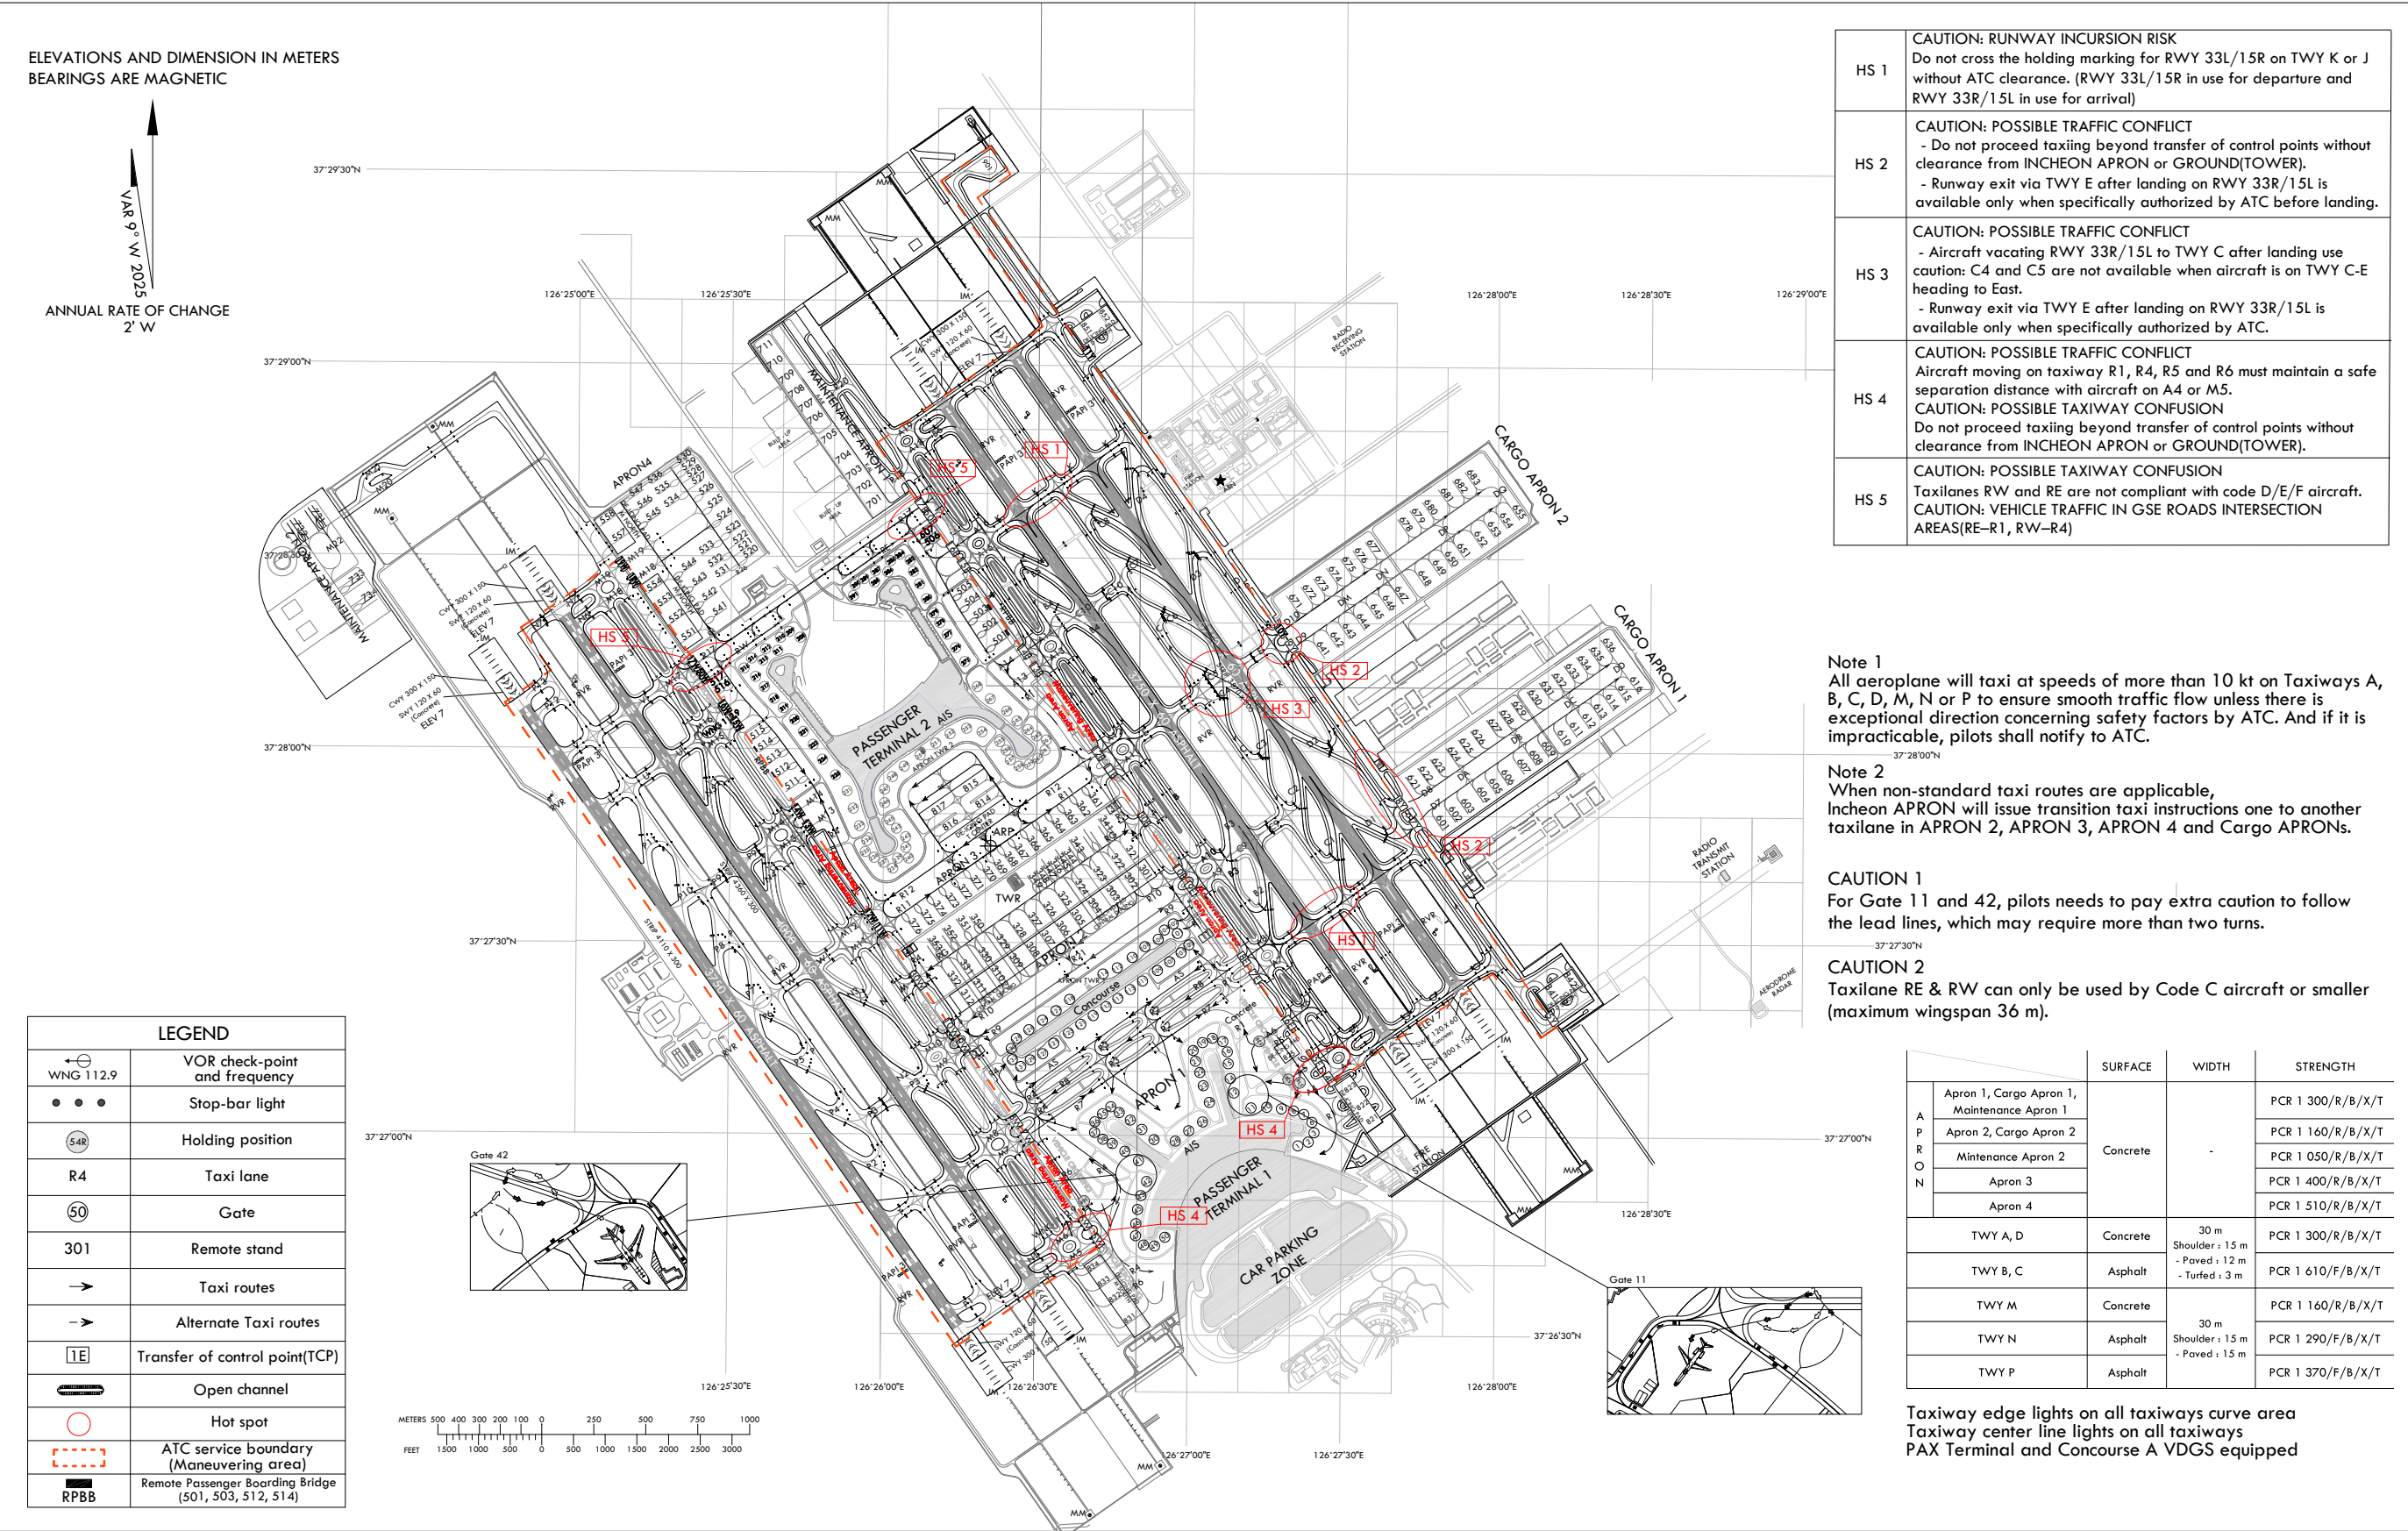


Change : Information of stop-bar lights.

AERODROME GROUND
MOVEMENT CHART - ICAO

APRON ELEV 6 m

TWR	118.2(E)	118.8(W)
GND	121.75(E)	121.7(W)
APRON	121.65	122.175
	121.8	123.325
		129.725

RKSI AD CHART 2 - 8
30 APR 2026
SEOUL / Incheon Intl
RWY 16L/R, 34L/R DEPARTURE

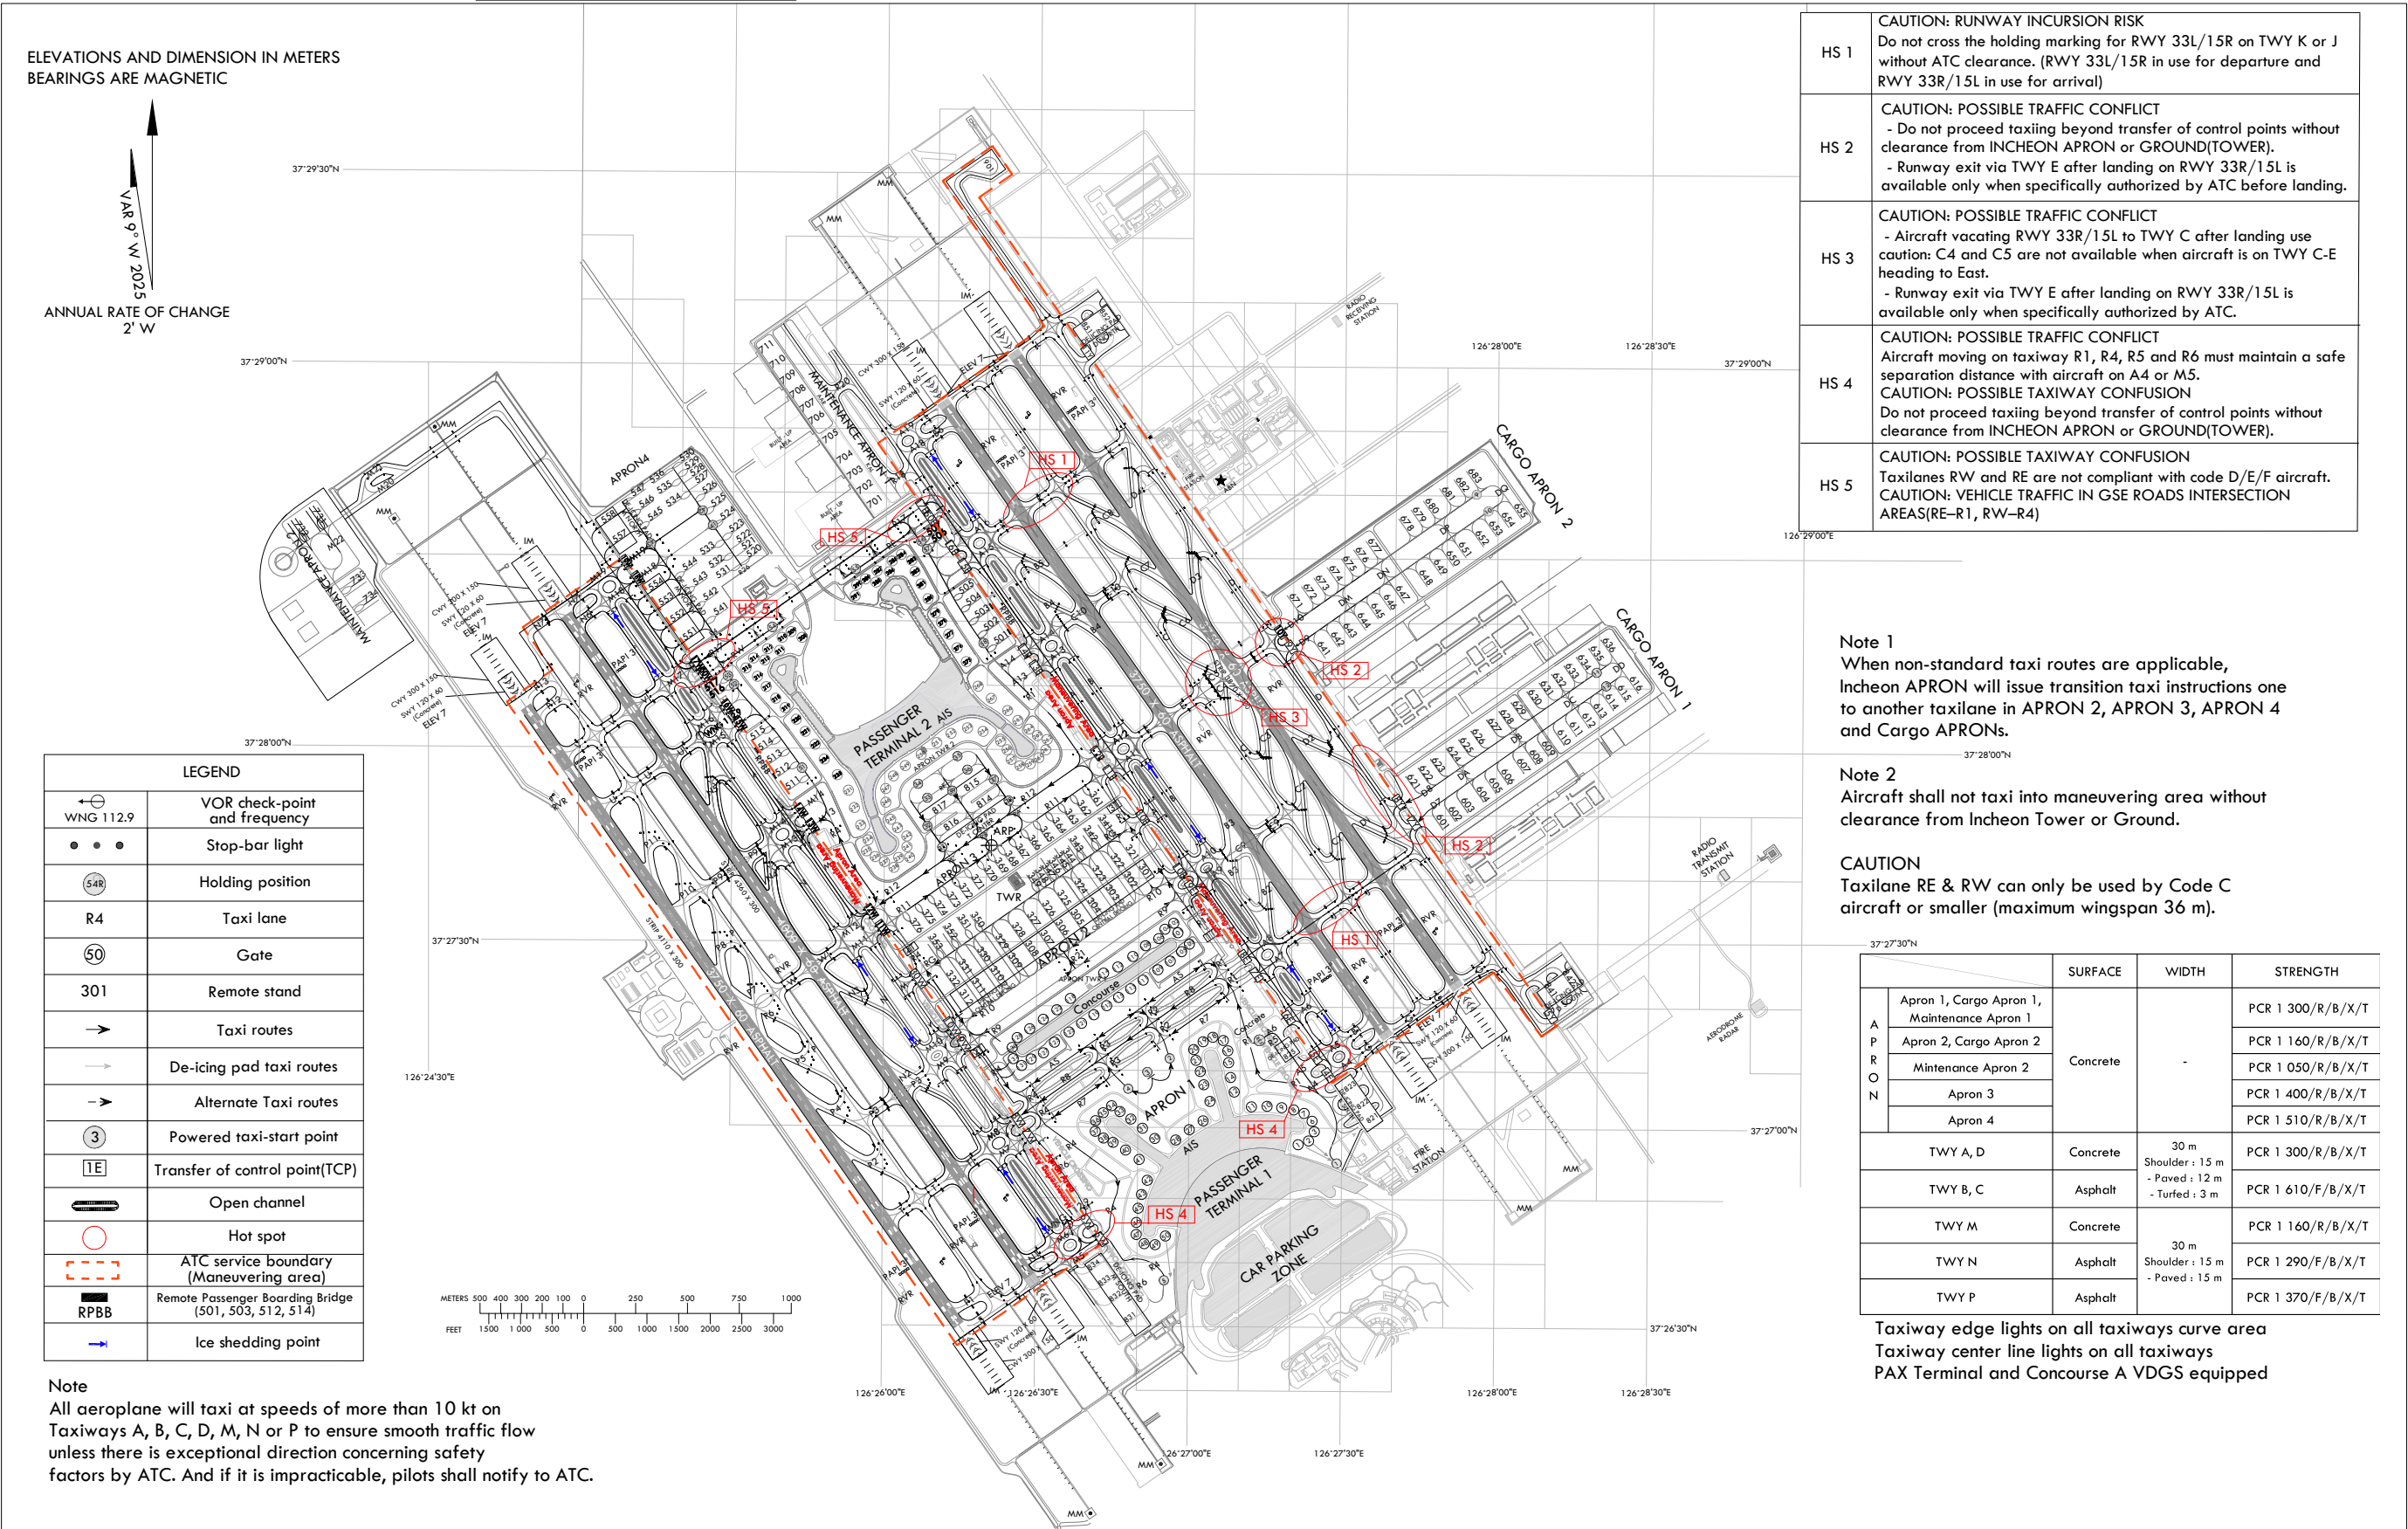

Change : Information of stop-bar lights.

AERODROME GROUND
MOVEMENT CHART - ICAO

APRON ELEV 6 m

TWR	118.2(E)	118.8(W)
GND	121.75(E)	121.7(W)
APRON	121.65	122.175
	121.8	123.325
		129.725

RKSI AD CHART 2 - 9
30 APR 2026
SEOUL / Incheon Intl
RWY 16L/R, 34L/R ARRIVAL

