
STANDARD DEPARTURE CHART INSTRUMENT (SID) - ICAO

TRANSITION ALT 14 000
TRANSITION LVL FL 140

JEJU DEP 119.225
121.2
JEJU TWR 118.2
118.55

Note : Departure under ICAO Flight Procedures.

JEJU/Jeju Intl(RKPC)
RWY 07
RNAV KAMIT 2E
RNAV AKPON 1E, RNAV TAMNA 2E
RNAV PANSI 2E, RNAV LIMDI 1E

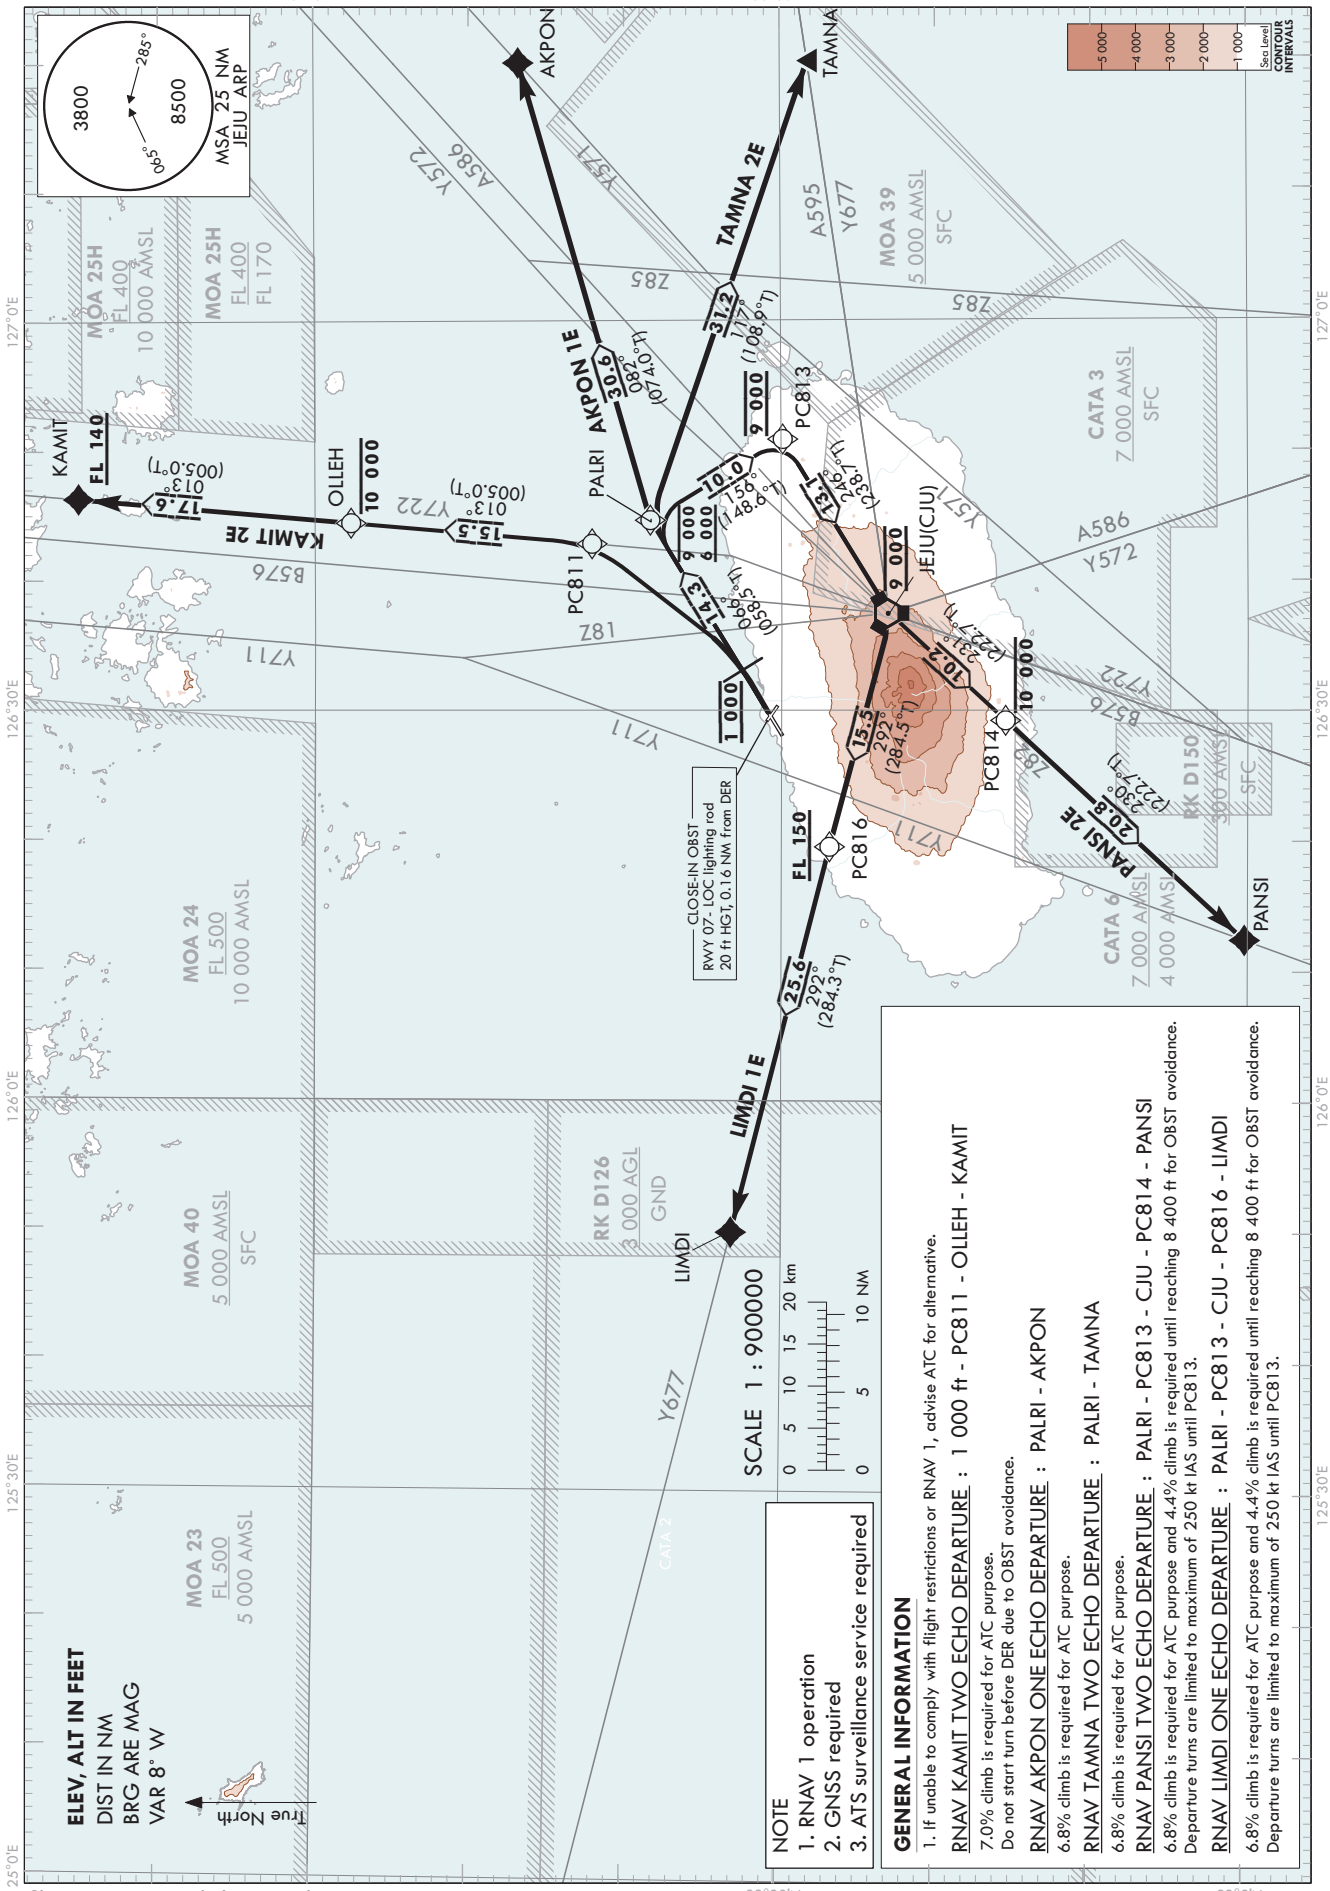

NOTE
1. RNAV 1 operation
2. GNSS required
3. ATS surveillance service required

GENERAL INFORMATION

1. If unable to comply with flight restrictions or RNAV 1, advise ATC for alternative.

RNAV KAMIT TWO ECHO DEPARTURE : 1 000 ft - PC811 - OLLEH - KAMIT
7.0% climb is required for ATC purpose.
Do not start turn before DER due to OBST avoidance.

RNAV AKPON ONE ECHO DEPARTURE : PALRI - AKPON
6.8% climb is required for ATC purpose.

RNAV TAMNA TWO ECHO DEPARTURE : PALRI - TAMNA
6.8% climb is required for ATC purpose.

RNAV PANSI TWO ECHO DEPARTURE : PALRI - PC813 - CJU - PC814 - PANSI
6.8% climb is required for ATC purpose and 4.4% climb is required until reaching 8 400 ft for OBST avoidance.
Departure turns are limited to maximum of 250 kt IAS until PC813.

RNAV LIMDI ONE ECHO DEPARTURE : PALRI - PC813 - CJU - PC816 - LIMDI
6.8% climb is required for ATC purpose and 4.4% climb is required until reaching 8 400 ft for OBST avoidance.
Departure turns are limited to maximum of 250 kt IAS until PC813.

Change : Improved clarity such as terrain.

Standard Instrument Departure Procedure Coding Tables

RNAV KAMIT 2E

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CA	-	-	066(058.5)	-	-	@1 000	-		-	RNAV 1	-
002	DF	PC811	-	-	-	L	-	-	33°42'12.1"N 126°42'48.8"E	-	RNAV 1	-
003	TF	OLLEH	-	013(005.0)	15.5	-	-10 000	-	33°57'42.2"N 126°44'26.5"E	-	RNAV 1	-
004	TF	KAMIT	-	013(005.0)	17.6	-	+FL 140	-	34°15'14.1"N 126°46'17.7"E	-	RNAV 1	-

RNAV AKPON 1E

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	PALRI	-	066(058.5)	14.3	-	-9 000 +6 000	-	33°38'27.2"N 126°44'37.4"E	-	RNAV 1	-
002	TF	AKPON	-	082(074.0)	30.6	-	-	-	33°46'49.6"N 127°19'53.0"E	-	RNAV 1	-

RNAV TAMNA 2E

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	PALRI	-	066(058.5)	14.3	-	-9 000 +6 000	-	33°38'27.2"N 126°44'37.4"E	-	RNAV 1	
002	TF	TAMNA	-	117(108.9)	31.2	-	-	-	33°28'15.5"N 127°19'53.0"E	-	RNAV 1	-

RNAV PANSI 2E

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	PALRI	-	066(058.5)	14.3	-	-	-250	33°38'27.2"N 126°44'37.4"E	-	RNAV 1	-
002	TF	PC813	-	156(148.6)	10.0	-	@9 000	-250	33°29'55.5"N 126°50'50.0"E	-	RNAV 1	-
003	TF	CJU	-	246(238.7)	13.1	-	@9 000	-	33°23'04.6"N 126°37'26.8"E	-	RNAV 1	-
004	TF	PC814	-	231(222.8)	10.2	-	-10 000	-	33°15'36.4"N 126°29'13.5"E	-	RNAV 1	-
005	TF	PANSI	-	230(222.7)	20.8	-	-	-	33°00'14.4"N 126°12'25.1"E	-	RNAV 1	-

RNAV LIMDI 1E

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	PALRI	-	066(058.5)	14.3	-	-	-250	33°38'27.2"N 126°44'37.4"E	-	RNAV 1	-
002	TF	PC813	-	156(148.6)	10.0	-	@9 000	-250	33°29'55.5"N 126°50'50.0"E	-	RNAV 1	-
003	TF	CJU	-	246(238.7)	13.1	-	@9 000	-	33°23'04.6"N 126°37'26.8"E	-	RNAV 1	-
004	TF	PC816	-	292(284.5)	15.5	-	+FL 150	-	33°26'56.5"N 126°19'30.8"E	-	RNAV 1	-
005	TF	LIMDI	-	292(284.3)	25.6	-	-	-	33°33'13.3"N 125°49'53.0"E	-	RNAV 1	-


STANDARD DEPARTURE CHART INSTRUMENT (SID) - ICAO

TRANSITION ALT 14 000
TRANSITION LVL FL 140

JEJU	DEP	119.225
		121.2
JEJU	TWR	118.2
		118.55

JEJU/Jeju Intl(RKPC)
RWY 07
IPDAS 4K, MAKET 4K
TAMNA 2K, CJU 5K

Note : Departure under ICAO Flight Procedures.

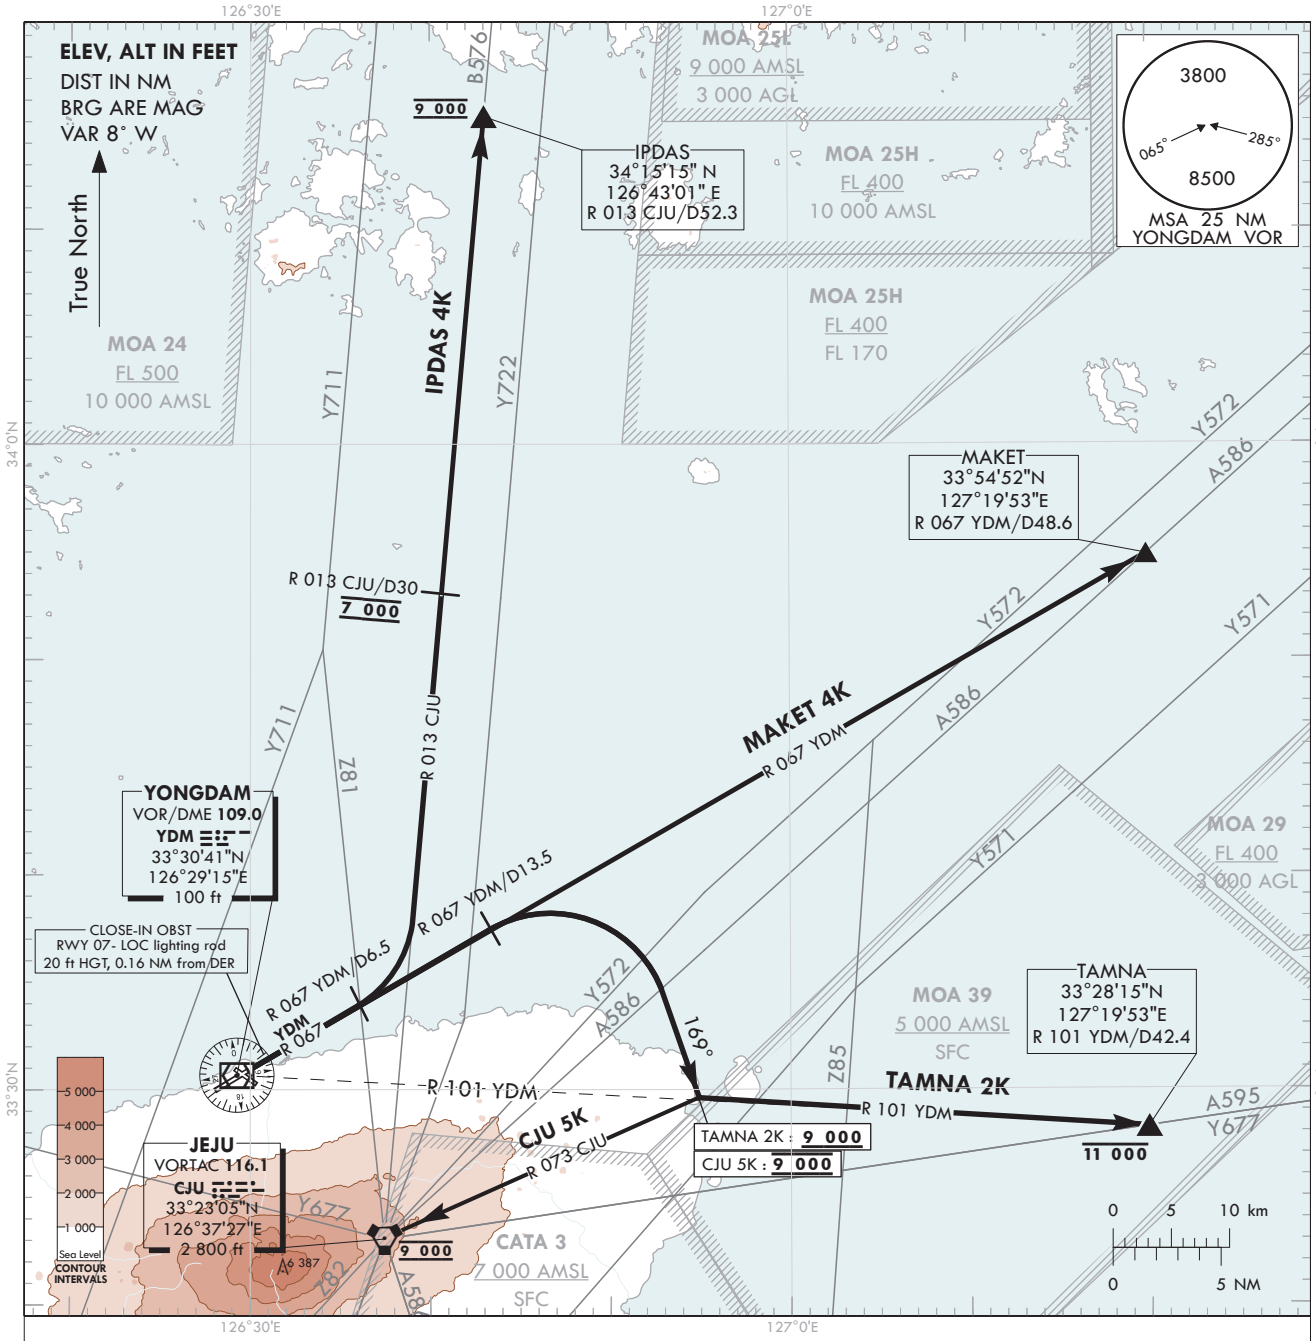

IPDAS FOUR KILO DEPARTURE

Climb on R 067 YDM until D6.5, then turn Left to intercept R 013 CJU then proceed direct to IPDAS.
* Minimum 4.9% CG is required for ATC purpose.
* Cross R 013 CJU/D30.0 at 7 000 ft and Cross IPDAS at 9 000 ft unless otherwise directed by ATC.

MAKET FOUR KILO DEPARTURE

Climb on R 067 YDM, then proceed direct to MAKET.
* Minimum 4.9% CG is required for ATC purpose.

TAMNA TWO KILO DEPARTURE

Climb on R 067 YDM until D13.5, then turn Right HDG 169° to intercept R 101 YDM then proceed direct to TAMNA.
* Minimum 5.4% CG is required for ATC purpose.
* Maintain at or above 9 000 ft before intercepting R 101 YDM and Cross TAMNA at or below 11 000 ft unless otherwise directed by ATC.

JEJU FIVE KILO DEPARTURE

Climb on R 067 YDM until D13.5, then turn Right HDG 169° to intercept R 073 CJU, then proceed direct to CJU.
* Minimum 5.4% CG is required for ATC purpose.
* Maintain at 9 000 ft before intercepting R 073 CJU and Cross JEJU VORTAC at 9 000 ft unless otherwise directed by ATC.

Change : Improved clarity such as terrain.

INTENTIONALLY

LEFT

BLANK


STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO

Note : Departure under ICAO Flight Procedures.

TRANSITION ALT 14 000
TRANSITION LVL FL 140

JEJU DEP 119.225
121.2
JEJU TWR 118.2
118.55

JEJU/Jeju Intl(RKPC)
RWY 25
RNAV KAMIT 1W, RNAV IPDAS 1W
RNAV AKPON 1W, RNAV TAMNA 3W
RNAV PANSI 2W RNAV LIMDI 1W

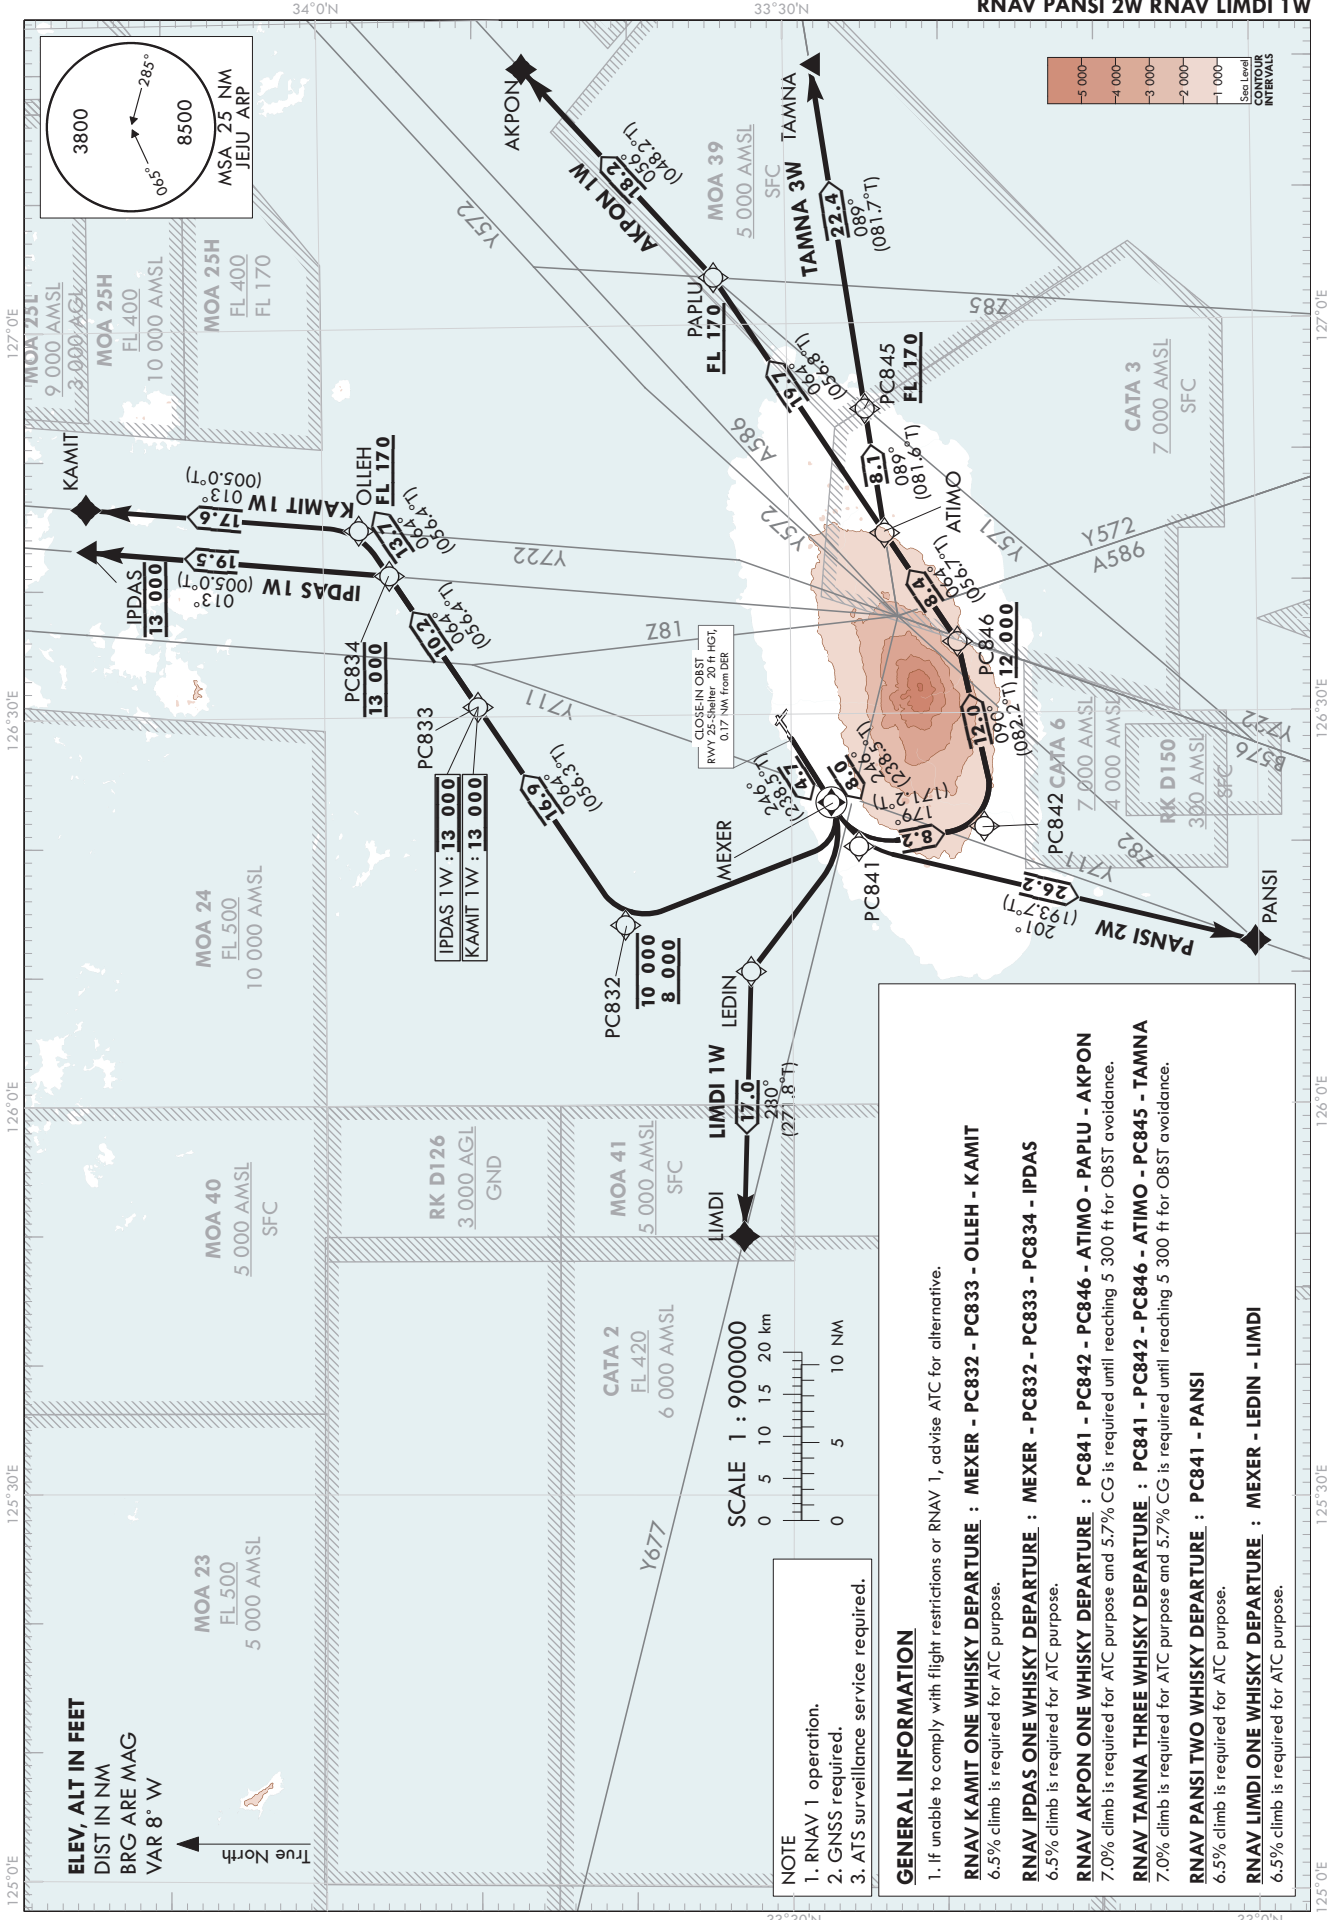

GENERAL INFORMATION

1. If unable to comply with flight restrictions or RNAV 1, advise ATC for alternative.

RNAV KAMIT ONE WHISKY DEPARTURE : MEXER - PC832 - PC833 - OLLEH - KAMIT
6.5% climb is required for ATC purpose.

RNAV IPDAS ONE WHISKY DEPARTURE : MEXER - PC832 - PC833 - PC834 - IPDAS
6.5% climb is required for ATC purpose.

RNAV AKPON ONE WHISKY DEPARTURE : PC841 - PC842 - PC846 - ATIMO - PAPLU - AKPON
7.0% climb is required for ATC purpose and 5.7% CG is required until reaching 5 300 ft for OBST avoidance.

RNAV TAMNA THREE WHISKY DEPARTURE : PC841 - PC842 - PC846 - ATIMO - PC845 - TAMNA
7.0% climb is required for ATC purpose and 5.7% CG is required until reaching 5 300 ft for OBST avoidance.

RNAV PANSI TWO WHISKY DEPARTURE : PC841 - PANSI
6.5% climb is required for ATC purpose.

RNAV LIMDI ONE WHISKY DEPARTURE : MEXER - LEDIN - LIMDI
6.5% climb is required for ATC purpose.

Change : Improved clarity such as terrain.

Standard Instrument Departure Procedure Coding Tables

RNAV KAMIT 1W

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	MEXER	Y	246(238.5)	4.7	-	-	-	33°27'28.0"N 126°23'12.0"E	-	RNAV 1	-
002	DF	PC832	-	-	-	R	-10 000 +8 000	-	33°40'46.0"N 126°13'51.9"E	-	RNAV 1	-
003	TF	PC833	-	064(056.3)	16.9	-	+13 000	-	33°50'08.8"N 126°30'44.8"E	-	RNAV 1	-
004	TF	OLLEH	-	064(056.4)	13.7	-	+FL 170	-	33°57'42.2"N 126°44'26.5"E	-	RNAV 1	-
005	TF	KAMIT	-	013(005.0)	17.6	-	-	-	34°15'14.1"N 126°46'17.7"E	-	RNAV 1	-

RNAV IPDAS 1W

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	MEXER	Y	246(238.5)	4.7	-	-	-	33°27'28.0"N 126°23'12.0"E	-	RNAV 1	-
002	DF	PC832	-	-	-	R	-10 000 +8 000	-	33°40'46.0"N 126°13'51.9"E	-	RNAV 1	-
003	TF	PC833	-	064(056.3)	16.9	-	@13 000	-	33°50'08.8"N 126°30'44.8"E	-	RNAV 1	-
004	TF	PC834	-	064(056.4)	10.2	-	@13 000	-	33°55'46.2"N 126°40'55.7"E	-	RNAV 1	-
005	TF	IPDAS	-	013(005.0)	19.5	-	@13 000	-	34°15'14.7"N 126°43'01.4"E	-	RNAV 1	-

RNAV AKPON 1W

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	PC841	-	246(238.5)	8.0	-	-	-	33°25'42.7"N 126°19'47.8"E	-	RNAV 1	-
002	TF	PC842	-	179(171.2)	8.2	-	-	-	33°17'38.3"N 126°21'17.3"E	-	RNAV 1	-
003	TF	PC846	-	090(082.2)	12.0	-	+12 000	-	33°19'15.6"N 126°35'28.6"E	-	RNAV 1	-
004	TF	ATIMO	-	064(056.7)	8.4	-	-	-	33°23'52.5"N 126°43'51.2"E	-	RNAV 1	-
005	TF	PAPLU	-	064(056.8)	19.7	-	+FL 170	-	33°34'41.3"N 127°03'36.5"E	-	RNAV 1	-
006	TF	AKPON	-	056(048.2)	18.2	-	-	-	33°46'49.6"N 127°19'53.0"E	-	RNAV 1	-

JEJU/Jeju Intl(RKPC)
RWY 25
RNAV TAMNA 3W
RNAV PANSI 2W, RNAV LIMDI 1W

AERONAUTICAL DATA TABULATION

Standard Instrument Departure Procedure Coding Tables

RNAV TAMNA 3W

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	PC841	-	246(238.5)	8.0	-	-	-	33°25'42.7"N 126°19'47.8"E	-	RNAV 1	-
002	TF	PC842	-	179(171.2)	8.2	-	-	-	33°17'38.3"N 126°21'17.3"E	-	RNAV 1	-
003	TF	PC846	-	090(082.2)	12.0	-	+12 000	-	33°19'15.6"N 126°35'28.6"E	-	RNAV 1	-
004	TF	ATIMO	-	064(056.7)	8.4	-	-	-	33°23'52.5"N 126°43'51.2"E	-	RNAV 1	-
005	TF	PC845	-	089(081.6)	8.1	-	+FL 170	-	33°25'03.2"N 126°53'24.0"E	-	RNAV 1	-
006	TF	TAMNA	-	089(081.7)	22.4	-	-	-	33°28'15.5"N 127°19'53.0"E	-	RNAV 1	-

RNAV PANSI 2W

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	PC841	-	246(238.5)	8.0	-	-	-	33°25'42.7"N 126°19'47.8"E	-	RNAV 1	-
002	TF	PANSI	-	201(193.7)	26.2	-	-	-	33°00'14.4"N 126°12'25.1"E	-	RNAV 1	-

RNAV LIMDI 1W

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	MEXER	Y	246(238.5)	4.7	-	-	-	33°27'28.0"N 126°23'12.0"E	-	RNAV 1	-
002	DF	LEDIN	-	-	-	R	-	-	33°32'42.1"N 126°10'14.9"E	-	RNAV 1	-
003	TF	LIMDI	-	280(271.8)	17.0	-	-	-	33°33'13.3"N 125°49'53.0"E	-	RNAV 1	-

Change : Information of course/track.

INTENTIONALLY

LEFT

BLANK

STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO


Note : Departure under ICAO Flight Procedures.

TRANSITION ALT 14 000
TRANSITION LVL FL 140

JEJU	DEP	119.225 121.2
JEJU	TWR	118.2 118.55

JEJU/Jeju Intl(RKPC)

RWY 25
CJU 3L, IPDAS 1L

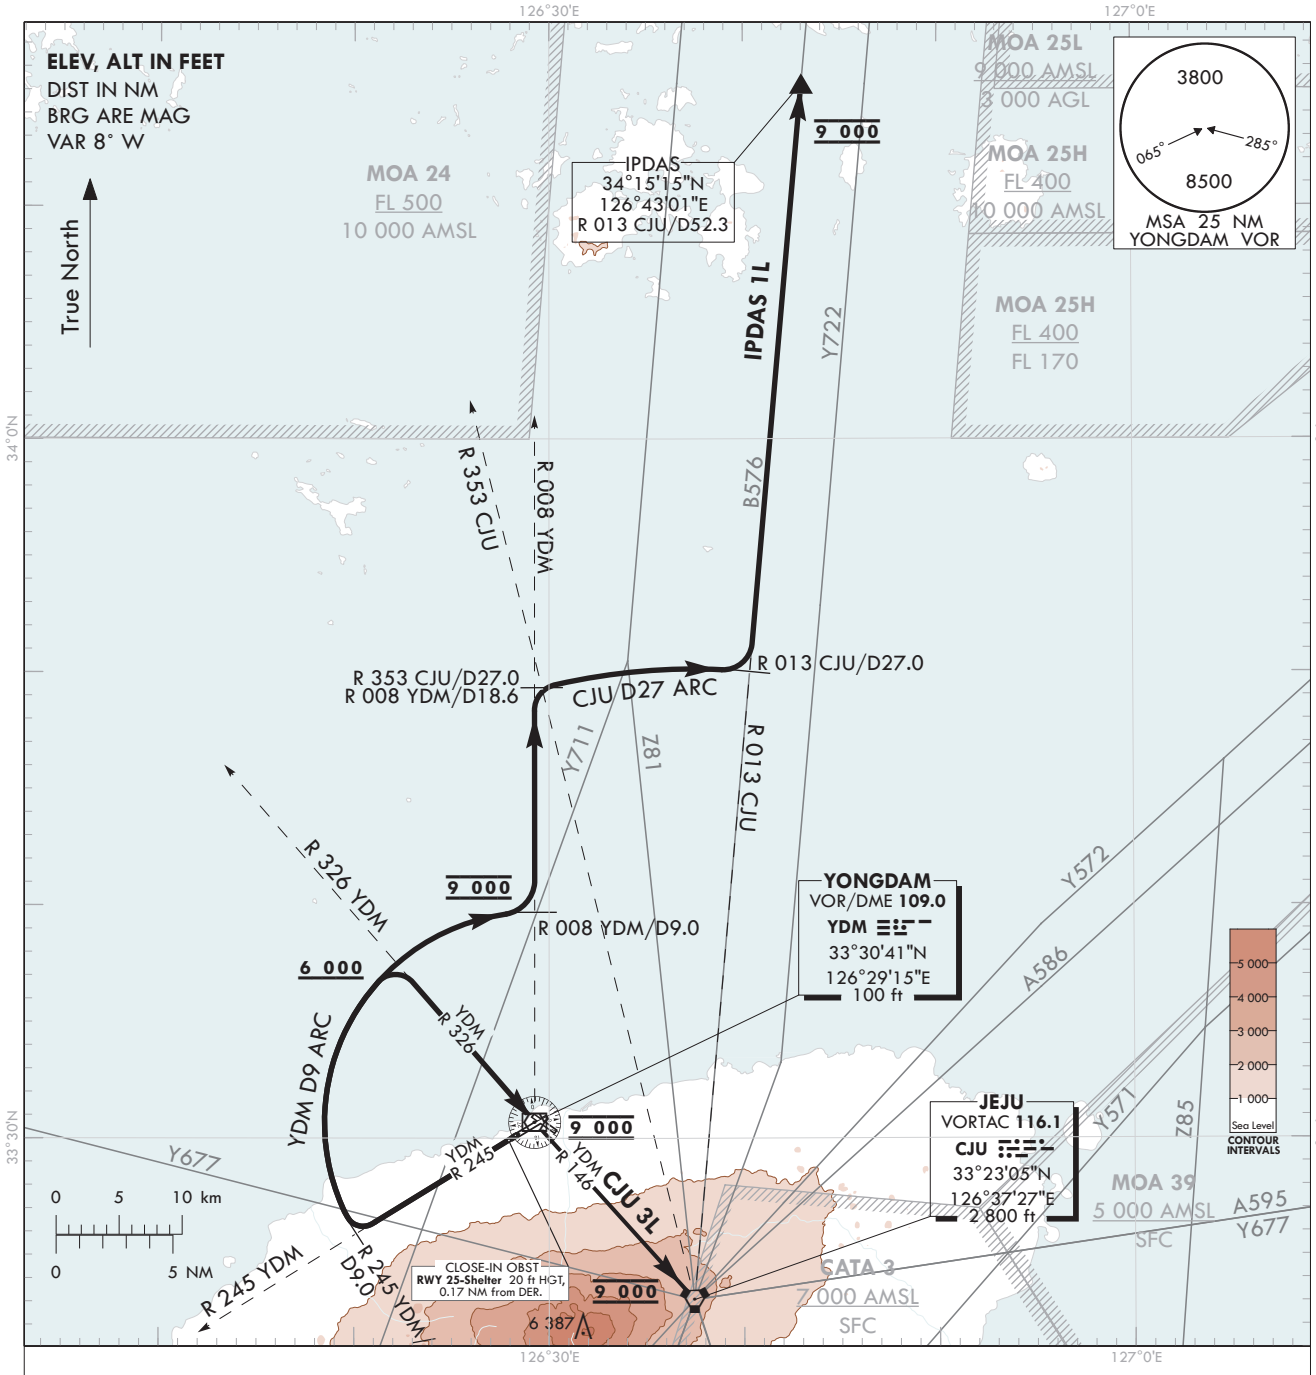

JEJU THREE LIMA DEPARTURE

Climb on R 245 YDM until D9.0, then turn Right and proceed via YDM D9.0 arc to R 326 YDM,
then Right turn via R 326 YDM to YDM, then direct to CJU via R 146 YDM.
* Minimum 6.0% CG is required for ATC purpose and 3.7% CG is required until 1 400 ft for OBST avoidance.
* Cross R 326 YDM at or above 6 000 ft, then YDM at 9 000 ft and maintain 9 000 ft unless otherwise directed by ATC.

IPDAS ONE LIMA DEPARTURE

Climb on R 245 YDM until D9.0, then turn Right and proceed via YDM D9.0 arc to R 008 YDM,
then turn Left on R 008 YDM until D18.6 to join R 353 CJU and proceed via CJU D27.0 arc to R 013 CJU,
then Left turn via R 013 CJU to IPDAS.
* Minimum 6.0% CG is required for ATC purpose and 3.7% CG is required until 1 400 ft for OBST avoidance.
* Cross R 326 YDM at or above 6 000 ft , then Cross R 008 YDM/D9.0 at 9 000 ft and maintain 9 000 ft unless otherwise directed by ATC.

Change : Improved clarity such as terrain.

INTENTIONALLY

LEFT

BLANK


STANDARD DEPARTURE CHART INSTRUMENT (SID) - ICAO

Note : Departure under ICAO Flight Procedures.

TRANSITION ALT 14 000
TRANSITION LVL FL 140

JEJU	DEP	119.225 121.2
JEJU	TWR	118.2 118.55

JEJU/Jeju Intl(RKPC)
RWY 31
RNAV KAMIT 2N
RNAV AKPON 1N

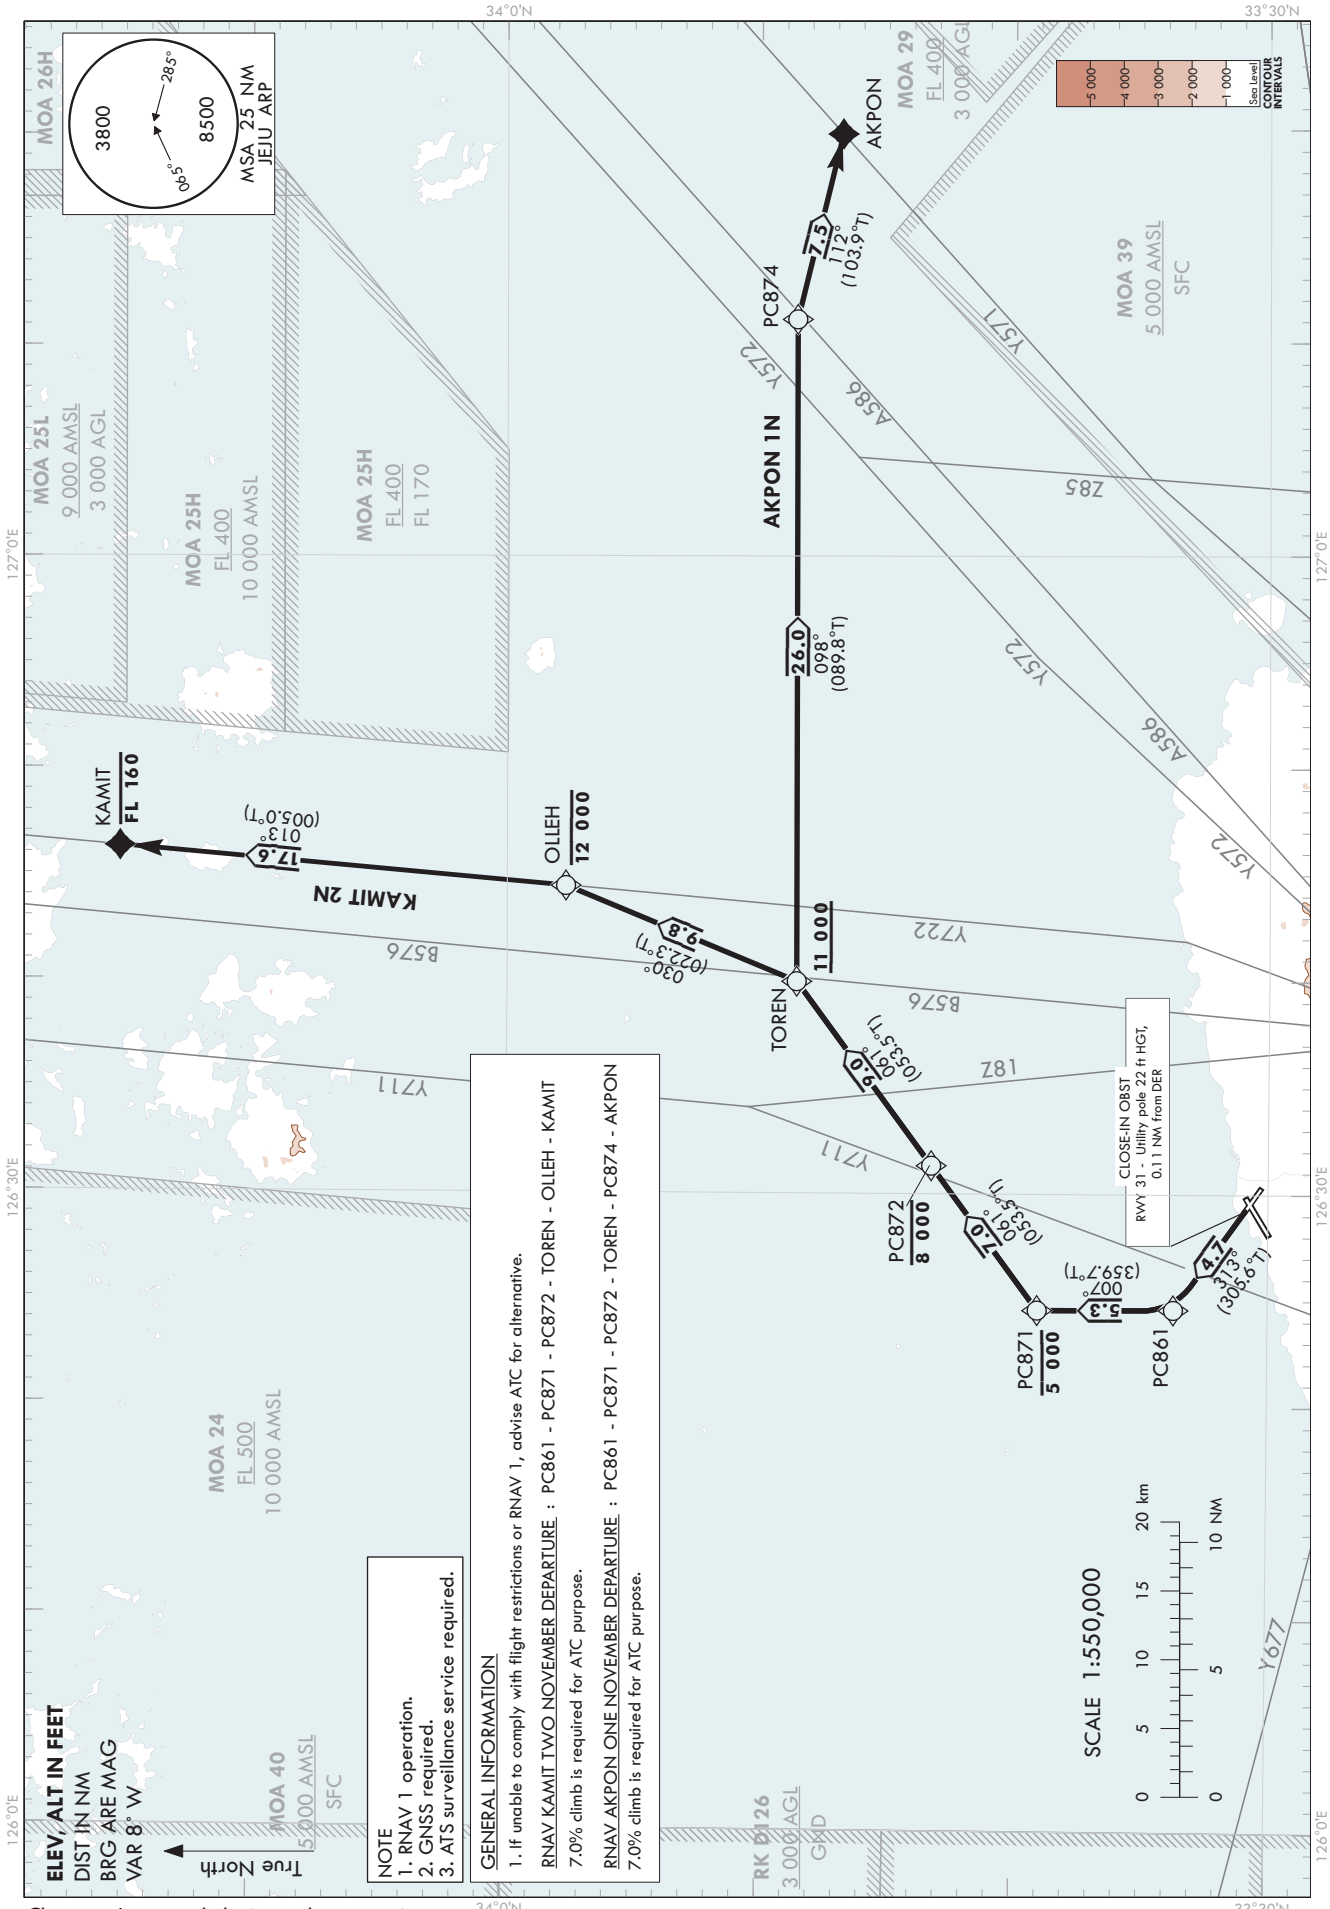

Change : Improved clarity such as terrain.

Standard Instrument Departure Procedure Coding Tables

RNAV KAMIT 2N

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	PC861	-	313(305.6)	4.7	-	-	-	33°33'43.8"N 126°24'34.1"E	-	RNAV 1	-
002	TF	PC871	-	007(359.7)	5.3	-	-5 000	-	33°39'05.3"N 126°24'32.0"E	-	RNAV 1	-
003	TF	PC872	-	061(053.5)	7.0	-	-8 000	-	33°43'16.9"N 126°31'18.7"E	-	RNAV 1	-
004	TF	TOREN	-	061(053.5)	9.0	-	+11 000	-	33°48'36.8"N 126°39'57.7"E	-	RNAV 1	-
005	TF	OLLEH	-	030(022.3)	9.8	-	-12 000	-	33°57'42.2"N 126°44'26.5"E	-	RNAV 1	-
006	TF	KAMIT	-	013(005.0)	17.6	-	-FL 160	-	34°15'14.1"N 126°46'17.7"E	-	RNAV 1	-

RNAV AKPON 1N

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	PC861	-	313(305.6)	4.7	-	-	-	33°33'43.8"N 126°24'34.1"E	-	RNAV 1	-
002	TF	PC871	-	007(359.7)	5.3	-	-5 000	-	33°39'05.3"N 126°24'32.0"E	-	RNAV 1	-
003	TF	PC872	-	061(053.5)	7.0	-	-8 000	-	33°43'16.9"N 126°31'18.7"E	-	RNAV 1	-
004	TF	TOREN	-	061(053.5)	9.0	-	+11 000	-	33°48'36.8"N 126°39'57.7"E	-	RNAV 1	-
005	TF	PC874	-	098(089.8)	26.0	-	-	-	33°48'38.0"N 127°11'08.8"E	-	RNAV 1	-
006	TF	AKPON	-	112(103.9)	7.5	-	-	-	33°46'49.6"N 127°19'53.0"E	-	RNAV 1	-


STANDARD DEPARTURE CHART INSTRUMENT (SID) - ICAO

TRANSITION ALT 14 000
TRANSITION LVL FL 140

JEJU	DEP	119.225 121.2
JEJU	TWR	118.2 118.55

JEJU/Jeju Intl(RKPC)
RWY 07 RADAR 2E
RWY 25 RADAR 3W
RWY 31 RADAR 1N

Note : Departure under ICAO Flight Procedures.

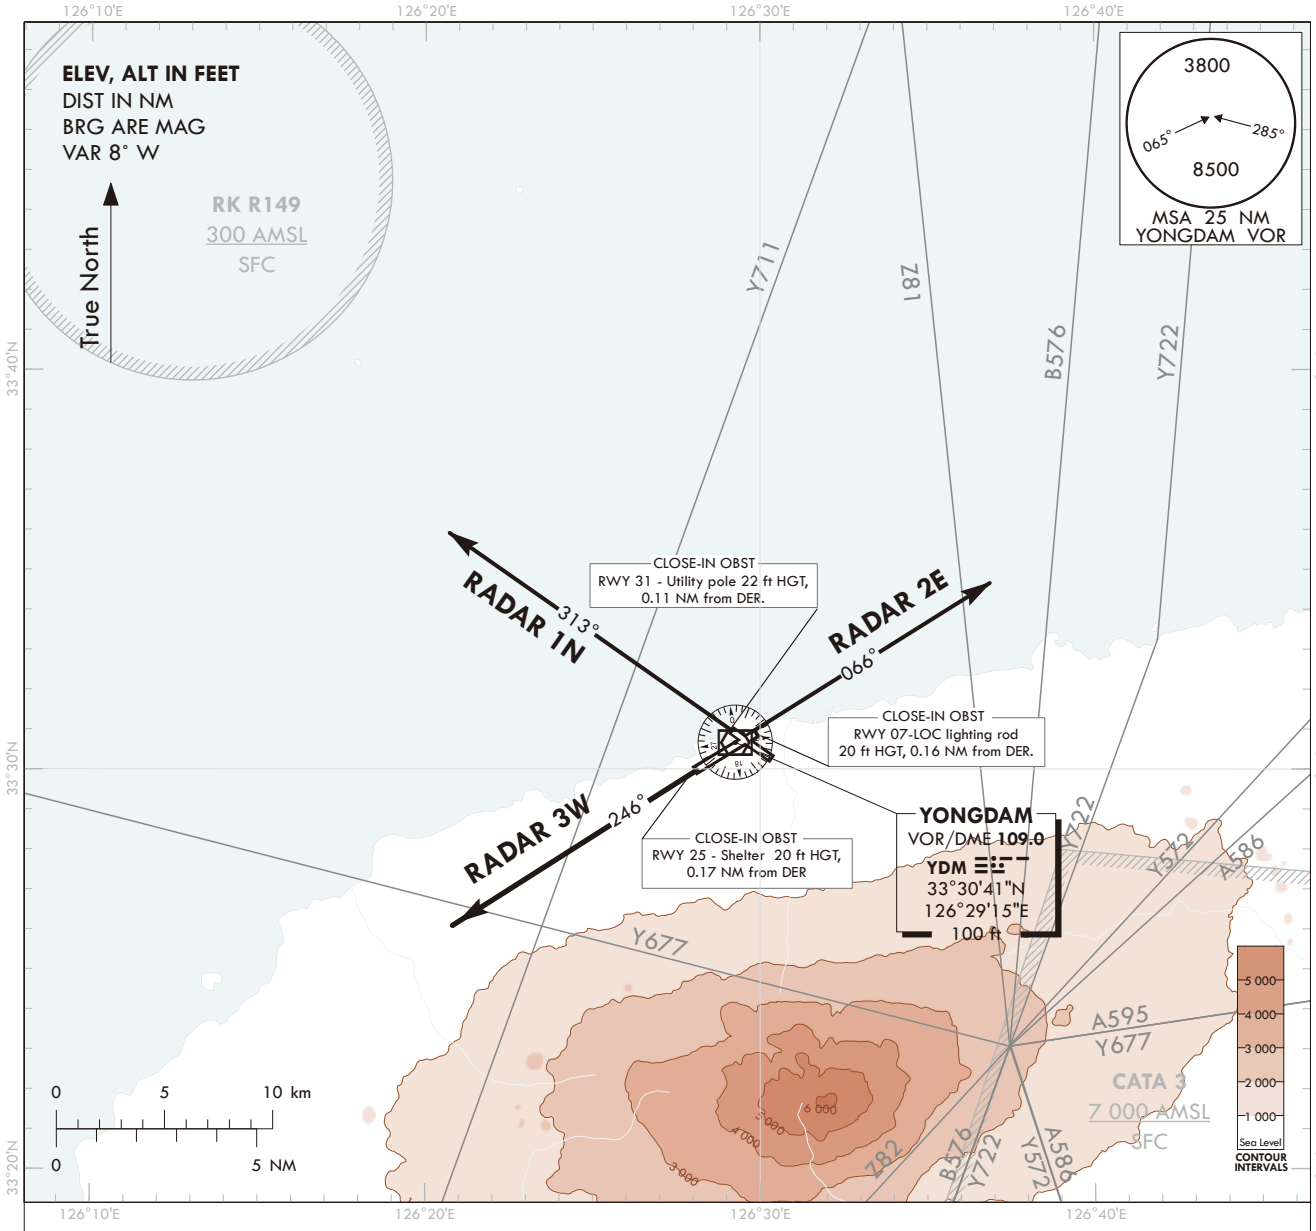

RADAR TWO ECHO DEPARTURE

TAKE OFF RWY 07 : Climb on RWY HDG until reaching 2 200 ft for RADAR VECTOR.
* Minimum 4.5% CG is required until 2 200 ft for ATC purpose.

RADAR THREE WHISKEY DEPARTURE

TAKE OFF RWY 25 : Climb on RWY HDG until reaching 3 000 ft for RADAR VECTOR.
* Minimum 3.7% CG is required until 1 400 ft for OBST avoidance.

RADAR ONE NOVEMBER DEPARTURE

TAKE OFF RWY 31 : Climb on RWY HDG until reaching 2 200 ft for RADAR VECTOR.
* Minimum 4.5% CG is required until 2 200 ft for ATC purpose.

NOTE : These procedures are available only for aircraft that don't satisfy RNAV 1 navigation specification.

Change : Improved clarity such as terrain.

INTENTIONALLY

LEFT

BLANK