INSTRUMENT APPROACH CHART - ICAO


AERODROME ELEV 13 ft
HEIGHTS RELATED TO
THR RWY 36L - ELEV 12 ft

GIMHAE	APP	125.5	135.7
GIMHAE	TWR	118.1	118.45

BUSAN/Gimhae Intl(RKPK)

ILS X or LOC X RWY 36L

Note : Approach under ICAO Flight Procedures.

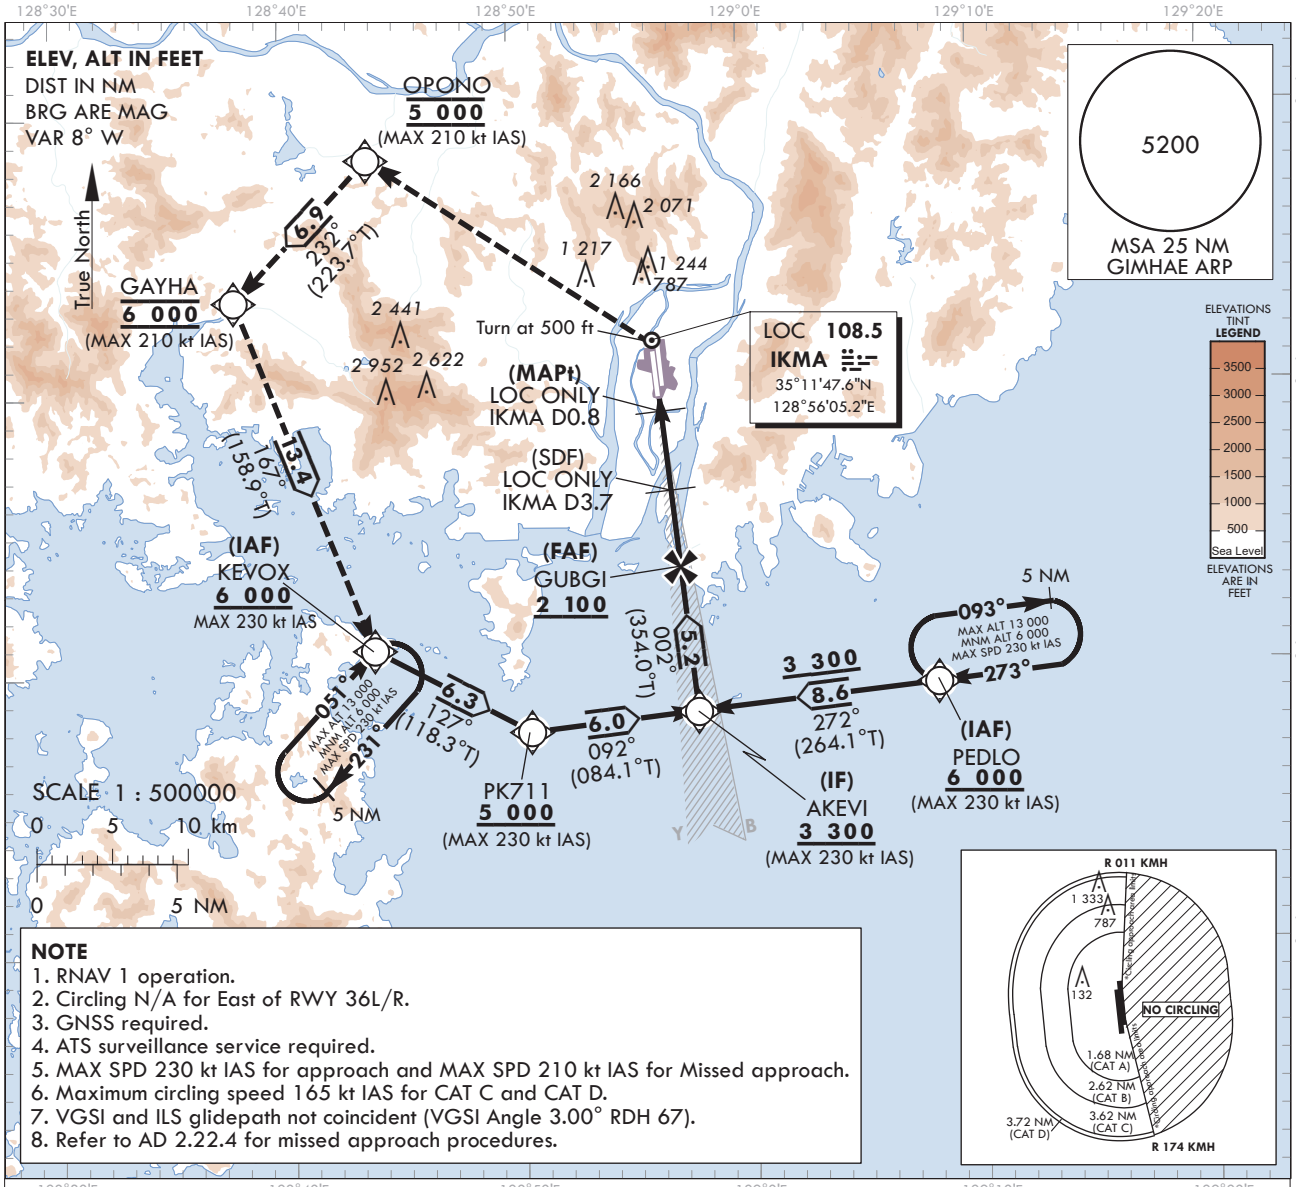


NOTE
1. RNAV 1 operation.
2. Circling N/A for East of RWY 36L/R.
3. GNSS required.
4. ATS surveillance service required.
5. MAX SPD 230 kt IAS for approach and MAX SPD 210 kt IAS for Missed approach.
6. Maximum circling speed 165 kt IAS for CAT C and CAT D.
7. VGSI and ILS glidepath not coincident (VGSI Angle 3.00° RDH 67).
8. Refer to AD 2.22.4 for missed approach procedures.

RECOMMENDED PROFILE(LOC ONLY)	DME IKMA	6	5	4	3	2
Final Approach Gradient 5.41%, 329 ft/NM(FAF-SDF) 5.24%, 318 ft/NM(SDF-THR)	ALT(HGT)	1 967 (1 955)	1 639 (1 627)	1 310 (1 298)	978 (966)	660 (648)

TRANSITION ALT	14 000
TRANSITION LVL	FL 140

NOTE
1. Missed approach turn limited to 210 kt IAS maximum.
2. Missed approach minimum climb gradient of
(OCH 387) 5.8% CG required until 5 000 ft due airspace restrictions only.
(OCH 200) 6.1% CG required until 5 000 ft due airspace restrictions only.
3. If unable to comply with flight restrictions, advise ATC for alternative.

MISSED APPROACH
Climb to 500 ft, then climbing left turn to 5 000 ft direct to OPONO, then track 232° to GAYHA and cross at 6 000 ft, then track 167° to KEVOX and HOLD.

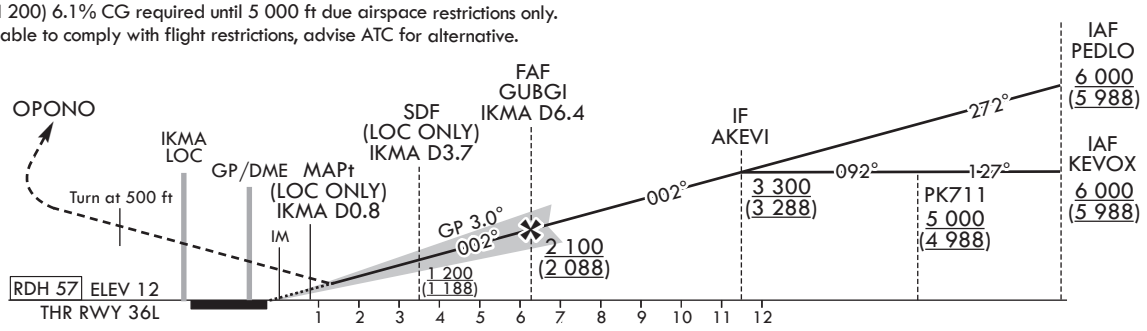

OCA (H)		A	B	C	D
Straight-in Approach	CAT-I	212 (200)			
	LOC	400 (387)			
Circling		520 (507)	1170 (1 157)	1800 (1 787)	

		Knots	60	90	120	150	180
Rate of descent	V/V fpm	318	478	637	796	955	

- Timing Not authorized for defining MAPt.
- OCH for LOC and Circling related to aerodrome ELEV 13 ft.
- CAUTION : Missed APCH CG(5.8%, 6.1%) greater than ICAO standard(5.0%).

Change : Information of note, holding procedure(092° → 093°) and Improved clarity such as terrain.

BUSAN/Gimhae Intl(RKPK)
ILS X or LOC X RWY 36L

AERONAUTICAL DATA TABULATION

ILS/LOC Approach to RWY 36L from PEDLO to AKEVI(IF)	
Fix / Point	Coordinates
PEDLO(IAF)	34°59'23.1"N 129°08'15.3"E
AKEVI(IF)	34°58'29.0"N 128°57'48.0"E

ILS/LOC Approach to RWY 36L from KEVOX to AKEVI(IF)	
Fix / Point	Coordinates
KEVOX(IAF)	35°00'51.7"N 128°43'47.2"E
PK711(SDF)	34°57'51.9"N 128°50'32.3"E
AKEVI(IF)	34°58'29.0"N 128°57'48.0"E

ILS/LOC Approach to RWY 36L from GUBGI(FAF) to MAHF		
Fix / Point		Coordinates
GUBGI(FAF)	BRG 002.39°/6.44 NM IKMA	35°03'40.0"N 128°57'08.1"E
D3.7 IKMA (SDF LOC ONLY)	BRG 002.39°/3.70 NM IKMA	35°06'24.1"N 128°56'46.9"E
D0.8 IKMA (MAPt LOC ONLY)	BRG 002.39°/0.80 NM IKMA	35°09'14.9"N 128°56'25.0"E
THR RWY 36L		35°09'54.69"N 128°56'19.79"E
IKMA DME		35°10'04.8"N 128°56'13.6"E
Climb to 500 ft	HDG 002	-
OPONO		35°18'24.2"N 128°43'46.2"E
GAYHA		35°13'22.4"N 128°37'54.4"E
KEVOX		35°00'51.7"N 128°43'47.2"E

INSTRUMENT APPROACH CHART - ICAO


AERODROME ELEV 13 ft
HEIGHTS RELATED TO
THR RWY 36R - ELEV **7** ft

GIMHAE	APP	125.5	135.7
GIMHAE	TWR	118.1	118.45

BUSAN/Gimhae Intl(RKPK)

RNP Y RWY 36R


Note : Approach under ICAO Flight Procedures.

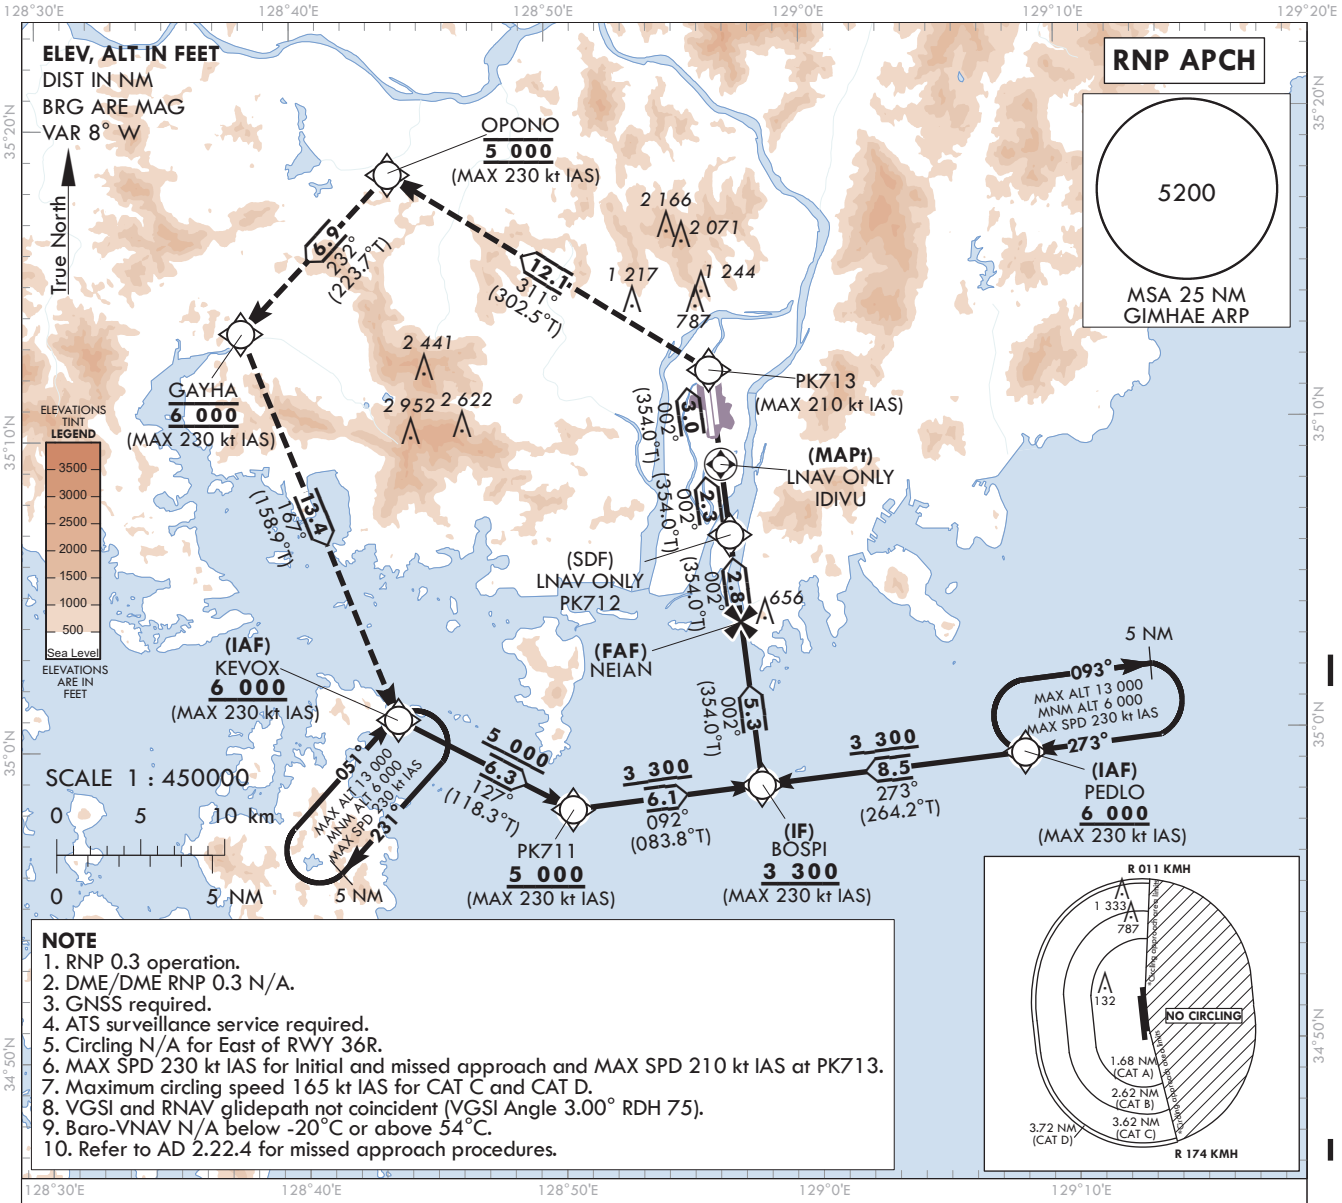

NOTE
1. RNP 0.3 operation.
2. DME/DME RNP 0.3 N/A.
3. GNSS required.
4. ATS surveillance service required.
5. Circling N/A for East of RWY 36R.
6. MAX SPD 230 kt IAS for Initial and missed approach and MAX SPD 210 kt IAS at PK713.
7. Maximum circling speed 165 kt IAS for CAT C and CAT D.
8. VGSI and RNAV glidepath not coincident (VGSI Angle 3.00° RDH 75).
9. Baro-VNAV N/A below -20°C or above 54°C.
10. Refer to AD 2.22.4 for missed approach procedures.

MISSED APPROACH
Climb to 6 000 ft on track 002° to PK713, then track 311° to cross OPONO at 5 000 ft, then track 232° to cross GAYHA at 6 000 ft, then track 167° to KEVOX and hold.
1. (OCH 587) 5.4% CG required until 5 000 ft due airspace restrictions only.
2. (OCH 413) 6.1% CG required until 5 000 ft due airspace restrictions only.
3. If unable to comply with flight restrictions, advise ATC for alternative.

TRANSITION ALT	14 000
TRANSITION LVL	FL 140

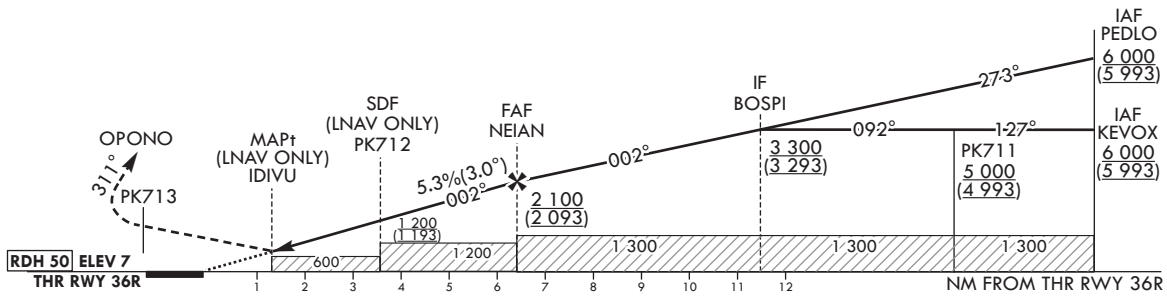

OCA (H)		A	B	C	D
Straight-in Approach	LNAV/VNAV	420 (413)			
	LNAV	600 (587)			
Circling		600 (587)	1 170 (1 157)	1 800 (1 787)	

	Knots	60	90	120	150	180
Rate of descent	V/V fpm	318	478	637	796	955

- Timing Not authorized for defining MAPt.
- OCH for Circling and LNAV related to aerodrome ELEV 13 ft.
- CAUTION : Missed APCH CG(5.4%, 6.1%) greater than ICAO standard(5.0%).

Change : Information of note, holding procedure(092° → 093°) and Improved clarity such as terrain.

Instrument Approach Procedure Coding Tables

RNP RWY 36R - via PEDLO to KEVOX(MAHF)

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	PEDLO	-	-	-	-	+6 000	-230	34°59'23.1"N 129°08'15.3"E	-	RNP APCH	IAF
002	TF	BOSPI	-	273(264.2)	8.5	-	+3 300	-230	34°58'31.2"N 128°57'56.1"E	-	RNP APCH	IF
003	TF	NEIAN	-	002(354.0)	5.3	-	+2 100	-	35°03'46.6"N 128°57'15.5"E	-	RNP APCH	FAF
004	TF	PK712	-	002(354.0)	2.8	-	+1 200	-	35°06'35.6"N 128°56'53.8"E	-	RNP APCH	SDF
005	TF	IDIVU	Y	002(354.0)	2.3	-	+600	-	35°08'52.4"N 128°56'36.2"E	-3.00/50	RNP APCH	MAPt
006	TF	PK713	-	002(354.0)	3.0	-	-	-210	35°11'54.5"N 128°56'12.8"E	-	RNP APCH	-
007	TF	OPONO	-	311(302.5)	12.1	-	@5 000	-230	35°18'24.2"N 128°43'46.2"E	-	RNP APCH	-
008	TF	GAYHA	-	232(223.7)	6.9	-	@6 000	-230	35°13'22.4"N 128°37'54.4"E	-	RNP APCH	-
009	TF	KEVOX	-	167(158.9)	13.4	-	+6 000	-230	35°00'51.7"N 128°43'47.2"E	-	RNP APCH	5 NM Leg

RNP RWY 36R - via KEVOX to KEVOX(MAHF)

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	KEVOX	-	-	-	-	+6 000	-230	35°00'51.7"N 128°43'47.2"E	-	RNP APCH	IAF
002	IF	PK711	-	127(118.3)	6.3	-	+5 000	-230	34°57'51.9"N 128°50'32.3"E	-	RNP APCH	SDF
003	TF	BOSPI	-	092(083.8)	6.1	-	+3 300	-230	34°58'31.2"N 128°57'56.1"E	-	RNP APCH	IF
004	TF	NEIAN	-	002(354.0)	5.3	-	+2 100	-	35°03'46.6"N 128°57'15.5"E	-	RNP APCH	FAF
005	TF	PK712	-	002(354.0)	2.8	-	+1 200	-	35°06'35.6"N 128°56'53.8"E	-	RNP APCH	SDF
006	TF	IDIVU	Y	002(354.0)	2.3	-	+600	-	35°08'52.4"N 128°56'36.2"E	-3.00/50	RNP APCH	MAPt
007	TF	PK713	-	002(354.0)	3.0	-	-	-210	35°11'54.5"N 128°56'12.8"E	-	RNP APCH	-
008	TF	OPONO	-	311(302.5)	12.1	-	@5 000	-230	35°18'24.2"N 128°43'46.2"E	-	RNP APCH	-
009	TF	GAYHA	-	232(223.7)	6.9	-	@6 000	-230	35°13'22.4"N 128°37'54.4"E	-	RNP APCH	-
010	TF	KEVOX	-	167(158.9)	13.4	-	+6 000	-230	35°00'51.7"N 128°43'47.2"E	-	RNP APCH	-

HOLDING PROCEDURE

Holding Identification	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
RNP RWY 36R	HM	PEDLO	Y	273(264.1)	5.0	R	-13 000 +6 000	-230	34°59'23.1"N 129°08'15.3"E	-	RNAV 1	Hold at PEDLO E Right Turn 273° Inbound 5 NM Leg.
	HM	KEVOX	Y	051(042.4)	5.0	R	-13 000 +6 000	-230	35°00'51.7"N 128°43'47.2"E	-	RNAV 1	Hold at KEVOX SW Right Turn 051° Inbound 5 NM Leg.

INSTRUMENT APPROACH CHART - ICAO


AERODROME ELEV 13 ft
HEIGHTS RELATED TO
THR RWY 18L - ELEV **8** ft
THR RWY 18R - ELEV **13** ft

GIMHAE	APP	125.5	135.7
GIMHAE	TWR	118.1	118.45

BUSAN/Gimhae Intl(RKPK)

VOR C RWY 18L/R


Note : Approach and Circling under ICAO Flight Procedures.

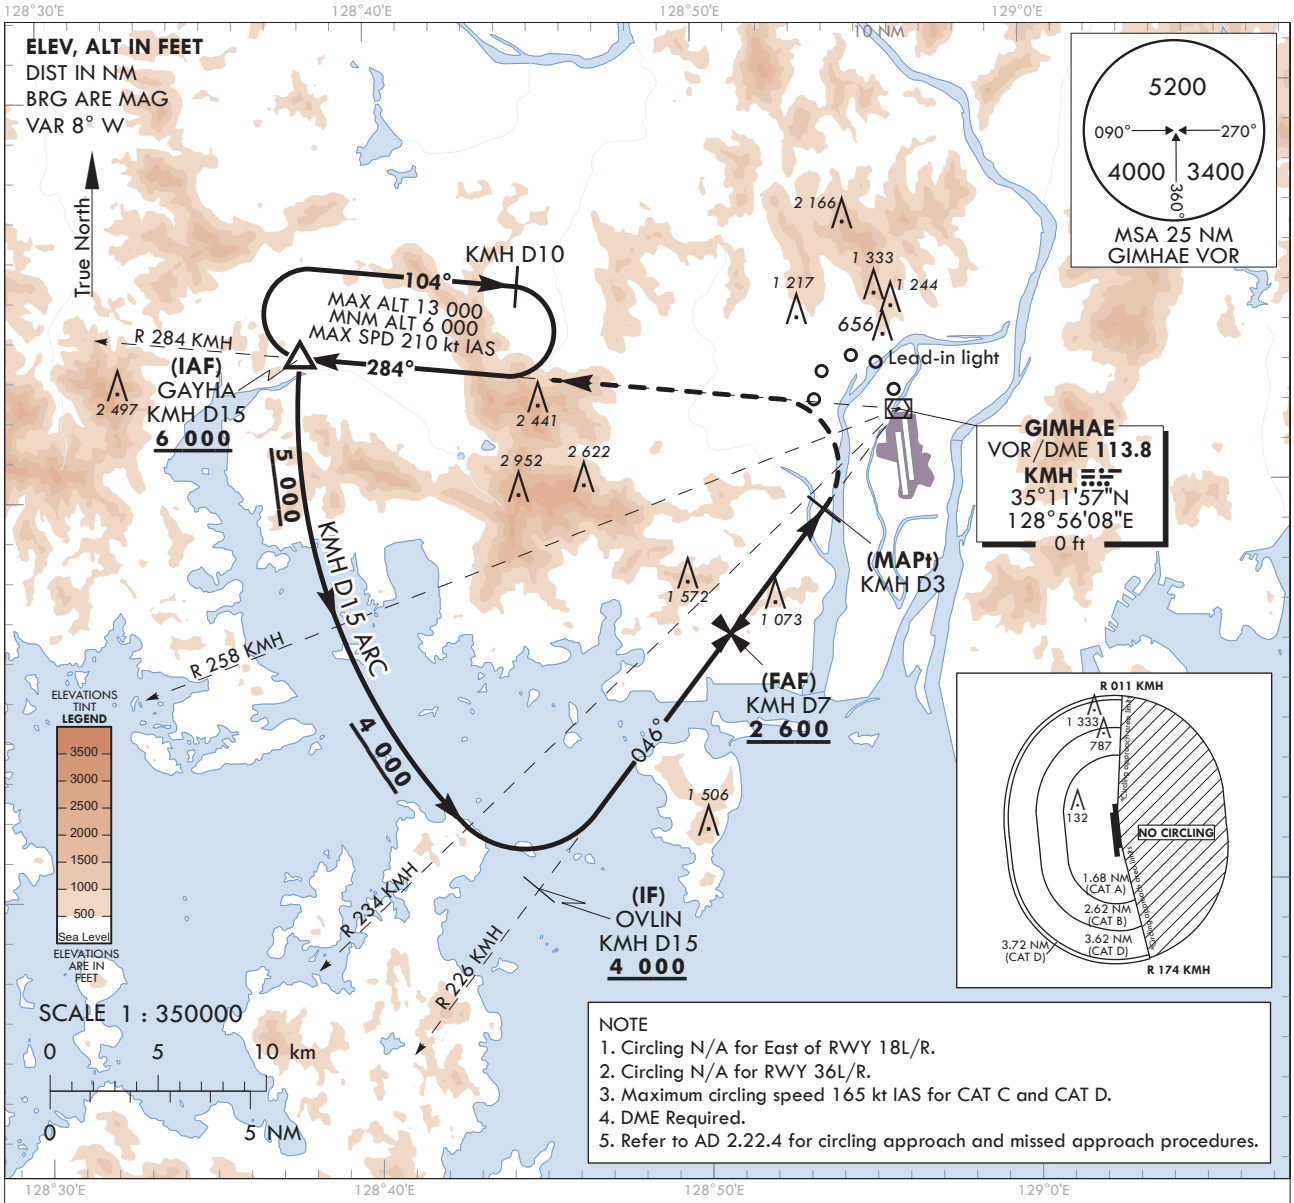

NOTE
1. Circling N/A for East of RWY 18L/R.
2. Circling N/A for RWY 36L/R.
3. Maximum circling speed 165 kt IAS for CAT C and CAT D.
4. DME Required.
5. Refer to AD 2.22.4 for circling approach and missed approach procedures.

TRANSITION ALT	14 000
TRANSITION LVL	FL 140

MISSED APPROACH
Climb to 6 000 ft via left turn to intercept R 284 KMH then R 284 KMH to GAYHA and hold.
1. Minimum 4.8% CG is required until 6 000 ft due airspace restrictions only.
2. If unable to comply with flight restrictions, advise ATC for alternative.

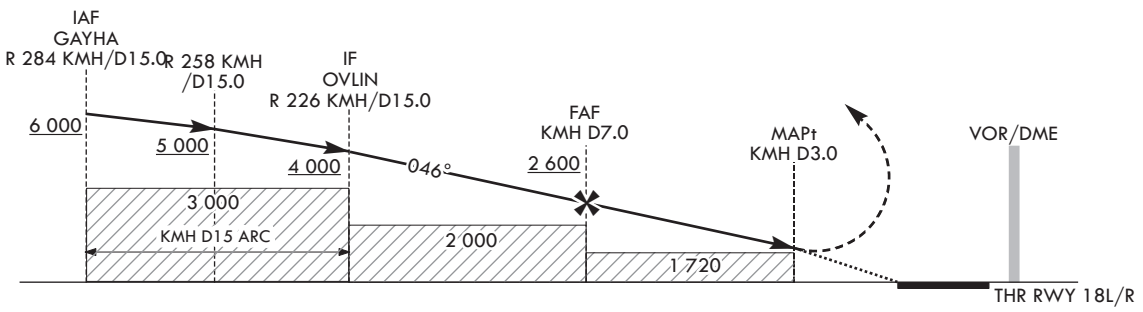

OCA (H)	A	B	C	D
CIRCLING	1 800 (1 787)			

Change : Information of note and Improved clarity such as terrain.

BUSAN/Gimhae Intl(RKPK)
VOR C RWY 18L/R

AERONAUTICAL DATA TABULATION

VOR Approach to RWY 18L/R from GAYHA			
Fix / Point		Coordinates	
GAYHA(IAF)	BRG 283.97°/15.01 NM KMH	35°13'22.4"N	128°37'54.4"E
D15.0 KMH(SDF)	BRG 258.27°/15.01 NM KMH	35°06'44.8"N	128°38'58.0"E
OVLIN(IF)	BRG 226.27°/15.01 NM KMH	35°00'04.1"N	128°44'55.9"E
D7.0 KMH(FAF)	BRG 226.27°/7.00 NM KMH	35°06'24.5"N	128°50'54.2"E
D3.0 KMH(MAPt)	BRG 226.27°/3.00 NM KMH	35°09'34.5" N	128°53'53.5" E
THR RWY 18L		35°11'38.60"N	128°56'14.73"E
THR RWY 18R		35°11'37.94"N	128°56'06.46"E
GAYHA	BRG 283.97°/15.01 NM KMH	35°13'22.4"N	128°37'54.4"E

INSTRUMENT APPROACH CHART - ICAO


Note : Approach under ICAO Flight Procedures.

AERODROME ELEV **13** ft
HEIGHTS RELATED TO
THR RWY 18R - ELEV 13 ft

GIMHAE	APP	125.5	135.7
GIMHAE	TWR	118.1	118.45

BUSAN/Gimhae Intl(RKPK)


RNP RWY 18R(AR)

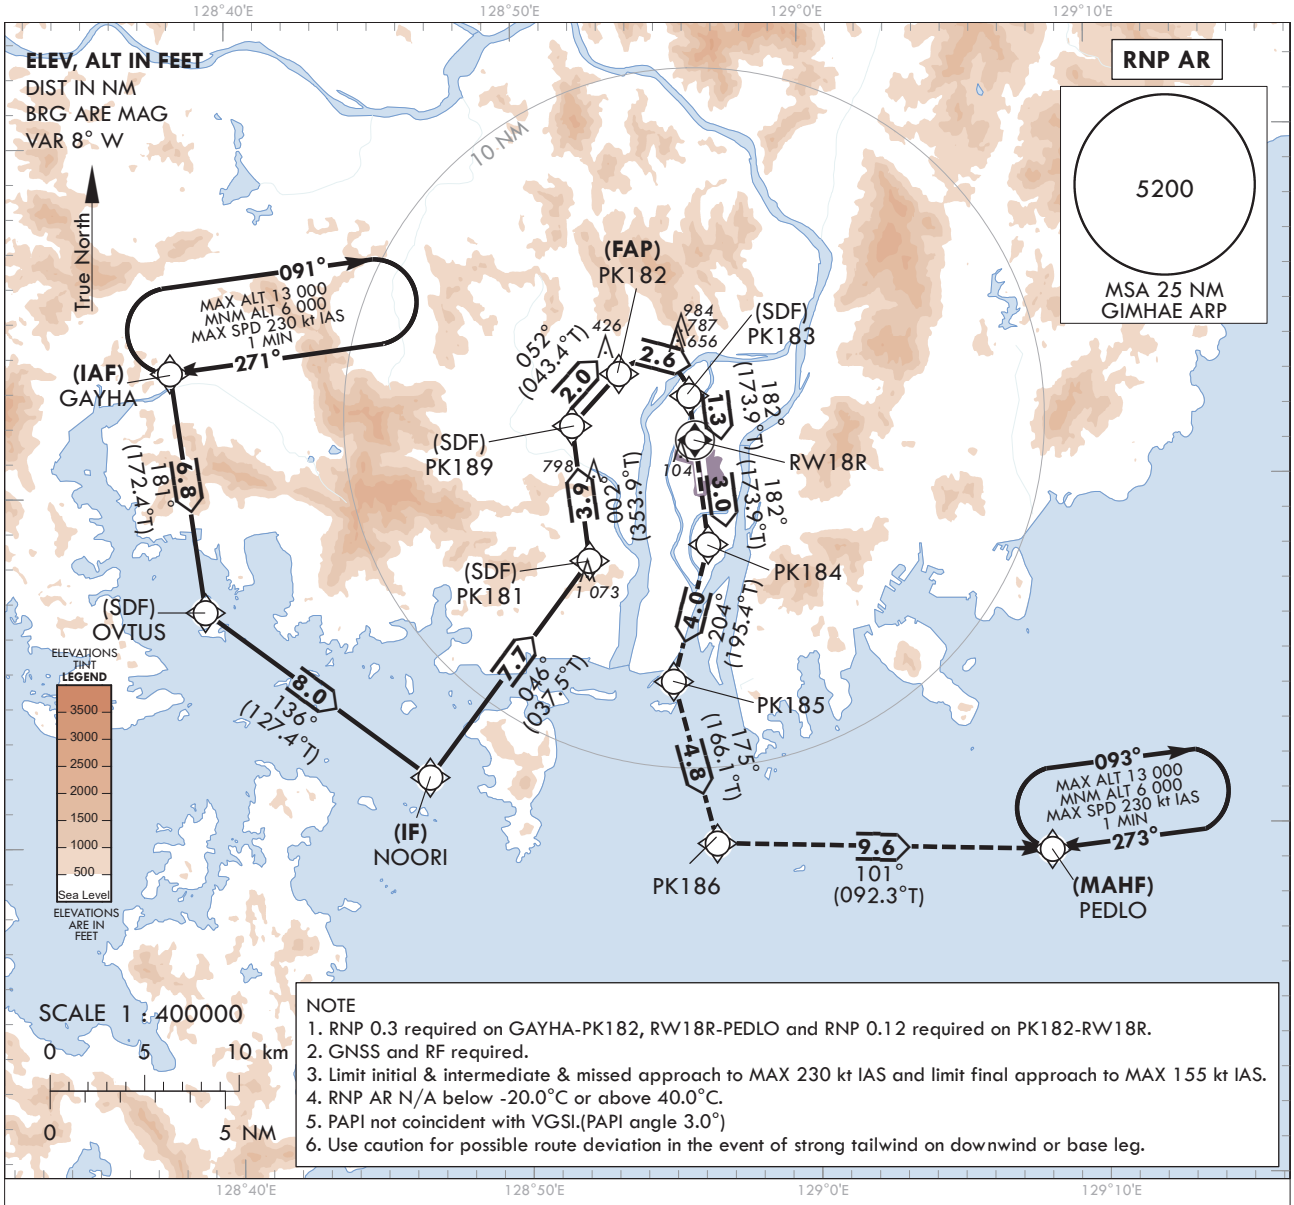

NOTE
1. RNP 0.3 required on GAYHA-PK182, RW18R-PEDLO and RNP 0.12 required on PK182-RW18R.
2. GNSS and RF required.
3. Limit initial & intermediate & missed approach to MAX 230 kt IAS and limit final approach to MAX 155 kt IAS.
4. RNP AR N/A below -20.0°C or above 40.0°C.
5. PAPI not coincident with VGSI.(PAPI angle 3.0°)
6. Use caution for possible route deviation in the event of strong tailwind on downwind or base leg.

TRANSITION ALT	14 000
TRANSITION LVL	FL 140

MISSED APPROACH
Climb to 6 000 ft via on track 182° to PK184, then track 204° to PK185, then track 175° to PK186, then track 101° to PEDLO and hold.

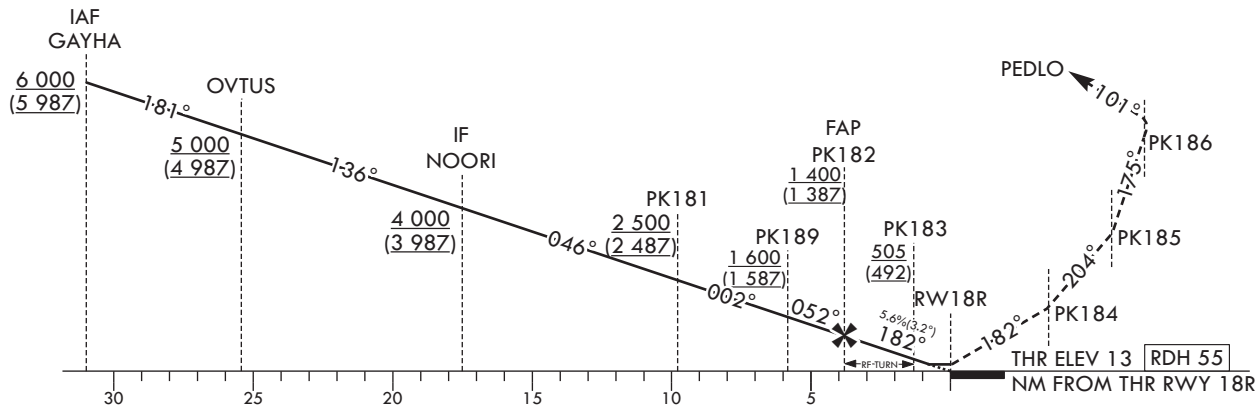

OCA(H)		A	B	C	D
Straight-in Approach	RNP 0.12	270 (257)			

Rate of descent	Knots	60	90	120	150	180
	V/V fpm	340	510	679	849	1 019

*Timing Not authorized for defining MAPt.
*Circling Not authorized.

Change : Information of rate of descent and Improved clarity such as terrain.

Instrument Approach Procedure Coding Tables

RNP RWY 18R(AR)

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	GAYHA	-	-	-	-	+6 000	-230	35°13'22.4"N 128°37'54.4"E	-	-	IAF
002	TF	OVTUS	-	181(172.4)	6.8	-	+5 000	-230	35°06'40.3"N 128°39'00.0"E	-	RNP 0.3	SDF
003	TF	NOORI	-	136(127.4)	8.0	-	+4 000	-230	35°01'50.0"N 128°46'41.8"E	-	RNP 0.3	IF
004	TF	PK181	-	046(037.5)	7.7	-	+2 500	-230	35°07'56.1"N 128°52'23.3"E	-	RNP 0.3	SDF
005	TF	PK189	-	002(353.9)	3.9	-	+1 600	-230	35°11'48.6"N 128°51'53.1"E	-	RNP 0.3	SDF
006	TF	PK182	-	052(043.4)	2.0	-	+1 400	-155	35°13'15.4"N 128°53'33.0"E	-	RNP 0.3	FAP
007	RF Center : ARC01 r=1.16 NM	PK183	-	-	2.6	R	+505	-155	35°12'35.5"N 128°55'59.0"E	-	RNP 0.12	-
008	TF	RW18R	Y	182(173.9)	1.3	-	-	-155	35°11'18.58"N 128°56'08.96"E	-3.20/55	RNP 0.12	-
009	TF	PK184	-	182(173.9)	3.0	-	-	-230	35°08'19.3"N 128°56'32.1"E	-	RNP 0.3	-
010	TF	PK185	-	204(195.4)	4.0	-	-	-230	35°04'25.7"N 128°55'13.8"E	-	RNP 0.3	-
011	TF	PK186	-	175(166.1)	4.8	-	-	-230	34°59'46.2"N 128°56'37.6"E	-	RNP 0.3	-
012	TF	PEDLO	Y	101(092.3)	9.6	-	+6 000	-230	34°59'23.1"N 129°08'15.3"E	-	RNP 0.3	-

HOLDING PROCEDURE

Holding Identification	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	TIME (MIN)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
RNP RWY 18R(AR)	HM	GAYHA	Y	271(262.5)	1.0	R	-13 000 +6 000	-230	35°13'22.4"N 128°37'54.4"E	-	RNP 0.3	1 MIN (Outbound timing)
	HM	PEDLO	Y	273(264.1)	1.0	R	-13 000 +6 000	-230	34°59'23.1"N 129°08'15.3"E	-	RNP 0.3	1 Min (Outbound timing)

RF arc center Identifier		Coordinates
ARC01		35°12'28.1"N 128°54'35.1"E