
VISUAL APPROACH CHART - ICAO

AERODROME ELEV 13 FT
HEIGHTS RELATED TO
THR RWY 18R ELEV 13 FT

GIMHAE	APP	125.5	135.7
GIMHAE	TWR	118.1	118.45


BUSAN/Gimhae Intl(RKPK)

TUSRA Visual
RWY 18R

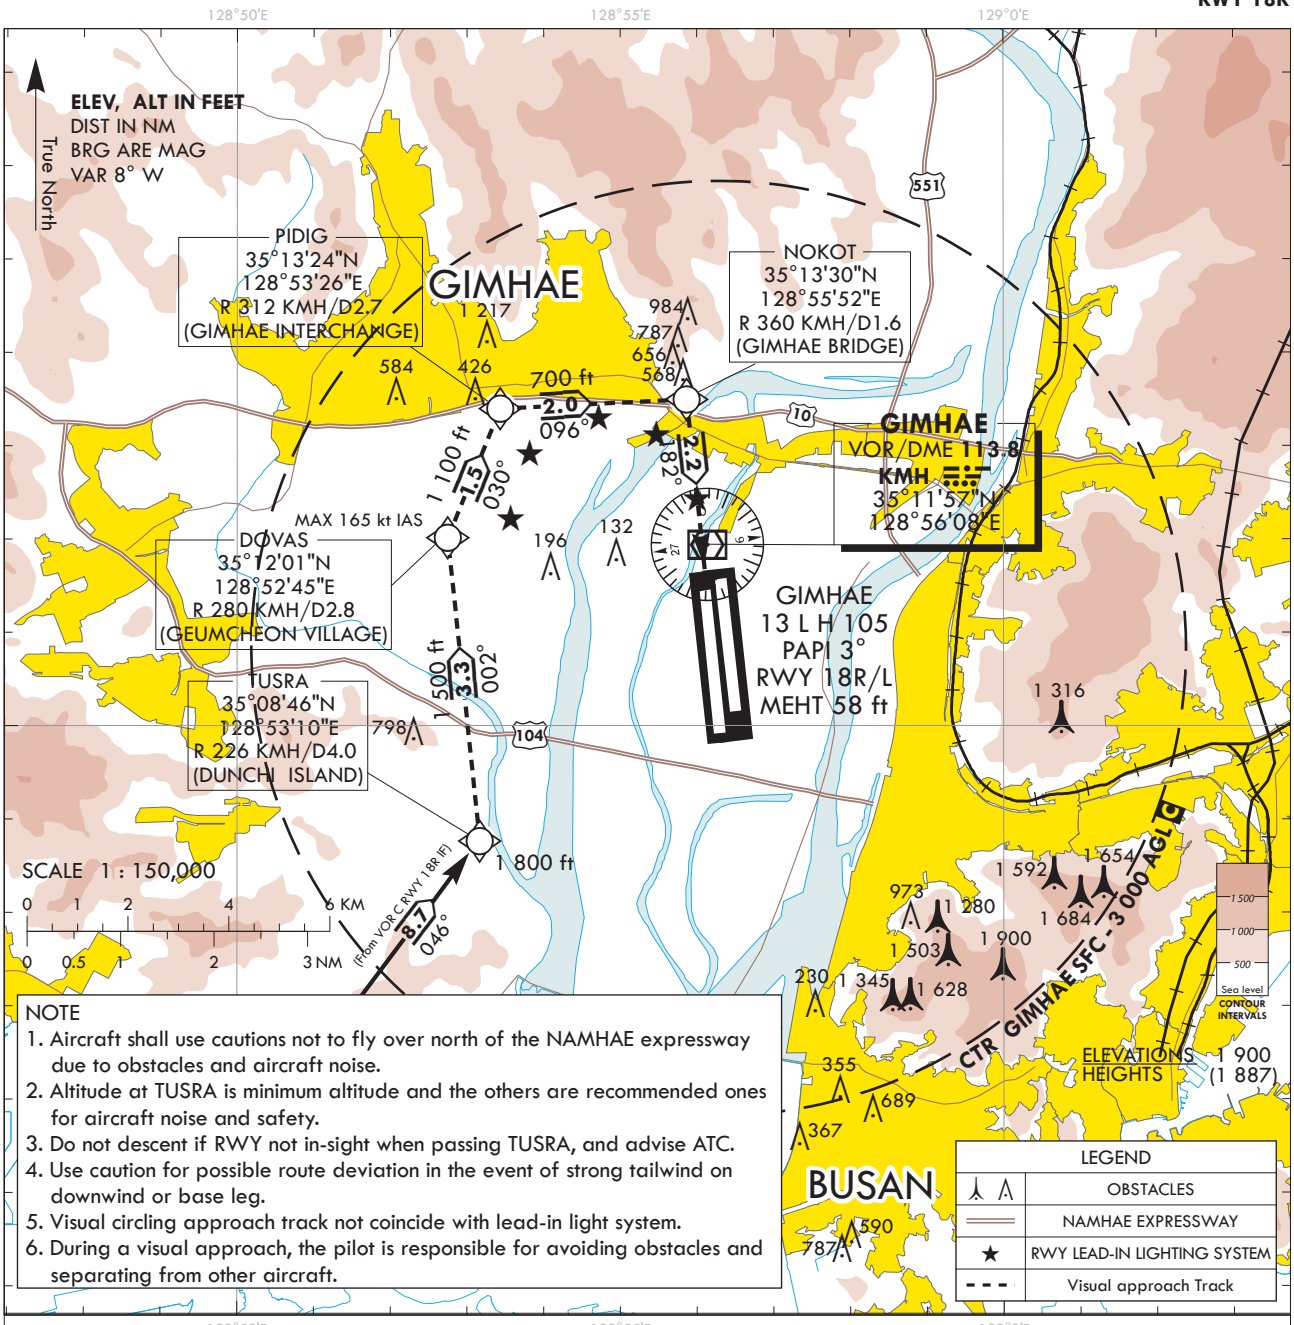

NOTE
1. Aircraft shall use cautions not to fly over north of the NAMHAE expressway due to obstacles and aircraft noise.
2. Altitude at TUSRA is minimum altitude and the others are recommended ones for aircraft noise and safety.
3. Do not descent if RWY not in-sight when passing TUSRA, and advise ATC.
4. Use caution for possible route deviation in the event of strong tailwind on downwind or base leg.
5. Visual circling approach track not coincide with lead-in light system.
6. During a visual approach, the pilot is responsible for avoiding obstacles and separating from other aircraft.

VISUAL PROCEDURE

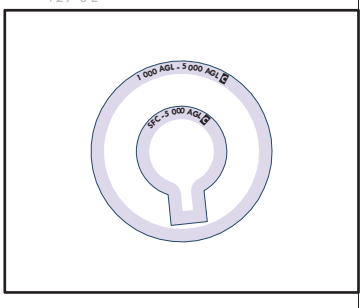

WEATHER MINIMUMS : CEILING 1 800 ft, VISIBILITY 5 km

GO-AROUND PROCEDURE : In the event of a go-around,
1. Before passing DOVAS : Fly HDG 310, climb to 6 000 ft then RADAR vector.
2. After passing DOVAS : Climb to 6 000 ft on the visual circling track to RWY 18R until receiving ATC instructions. Remain south of the NAMHAE expressway at all time.

GENERAL INFORMATION

1. This visual procedure is performed after runway in-sight during a VOR C RWY 18R approach.
2. RNAV is lateral guidance reference only and if unable to maintain visual contact with preceding aircraft or visual references, maintain 1 800 ft and report ATC as practical as possible.
3. NON-RNAV equipped aircraft may fly this procedure by referencing visual references.
4. Aircraft may proceed visually via depicted visual track after passing TUSRA at or 1 800 ft then proceed to DOVAS then PIDIG then NOKOT then RWY 18R.
5. Use caution not to inadvertently land on 18L.


Change : Information of visual approach chart and note.

VISUAL APPROACH CHART - ICAO

AD ELEV **13** ft
HEIGHTS RELATED TO AD ELEV

GIMHAE	APP	125.5	364.0
	DEP	125.5	363.8
GIMHAE	TWR	118.1	118.450

BUSAN/Gimhae

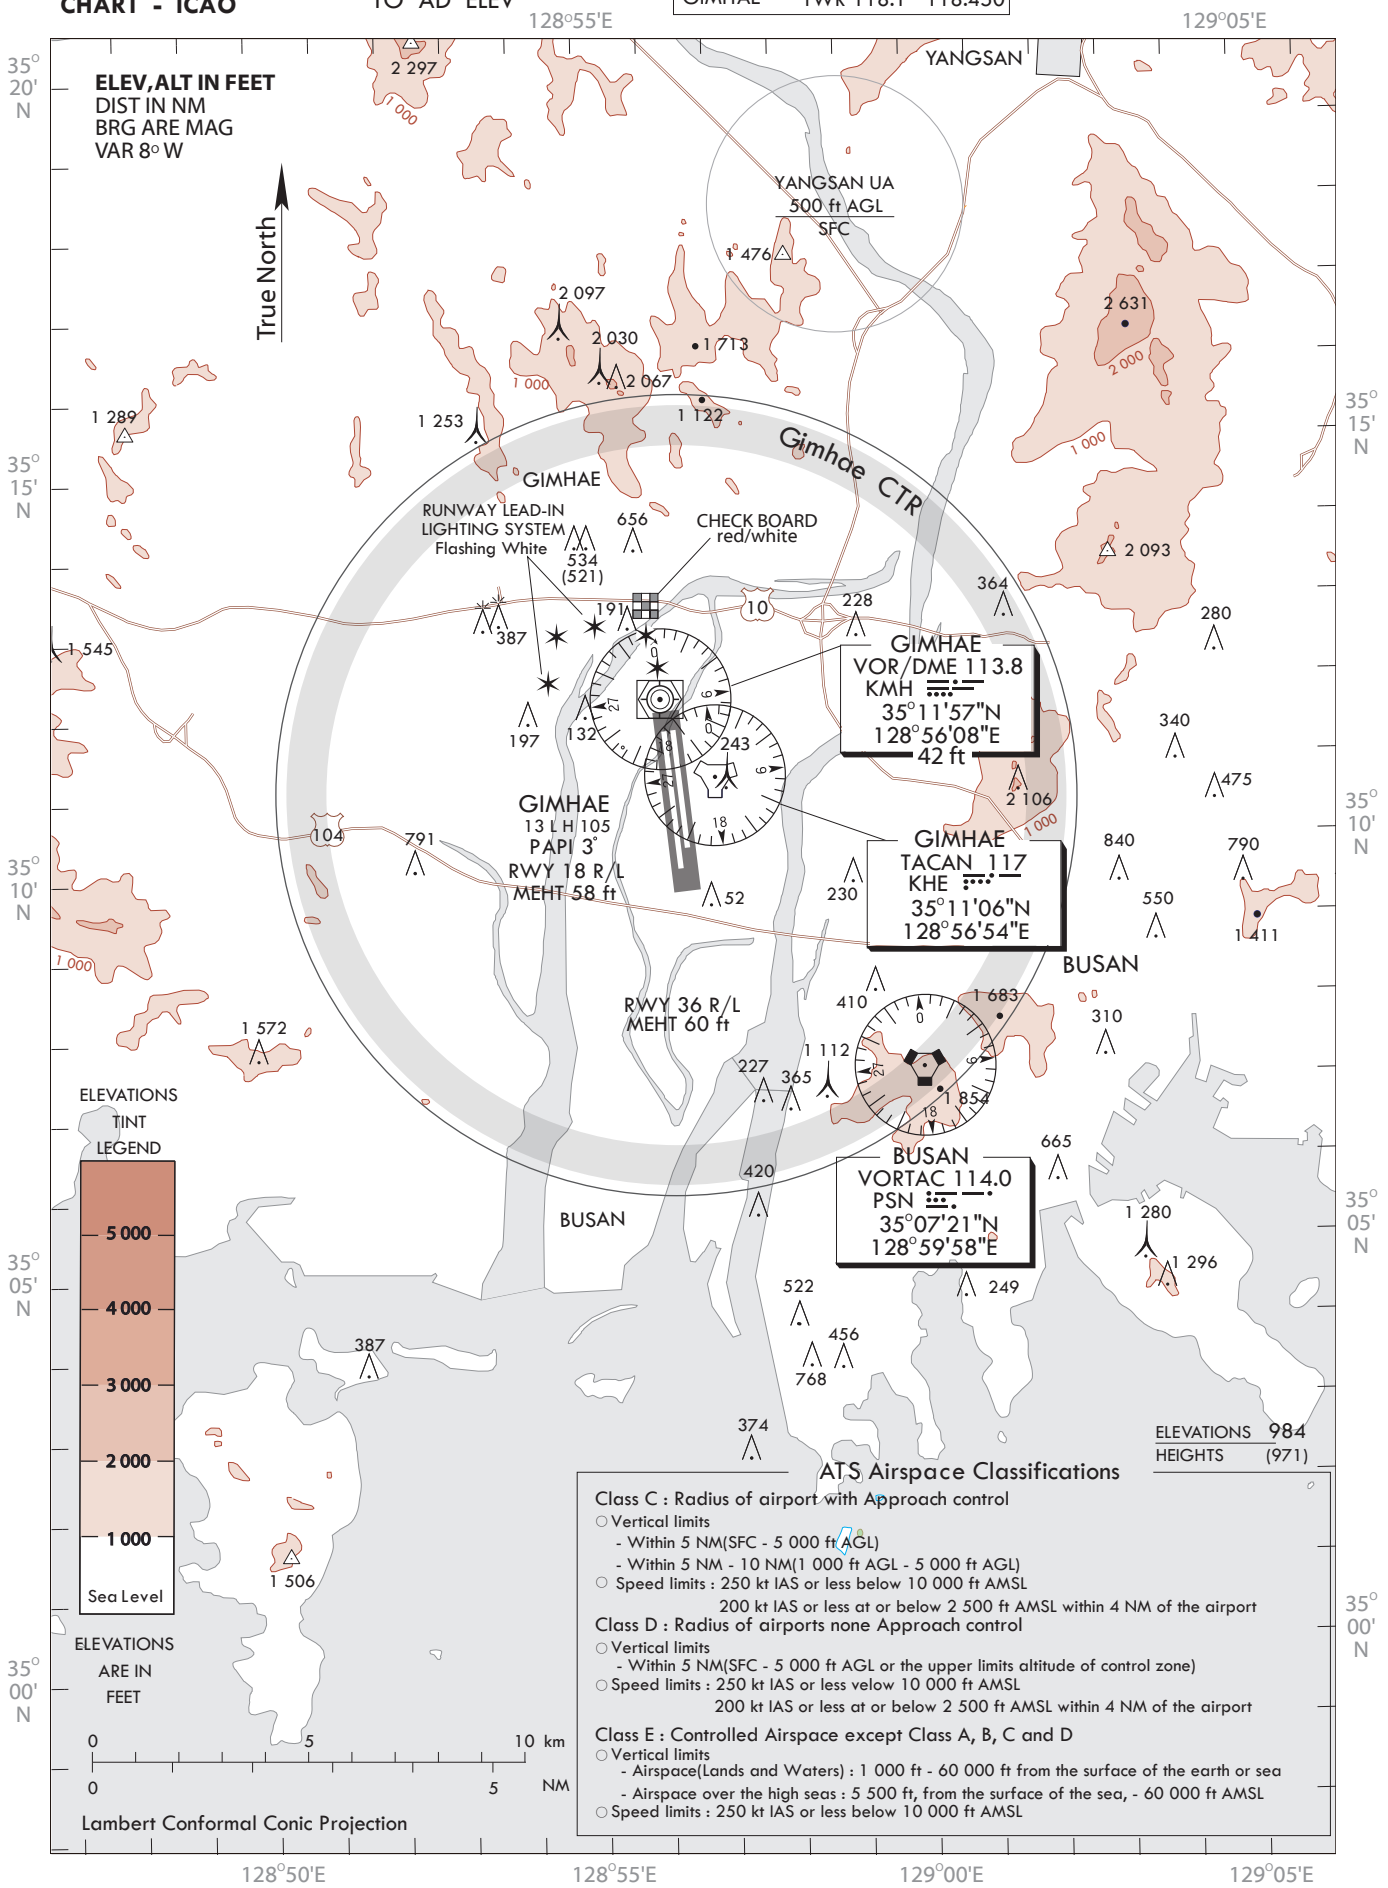

ATS Airspace Classifications

Class C : Radius of airport with Approach control
- Vertical limits
  - Within 5 NM(SFC - 5 000 ft AGL)
  - Within 5 NM - 10 NM(1 000 ft AGL - 5 000 ft AGL)
- Speed limits : 250 kt IAS or less below 10 000 ft AMSL
  200 kt IAS or less at or below 2 500 ft AMSL within 4 NM of the airport

Class D : Radius of airports none Approach control
- Vertical limits
  - Within 5 NM(SFC - 5 000 ft AGL or the upper limits altitude of control zone)
- Speed limits : 250 kt IAS or less velow 10 000 ft AMSL
  200 kt IAS or less at or below 2 500 ft AMSL within 4 NM of the airport

Class E : Controlled Airspace except Class A, B, C and D
- Vertical limits
  - Airspace(Lands and Waters) : 1 000 ft - 60 000 ft from the surface of the earth or sea
  - Airspace over the high seas : 5 500 ft, from the surface of the sea, - 60 000 ft AMSL
- Speed limits : 250 kt IAS or less below 10 000 ft AMSL