INSTRUMENT APPROACH CHART - ICAO

Note : Approach ICAO Flight Procedures.

AERODROME ELEV 23 ft
HEIGHTS RELATED TO
THR RWY 15L - ELEV 23 ft

SEOUL	APP	119.75
		121.35
INCHEON	TWR	118.2
		118.8

SEOUL/Incheon Intl(RKSI)

ILS Z or LOC Z RWY 15L
CAT II & III

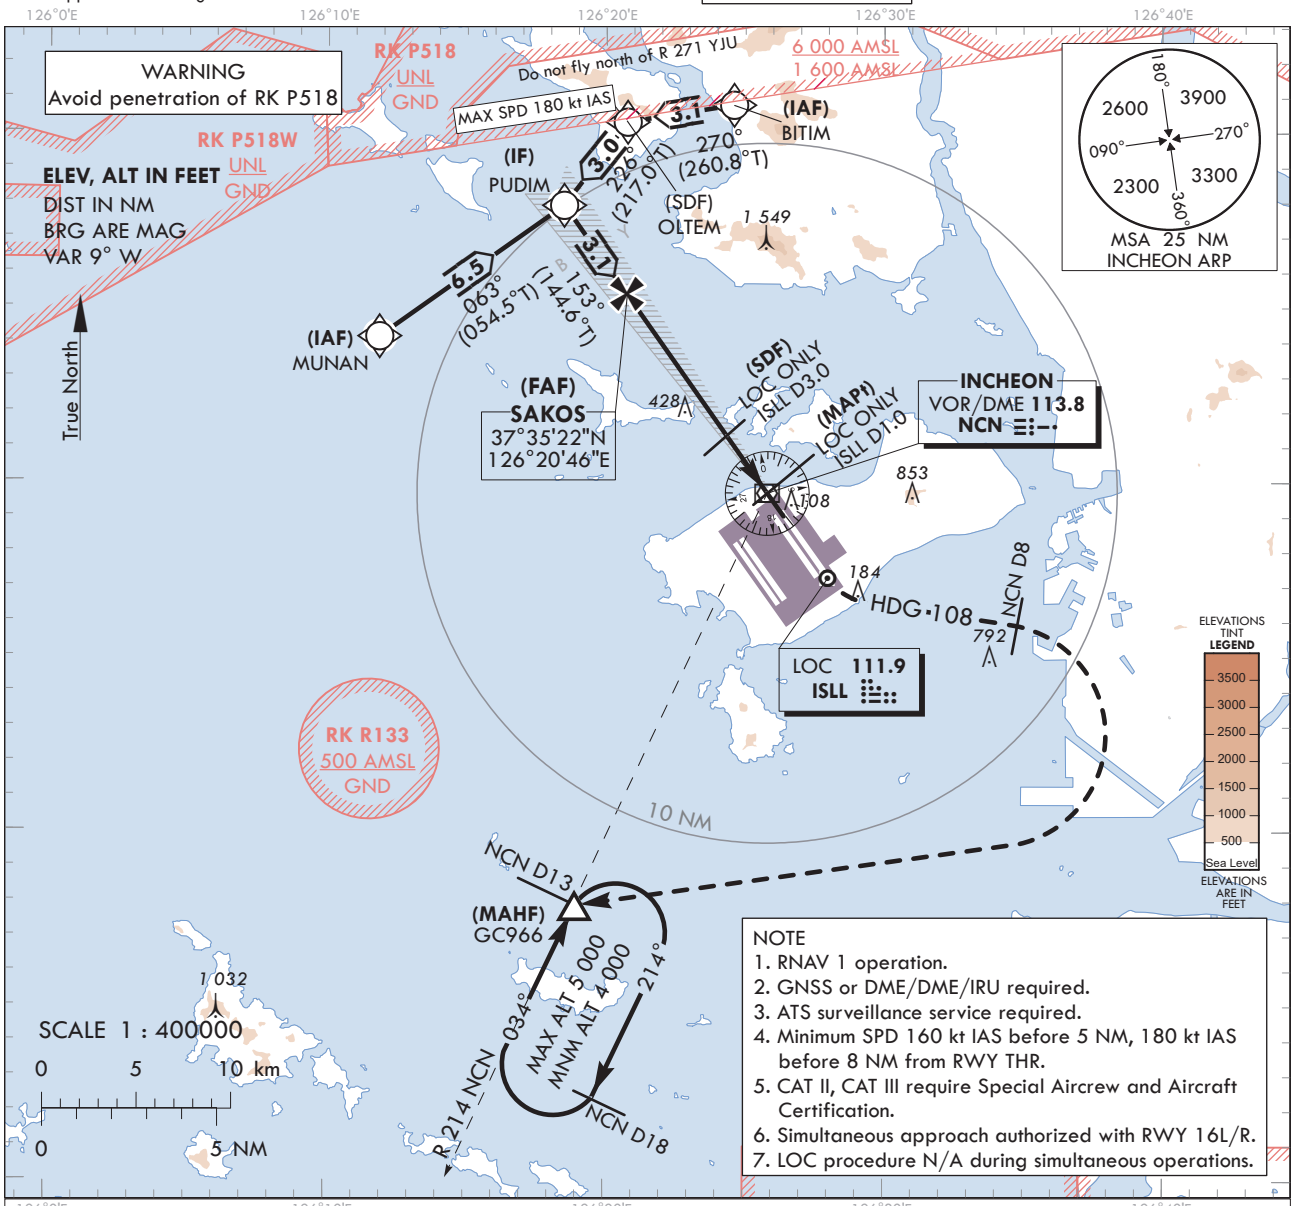

NOTE
1. RNAV 1 operation.
2. GNSS or DME/DME/IRU required.
3. ATS surveillance service required.
4. Minimum SPD 160 kt IAS before 5 NM, 180 kt IAS before 8 NM from RWY THR.
5. CAT II, CAT III require Special Aircrew and Aircraft Certification.
6. Simultaneous approach authorized with RWY 16L/R.
7. LOC procedure N/A during simultaneous operations.

TRANSITION ALT	14 000
TRANSITION LVL	FL 140

RECOMMENDED PROFILE (LOC ONLY)	DME ISLL	7	6	5	4	3	2
Final Approach Gradient 5.42%, 329 ft/NM(FAF-SDF) 5.26% 319 ft/NM(SDF-THR)	ALT(HGT)	2 327 (2 304)	1 997 (1 974)	1 668 (1 645)	1 339 (1 323)	1 014 (991)	683 (660)

MISSED APPROACH
Fly RWY heading, climb to 4 000 ft. At 720 ft, turn left heading 108. At NCN 8 DME, turn right direct to GC966. Hold as published.
Do not turn before passing MAPt.

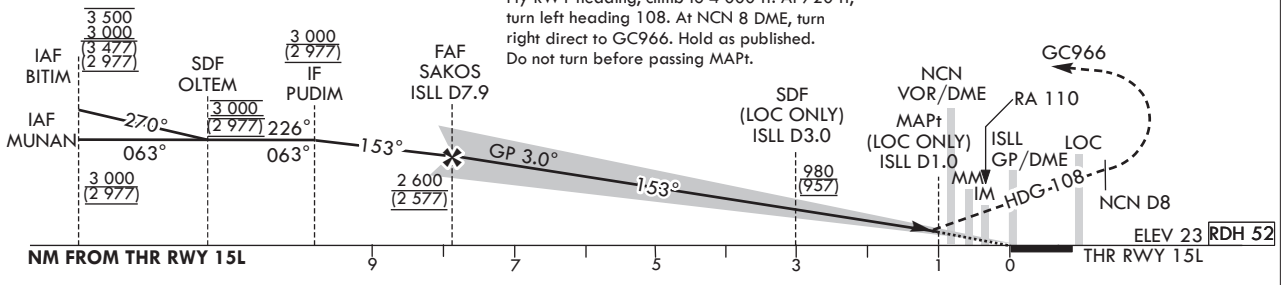

OCA (H)		A	B	C	D
Straight-in Approach	CAT-I	223 (200)			
	LOC	380 (357)			
	CAT II	123 (100)			
	CAT III	-			

	Knots	60	90	120	150	180
Rate of descent	V/V fpm	318	478	637	796	955

* Timing Not authorized for defining MAPt.
* Circling Not authorized.

Change : Establishment of rate of descent.

SEOUL/Incheon Intl(RKSI)
ILS Z or LOC Z RWY 15L
CAT II & III

AERONAUTICAL DATA TABULATION

ILS Z/LOC Z Approach to RWY 15L from MUNAN to PUDIM(IF)	
Fix / Point	Coordinates
MUNAN(IAF)	37°34'09.3"N 126°11'53.0"E
PUDIM(IF)	37°37'54.2"N 126°18'30.0"E

ILS Z/LOC Z Approach to RWY 15L from BITIM to PUDIM(IF)	
Fix / Point	Coordinates
BITIM(IAF)	37°40'48.0"N 126°24'36.1"E
OLTEM(SDF)	37°40'18.2"N 126°20'46.3"E
PUDIM(IF)	37°37'54.2"N 126°18'30.0"E

ILS Z/LOC Z Approach to RWY 15L from PUDIM(IF) to MAHF		
Fix / Point		Coordinates
SAKOS(FAF)	BRG 153.47°/7.92NM ISLL	37°35'22.4"N 126°20'45.7"E
D3.0 ISLL(SDF) (LOC ONLY)	BRG 153.47°/3.00 NM ISLL	37°31'21.2"N 126°24'20.8"E
D1.0 ISLL(MAPt) (LOC ONLY)	BRG 153.47°/1.00 NM ISLL	37°29'43.1"N 126°25'48.2"E
NCN VOR/DME		37°29'41.7"N 126°25'49.2"E
THR RWY 15L		37°29'02.20"N 126°26'24.56"E
ISLL DME		37°28'56.4"N 126°26'35.6"E
Climb to 720 ft	HDG 153	-
D8 NCN	HDG 108	-
GC966	BRG 213.75°/13.00 NM NCN	37°17'53.0"N 126°18'58.0"E

INSTRUMENT APPROACH CHART - ICAO

Note : Approach under ICAO Flight Procedures.

AERODROME ELEV 23 ft
HEIGHTS RELATED TO
THR RWY 15L - ELEV **23** ft

SEOUL	APP	119.75 121.35
INCHEON	TWR	118.2 118.8

SEOUL/Incheon Intl(RKSI)

ILS Y or LOC Y RWY 15L
CAT II & III

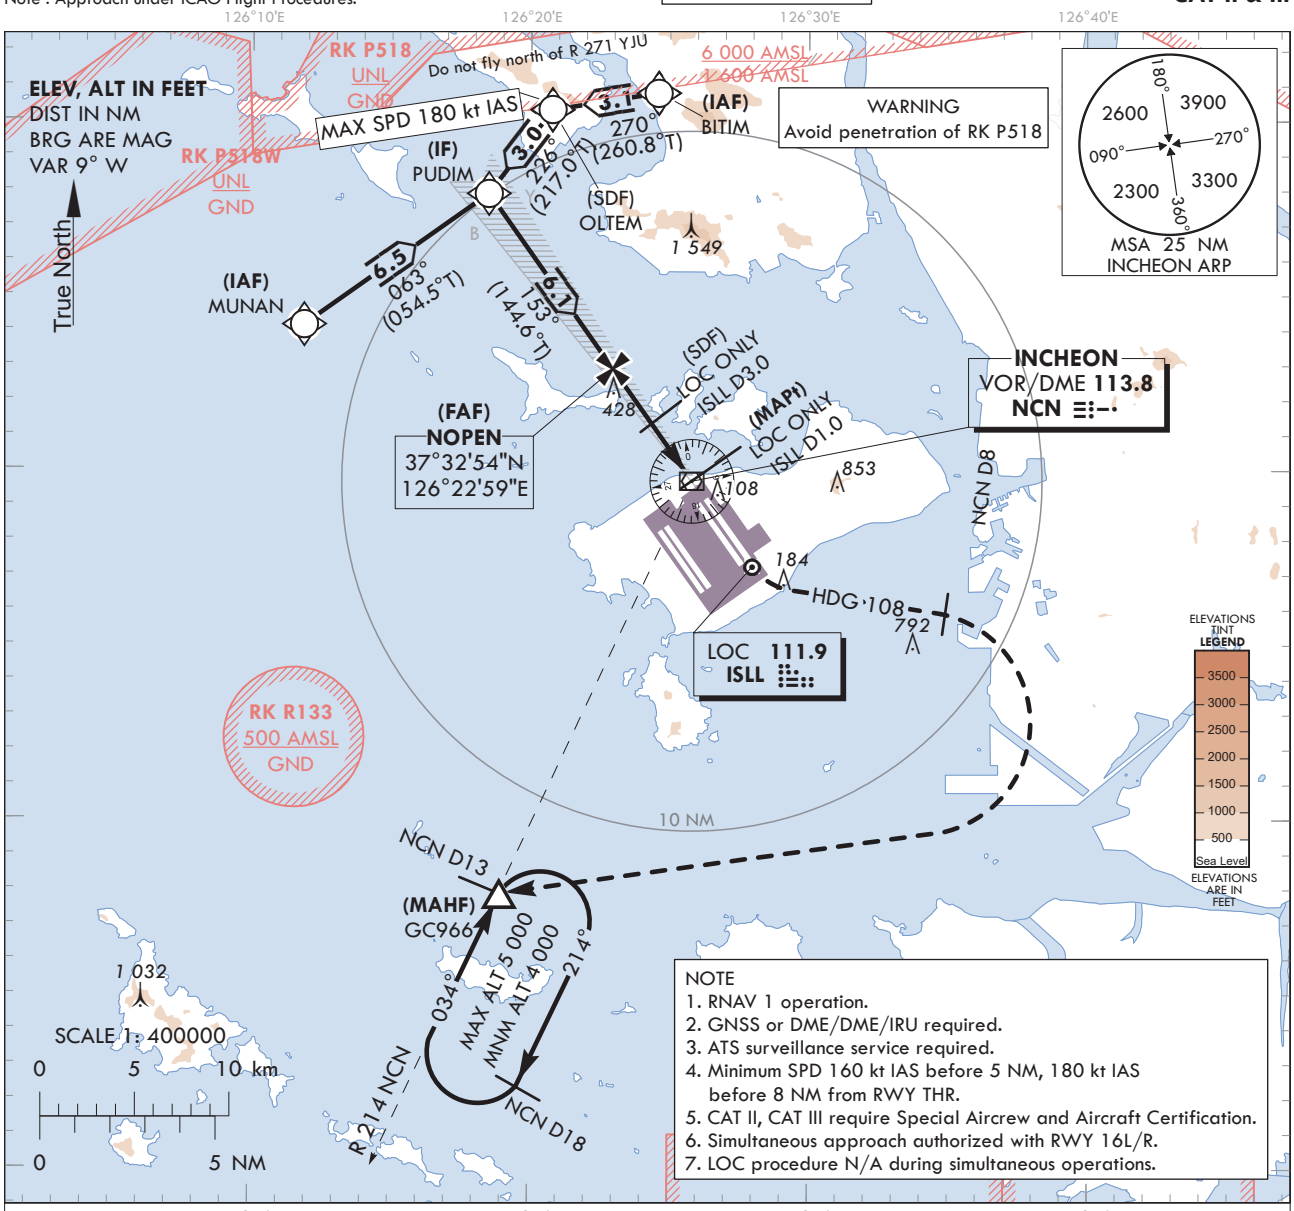

MISSED APPROACH
Fly RWY heading, climb to 4 000 ft. At 720 ft, turn left heading 108. At NCN 8 DME, turn right direct to GC966. Hold as published.
Do not turn before passing MAPt.

RECOMMENDED PROFILE (LOC ONLY)	DME ISLL	4	3	2
Final Approach Gradient 5.43%, 330 ft/NM(FAF-SDF) 5.26%, 319 ft/NM(SDF-THR)	ALT(HGT)	1 341 (1 318)	1 011 (998)	681 (658)

TRANSITION ALT 14 000
TRANSITION LVL FL 140

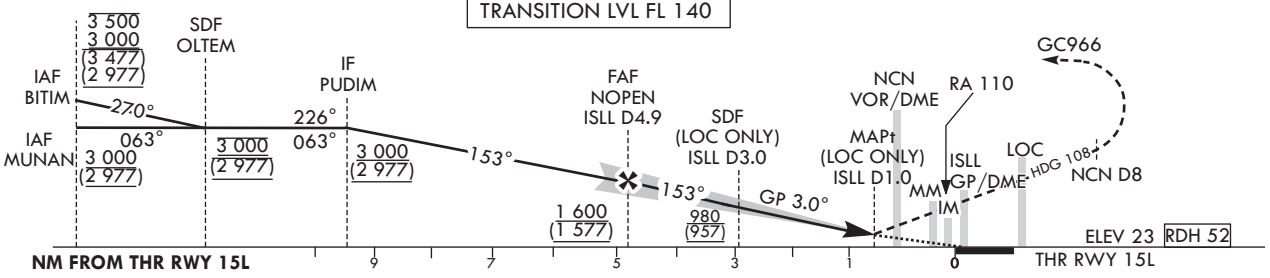

OCA (H)		A	B	C	D
Straight-in Approach	CAT-I	223 (200)			
	LOC	380 (357)			
	CAT II	123 (100)			
	CAT III	-			

	Knots	60	90	120	150	180
Rate of descent	V/V fpm	318	478	637	796	955

* Timing Not authorized for defining MAPt.
* Circling Not authorized.

Change : Establishment of rate of descent.

SEOUL/Incheon Intl(RKSI)
ILS Y or LOC Y RWY 15L
CAT II & III

AERONAUTICAL DATA TABULATION

ILS Y/LOC Y Approach to RWY 15L from MUNAN to PUDIM(IF)	
Fix / Point	Coordinates
MUNAN(IAF)	37°34'09.3"N 126°11'53.0"E
PUDIM(IF)	37°37'54.2"N 126°18'30.0"E

ILS Y/LOC Y Approach to RWY 15L from BITIM to PUDIM(IF)	
Fix / Point	Coordinates
BITIM(IAF)	37°40'48.0"N 126°24'36.1"E
OLTEM(SDF)	37°40'18.2"N 126°20'46.3"E
PUDIM(IF)	37°37'54.2"N 126°18'30.0"E

ILS Y/LOC Y Approach to RWY 15L from PUDIM(IF) to MAHF		
Fix / Point		Coordinates
NOPEN(FAF)	BRG 153.49°/4.89 NM ISLL	37°32'53.5"N 126°22'58.5"E
D3.0 ISLL (SDF LOC ONLY)	BRG 153.49°/3.00 NM ISLL	37°31'21.2"N 126°24'20.8"E
D1.0 ISLL (MAPt LOC ONLY)	BRG 153.49°/1.00 NM ISLL	37°29'43.1"N 126°25'48.2"E
NCN VOR/DME		37°29'41.7"N 126°25'49.2"E
THR RWY 15L		37°29'02.20"N 126°26'24.56"E
ISLL DME		37°28'56.4"N 126°26'35.6"E
Climb to 720 ft	HDG 153	-
D8 NCN	HDG 108	-
GC966	BRG 213.75°/13.00 NM NCN	37°17'53.0"N 126°18'58.0"E

INSTRUMENT APPROACH CHART - ICAO

Note : Approach under ICAO Flight Procedures.

AERODROME ELEV 23 ft
HEIGHTS RELATED TO
THR RWY 15L - ELEV **23** ft

SEOUL	APP	119.75 121.35
INCHEON	TWR	118.2 118.8

SEOUL/Incheon Intl(RKSI)

RNP RWY 15L

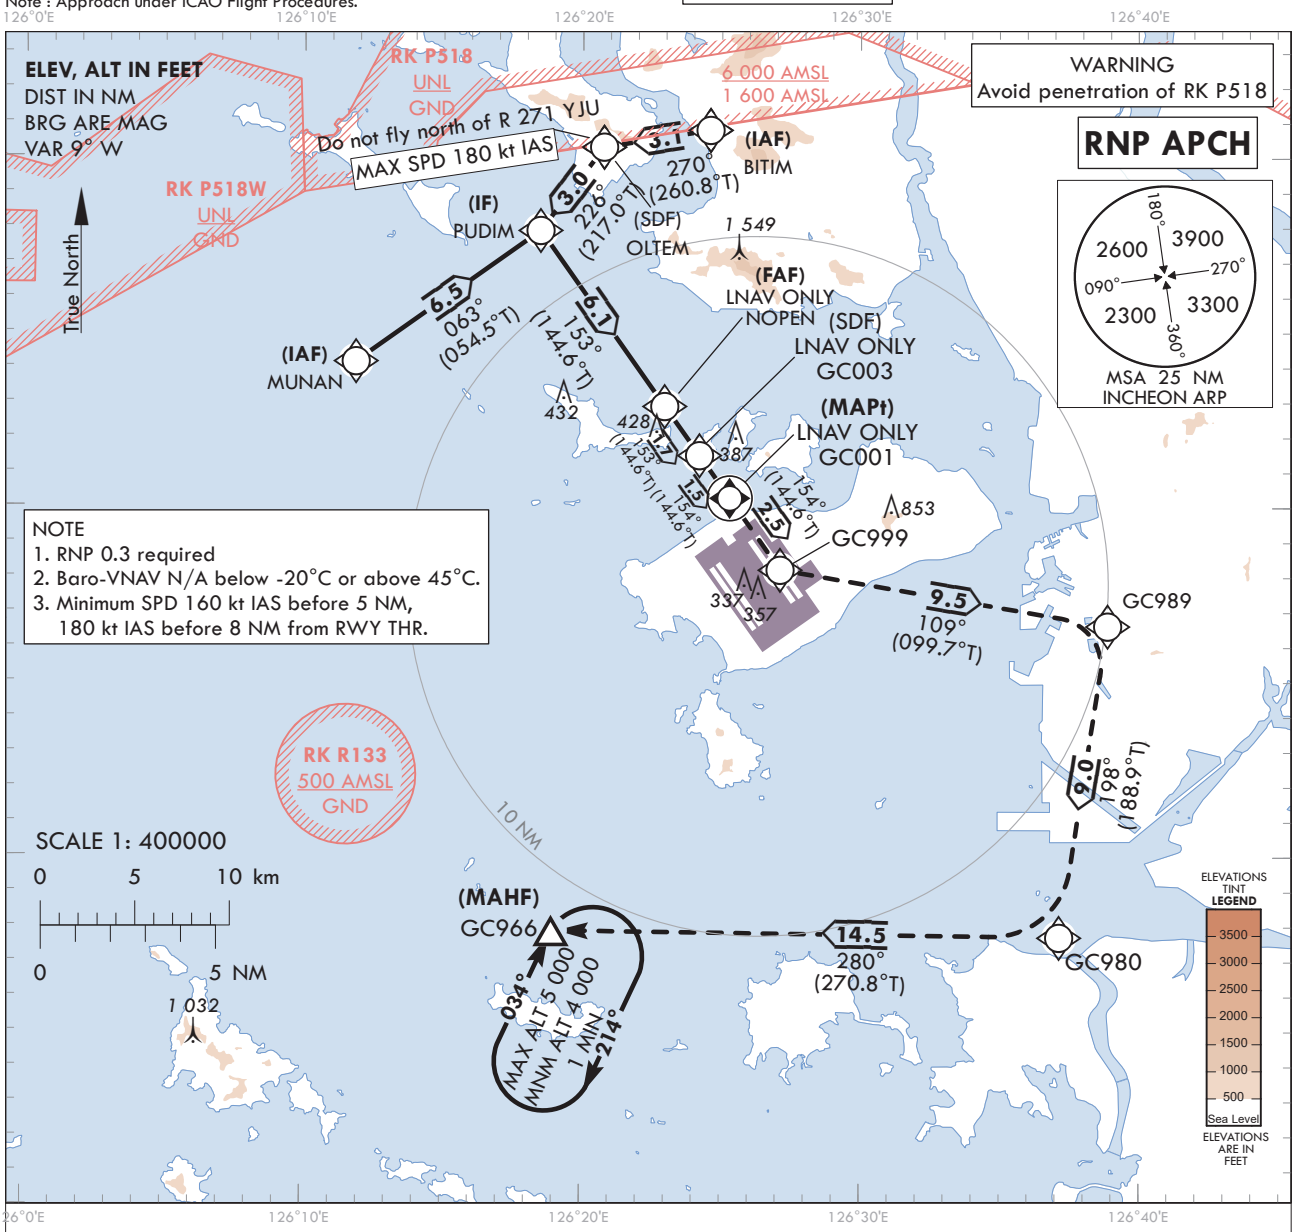

TRANSITION ALT 14 000
TRANSITION LVL FL 140

MISSED APPROACH
Climb to 4 000 ft. Track to GC999, GC989, GC980 and GC966. Hold as published.

NOTE
1. Missed approach turn limited to 210 kt IAS maximum at GC999 and GC989.

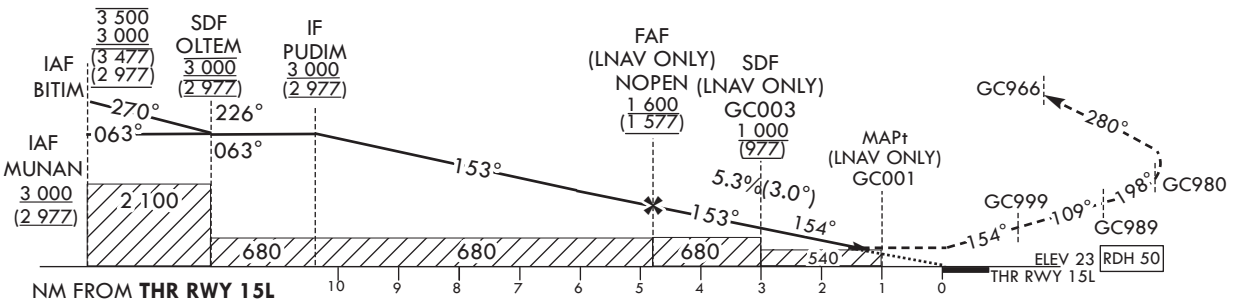

OCA (H)		A	B	C	D
Straight-in Approach	LNAV/VNAV	460 (437)			
	LNAV	540 (517)			

	Knots	60	90	120	150	180
Rate of descent	V/V fpm	324	485	647	809	971

* Timing Not authorized for defining MAPt.
* Circling Not authorized.

Change : Information of course/track for OLTEM, GC001, GC999, GC989, GC980, GC966.

SEOUL/Incheon Intl(RKSI)
RNP RWY 15L

AERONAUTICAL DATA TABULATION

Instrument Approach Procedure Coding Tables

RNP RWY 15L - via MUNAN(IAF) to GC966(MAHF)

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	MUNAN	-	-	-	-	+3 000	-	37°34'09.3"N 126°11'53.0"E	-	RNP APCH	IAF
002	TF	PUDIM	-	063 (054.5)	6.5	-	+3 000	-	37°37'54.2"N 126°18'30.0"E	-	RNP APCH	IF
003	TF	NOPEN	-	153 (144.6)	6.1	-	+1 600	-	37°32'53.5"N 126°22'58.5"E	-	RNP APCH	FAF
004	TF	GC003	-	153 (144.6)	1.7	-	+1 000	-	37°31'29.2"N 126°24'13.7"E	-	RNP APCH	SDF
005	TF	GC001	Y	154 (144.6)	1.5	-	+540	-	37°30'15.70"N 126°25'19.14"E	-3.05/50	RNP APCH	MAPt
006	TF	GC999	-	154 (144.6)	2.5	-	-	-210	37°28'13.2"N 126°27'08.2"E	-	RNP APCH	-
007	TF	GC989	-	109 (099.7)	9.5	-	-	-210	37°26'36.8"N 126°38'53.7"E	-	RNP APCH	-
008	TF	GC980	-	198 (188.9)	9.0	-	-	-	37°17'42.5"N 126°37'09.6"E	-	RNP APCH	-
009	TF	GC966	-	280 (270.8)	14.5	-	+4 000	-	37°17'53.0"N 126°18'58.0"E	-	RNP APCH	
010	HM	GC966	Y	034 (024.8)	-	R	-5 000 +4 000	-	37°17'53.0"N 126°18'58.0"E	-	RNP APCH	1 min (Outbound timing)

RNP RWY 15L - via BITIM(IAF) to GC966(MAHF)

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	BITIM	-	-	-	-	-3 500 +3 000	-	37°40'48.0"N 126°24'36.1"E	-	RNP APCH	IAF
002	TF	OLTEM	-	270 (260.8)	3.1	-	@3 000	-180	37°40'18.2"N 126°20'46.3"E	-	RNP APCH	SDF
003	TF	PUDIM	-	226 (217.0)	3.0	-	+3 000	-	37°37'54.2"N 126°18'30.0"E	-	RNP APCH	IF
004	TF	NOPEN	-	153 (144.6)	6.1	-	+1 600	-	37°32'53.5"N 126°22'58.5"E	-	RNP APCH	FAF
005	TF	GC003	-	153 (144.6)	1.7	-	+1 000	-	37°31'29.2"N 126°24'13.7"E	-	RNP APCH	SDF
006	TF	GC001	Y	154 (144.6)	1.5	-	+540	-	37°30'15.70"N 126°25'19.14"E	-3.05/50	RNP APCH	MAPt
007	TF	GC999	-	154 (144.6)	2.5	-	-	-210	37°28'13.2"N 126°27'08.2"E	-	RNP APCH	-
008	TF	GC989	-	109 (099.7)	9.5	-	-	-210	37°26'36.8"N 126°38'53.7"E	-	RNP APCH	-
009	TF	GC980	-	198 (188.9)	9.0	-	-	-	37°17'42.5"N 126°37'09.6"E	-	RNP APCH	-
010	TF	GC966	-	280 (270.8)	14.5	-	+4 000	-	37°17'53.0"N 126°18'58.0"E	-	RNP APCH	
011	HM	GC966	Y	034 (024.8)	-	R	-5 000 +4 000	-	37°17'53.0"N 126°18'58.0"E	-	RNP APCH	1 min (Outbound timing)

Change : Information of course/track for OLTEM, GC001, GC999, GC989, GC980, GC966.

INSTRUMENT APPROACH CHART - ICAO

Note : Approach under ICAO Flight Procedures.

AERODROME ELEV 23 ft
HEIGHTS RELATED TO
THR RWY 15L - ELEV **23** ft

SEOUL	APP	119.75
		121.35
INCHEON	TWR	118.2
		118.8

SEOUL/Incheon Intl(RKSI)

VOR RWY 15L

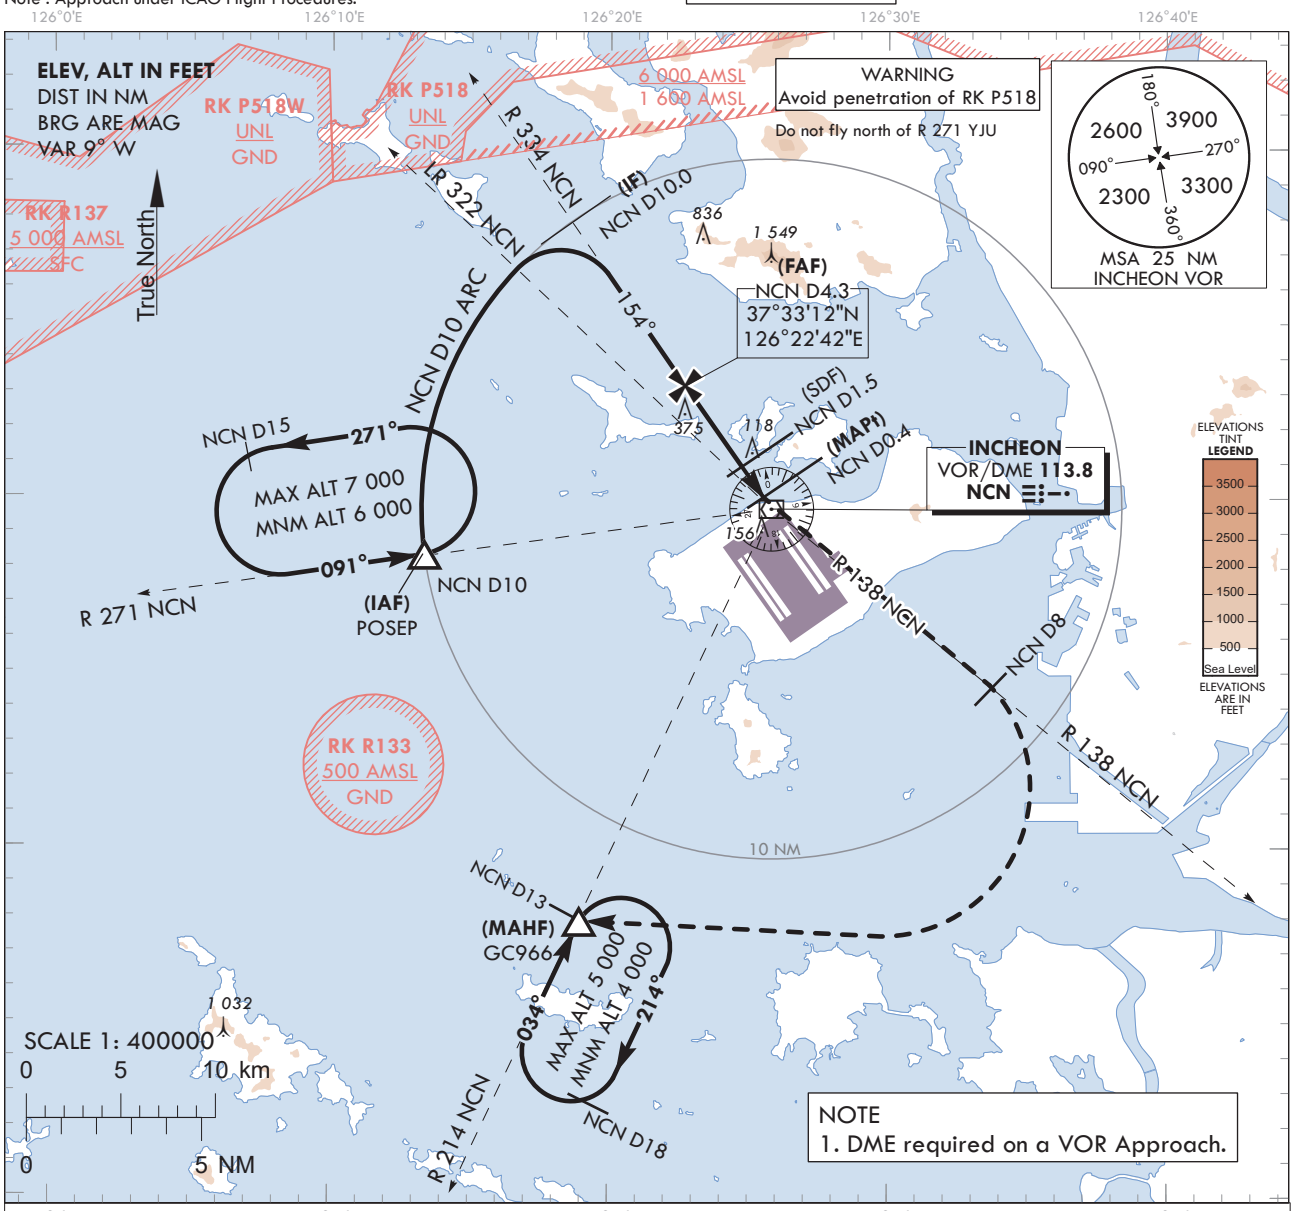

RECOMMENDED DESCENT PROFILE	DME NCN	3	2	1
Final Approach Gradient 5.2%(317.9 ft/NM) to SDF, 5.2%(318.3 ft/NM) to THR	ALT(HGT)	1 287(1 264)	969(946)	650(627)

TRANSITION ALT 14 000
TRANSITION LVL FL 140

MISSED APPROACH
Climb to 4 000 ft via NCN then turn left on R 138 NCN to 8 DME and turn right direct to GC966. Hold as published.

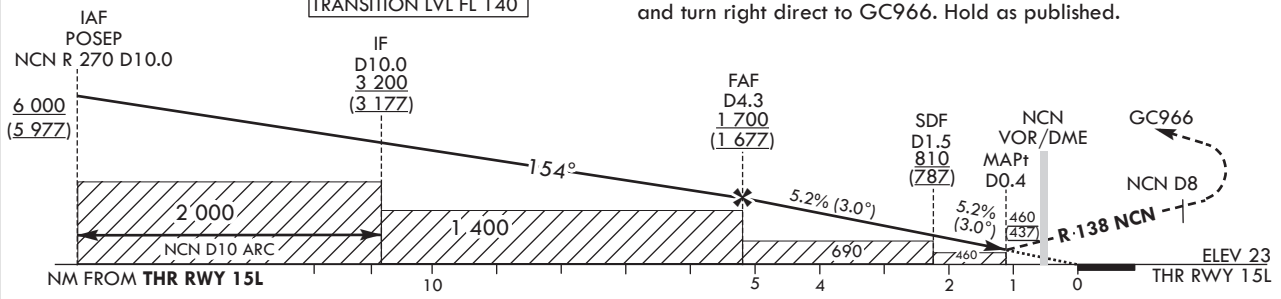

OCA (H)	A	B	C	D
Straight-in Approach	460 (437)			

	Knots	60	90	120	150	180
Rate of descent	V/V fpm	318	477	636	795	954

* Timing Not authorized for defining MAPt.
* Circling Not authorized.

Change : Information of radial and course/track.

SEOUL/Incheon Intl(RKSI)
VOR RWY 15L

AERONAUTICAL DATA TABULATION

VOR Approach to RWY 15L from POSEP			
Fix / Point		Coordinates	
POSEP(IAF)		37°28'21.8"N	126°13'22.0"E
D10 NCN(IF)	BRG 153.58°/10.00 NM NCN	37°37'52.4"N	126°18'33.7"E
D4.3 NCN(FAF)	BRG 153.58°/4.30 NM NCN	37°33'12.4"N	126°22'42.4"E
D1.5 NCN(SDF)	BRG 153.58°/1.50 NM NCN	37°30'55.0"N	126°24'44.2"E
D0.4 NCN(MAPt)	BRG 153.58°/0.40 NM NCN	37°30'01.0"N	126°25'32.1"E
NCN VOR/DME		37°29'41.7"N	126°25'49.2"E
THR RWY 15L	Final approach descent angle 2.99°(FAF - SDF)/3.00°(SDF - THR)	37°29'02.20"N	126°26'24.56"E
D8 NCN	R 138 NCN/8.00 NM NCN	37°24'40.1"N	126°33'39.1"E
GC966	BRG 213.75°/13.00 NM NCN	37°17'53.0"N	126°18'58.0"E

Change : Information of BRG for IF~MAPt, D8 NCN, GC966.

INSTRUMENT APPROACH CHART - ICAO

Note : Approach under ICAO Flight Procedures.

AERODROME ELEV 23 ft
HEIGHTS RELATED TO
THR RWY 15R - ELEV **23** ft

SEOUL	APP	119.75 121.35
INCHEON	TWR	118.2 118.8

SEOUL/Incheon Intl(RKSI)

ILS Z or LOC Z RWY 15R
CAT II & III

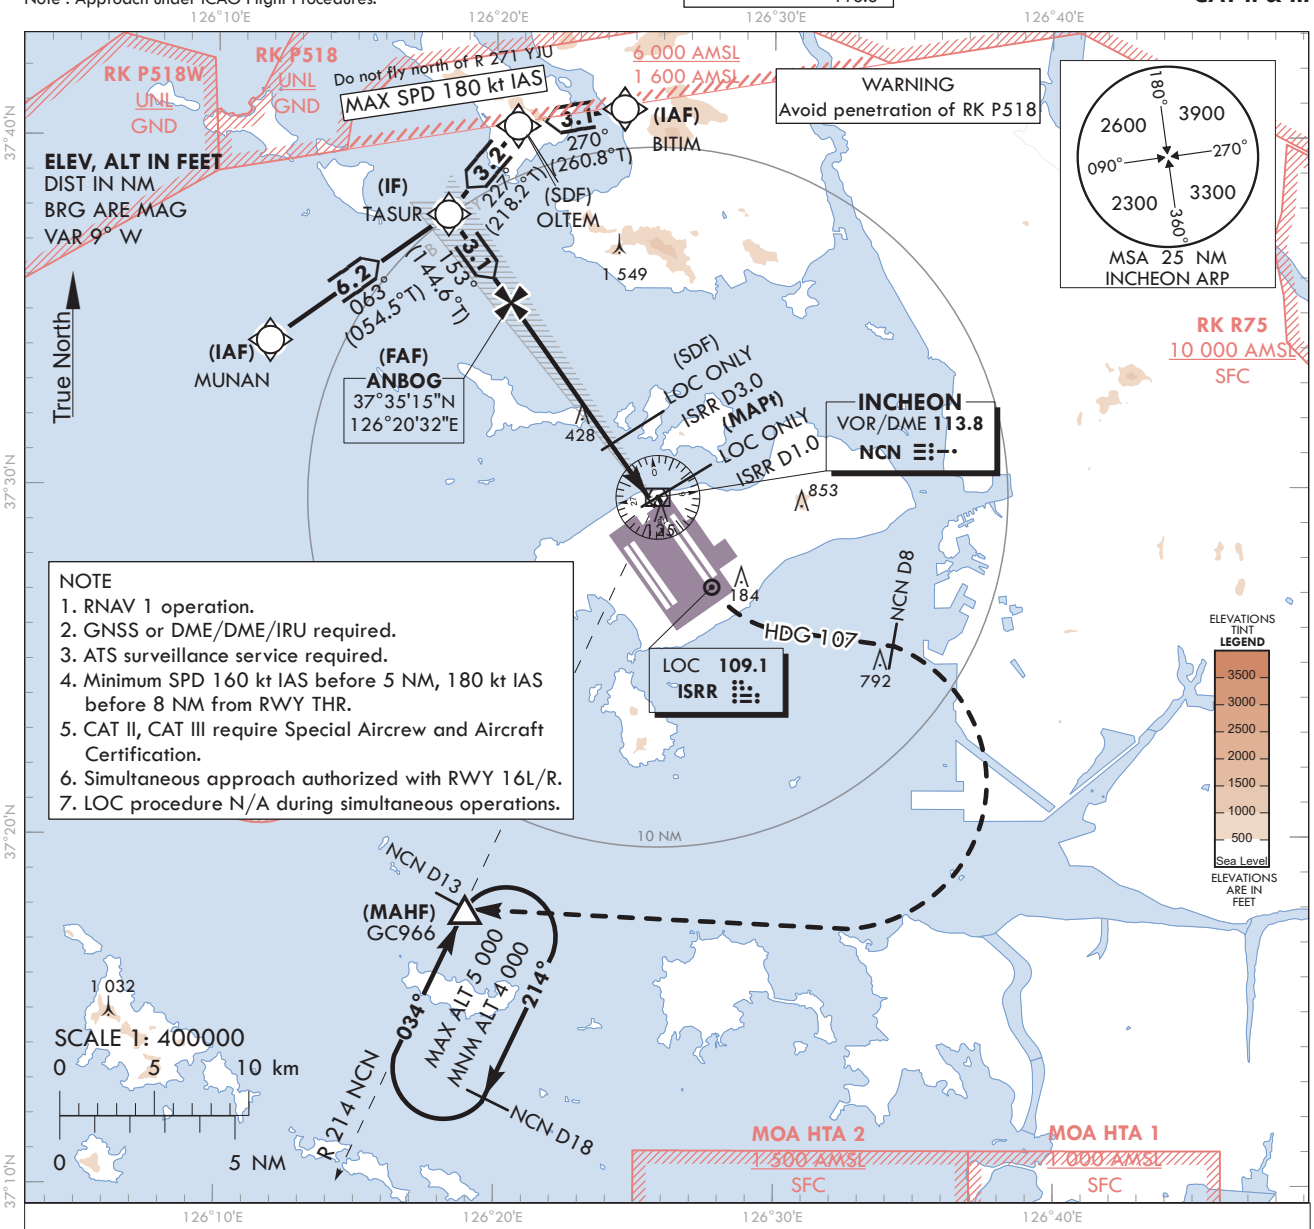

NOTE
1. RNAV 1 operation.
2. GNSS or DME/DME/IRU required.
3. ATS surveillance service required.
4. Minimum SPD 160 kt IAS before 5 NM, 180 kt IAS before 8 NM from RWY THR.
5. CAT II, CAT III require Special Aircrew and Aircraft Certification.
6. Simultaneous approach authorized with RWY 16L/R.
7. LOC procedure N/A during simultaneous operations.

MISSED APPROACH
Fly RWY heading, climb to 4 000 ft. At 720 ft, turn left heading 107. At NCN 8 DME, turn right direct to GC966. Hold as pulished. Do not turn before passing MAPt.

RECOMMENDED PROFILE (LOC ONLY)	DME ISRR	7	6	5	4	3	2
Final Approach Gradient 5.42%, 329 ft/NM(FAF-SDF) 5.26%, 319 ft/NM(SDF-THR)	ALT(HGT)	2 327 (2 304)	1 997 (1 974)	1 668 (1 645)	1 339 (1 323)	1 014 (991)	683 (660)

TRANSITION ALT 14 000
TRANSITION LVL FL 140

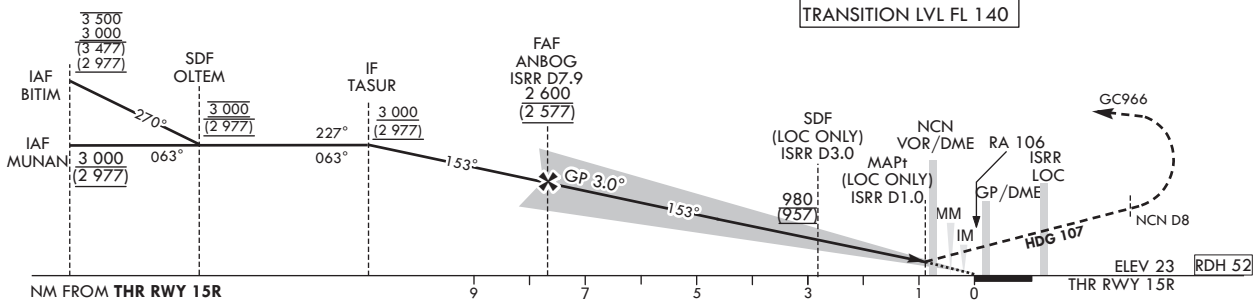

OCA (H)		A	B	C	D
Straight-in Approach	CAT-I	223 (200)			
	LOC	380 (357)			
	CAT II	123 (100)			
	CAT III	-			

	Knots	60	90	120	150	180
Rate of descent	V/V fpm	318	478	637	796	955

* Timing Not authorized for defining MAPt.
* Circling Not authorized.

Change : Amended ALT restriction.

SEOUL/Incheon Intl(RKSI)
ILS Z or LOC Z RWY 15R
CAT II & III

AERONAUTICAL DATA TABULATION

ILS Z/LOC Z Approach to RWY 15R from MUNAN to TASUR(IF)	
Fix / Point	Coordinates
MUNAN(IAF)	37°34'09.3"N 126°11'53.0"E
TASUR(IF)	37°37'46.4"N 126°18'16.2"E

ILS Z/LOC Z Approach to RWY 15R from BITIM to TASUR(IF)	
Fix / Point	Coordinates
BITIM(IAF)	37°40'48.0"N 126°24'36.1"E
OLTEM(SDF)	37°40'18.2"N 126°20'46.3"E
TASUR(IF)	37°37'46.4"N 126°18'16.2"E

ILS Z/LOC Z Approach to RWY 15R from TASUR(IF) to MAHF		
Fix / Point		Coordinates
ANBOG(FAF)	BRG 153.47°/7.92 NM ISRR	37°35'14.6"N 126°20'31.9"E
D3.0 ISRR (SDF LOC ONLY)	BRG 153.47°/3.00 NM ISRR	37°31'13.4"N 126°24'07.1"E
D1.0 ISRR (MAPt LOC ONLY)	BRG 153.47°/1.00 NM ISRR	37°29'35.4"N 126°25'34.4"E
NCN VOR/DME		37°29'41.7"N 126°25'49.2"E
THR RWY 15R		37°28'54.44"N 126°26'10.82"E
ISRR DME		37°28'48.7"N 126°26'21.9"E
Climb to 720 ft	HDG 153	-
D8 NCN	HDG 107	-
GC966	BRG 213.75°/13.00 NM NCN	37°17'53.0"N 126°18'58.0"E

INSTRUMENT APPROACH CHART - ICAO

Note : Approach under ICAO Flight Procedures.

AERODROME ELEV 23 ft
HEIGHTS RELATED TO
THR RWY 15R - ELEV **23** ft

SEOUL	APP	119.75
		121.35
INCHEON	TWR	118.2
		118.8

SEOUL/Incheon Intl(RKSI)

ILS Y or LOC Y RWY 15R
CAT II & III

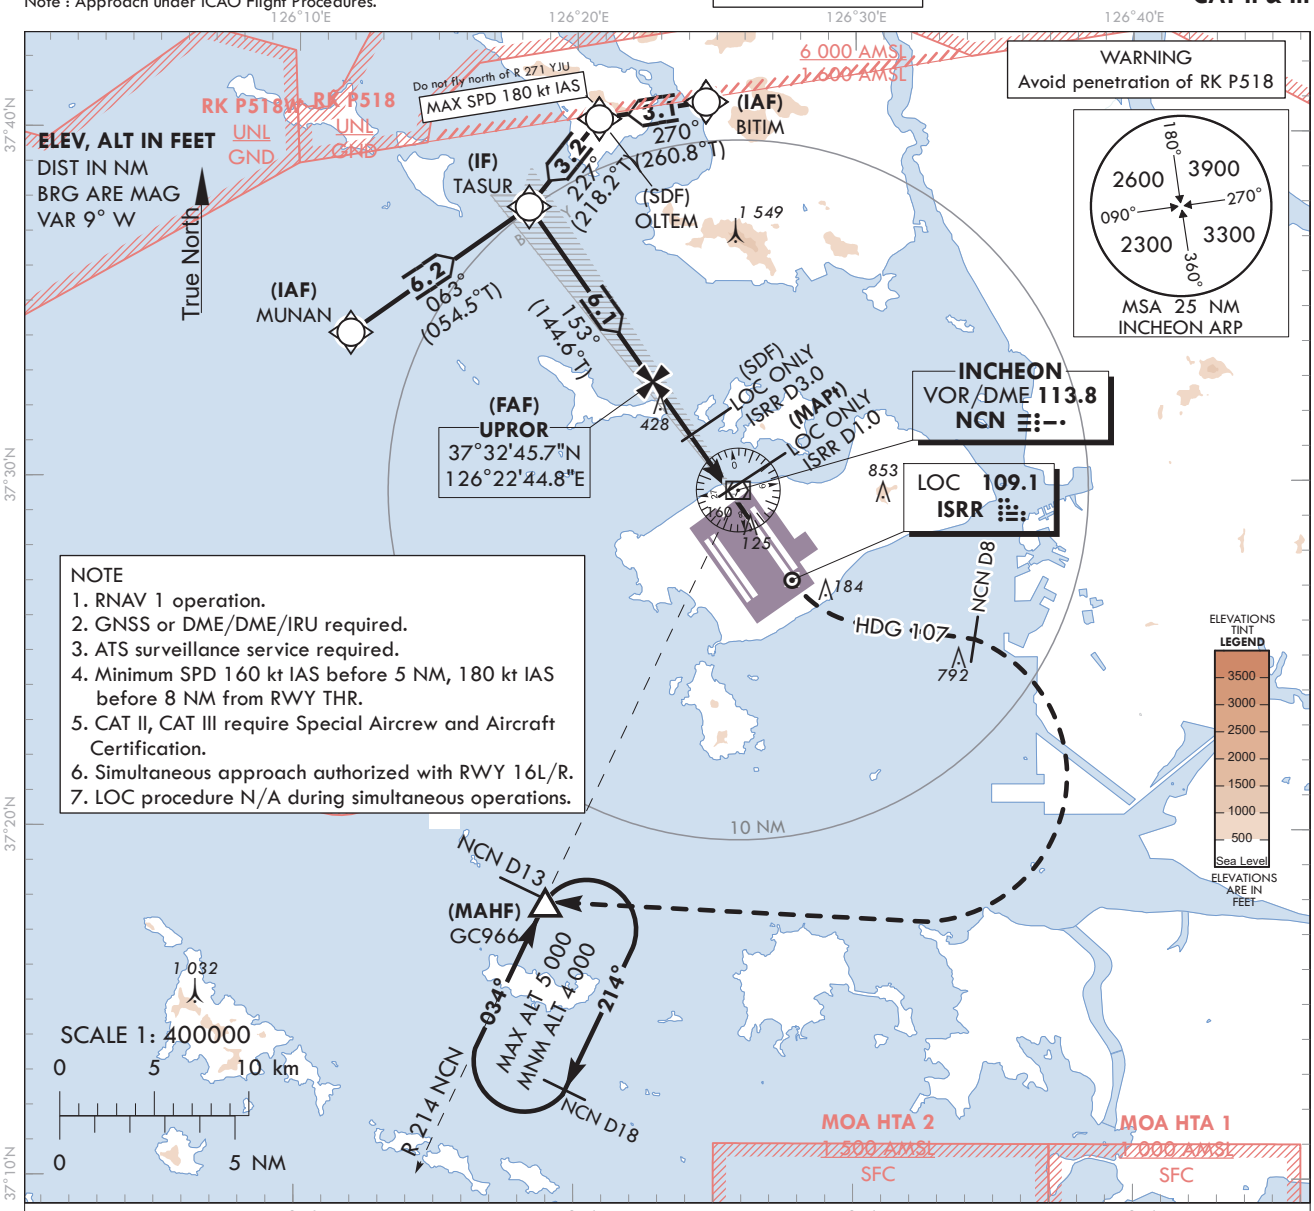

MISSED APPROACH
Fly RWY heading, climb to 4 000 ft. At 720 ft, turn left heading 107. At NCN 8 DME, turn right direct to GC966. Hold as pulished.
Do not turn before passing MAPt.

RECOMMENDED PROFILE (LOC ONLY)	DME ISRR	4	3	2
Final Approach Gradient 5.43%, 330 ft/NM(FAF-SDF) 5.26%, 319 ft/NM(SDF-THR)	ALT(HGT)	1 341 (1 318)	1 011 (988)	681 (658)

TRANSITION ALT 14 000
TRANSITION LVL FL 140

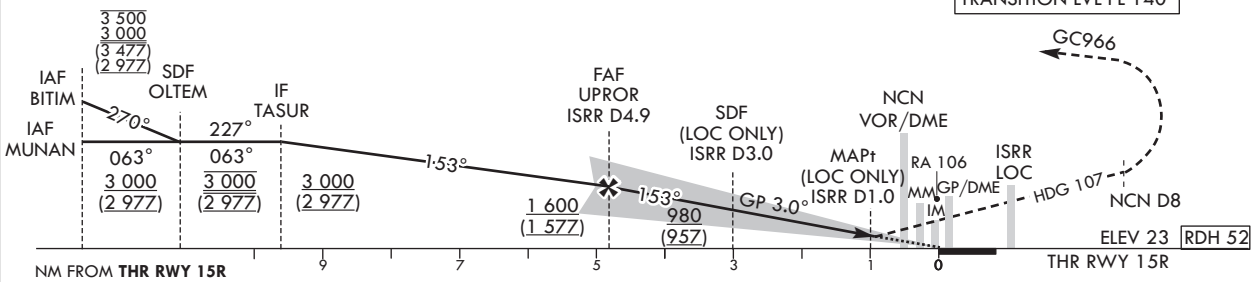

OCA (H)		A	B	C	D
Straight-in Approach	CAT-I	223 (200)			
	LOC	380 (357)			
	CAT II	123 (100)			
	CAT III	-			

	Knots	60	90	120	150	180
Rate of descent	V/V fpm	318	478	637	796	955

* Timing Not authorized for defining MAPt.
* Circling Not authorized.

Change : Establishment of rate of descent.

SEOUL/Incheon Intl(RKSI)
ILS Y or LOC Y RWY 15R
CAT II & III

AERONAUTICAL DATA TABULATION

ILS Y/LOC Y Approach to RWY 15R from MUNAN to TASUR(IF)	
Fix / Point	Coordinates
MUNAN(IAF)	37°34'09.3"N 126°11'53.0"E
TASUR(IF)	37°37'46.4"N 126°18'16.2"E

ILS Y/LOC Y Approach to RWY 15R from BITIM to TASUR(IF)	
Fix / Point	Coordinates
BITIM(IAF)	37°40'48.0"N 126°24'36.1"E
OLTEM(SDF)	37°40'18.2"N 126°20'46.3"E
TASUR(IF)	37°37'46.4"N 126°18'16.2"E

ILS Y/LOC Y Approach to RWY 15R from TASUR(IF) to MAHF		
Fix / Point		Coordinates
UPROR(FAF)	BRG 153.49°/4.89 NM ISRR	37°32'45.7"N 126°22'44.8"E
D3.0 ISRR (SDF LOC ONLY)	BRG 153.49°/3.00 NM ISRR	37°31'13.4"N 126°24'07.1"E
D1.0 ISRR (MAPt LOC ONLY)	BRG 153.49°/1.00 NM ISRR	37°29'35.4"N 126°25'34.4"E
NCN VOR/DME		37°29'41.7"N 126°25'49.2"E
THR RWY 15R		37°28'54.44"N 126°26'10.82"E
ISRR DME		37°28'48.7"N 126°26'21.9"E
Climb to 720 ft	HDG 153	-
D8 NCN	HDG 107	-
GC966	BRG 213.75°/13.00 NM NCN	37°17'53.0"N 126°18'58.0"E

INSTRUMENT APPROACH CHART - ICAO

Note : Approach under ICAO Flight Procedures.

AERODROME ELEV 23 ft
HEIGHTS RELATED TO
THR RWY 15R - ELEV **23** ft

SEOUL	APP	119.75
		121.35
INCHEON	TWR	118.2
		118.8

SEOUL/Incheon Intl(RKSI)

RNP RWY 15R

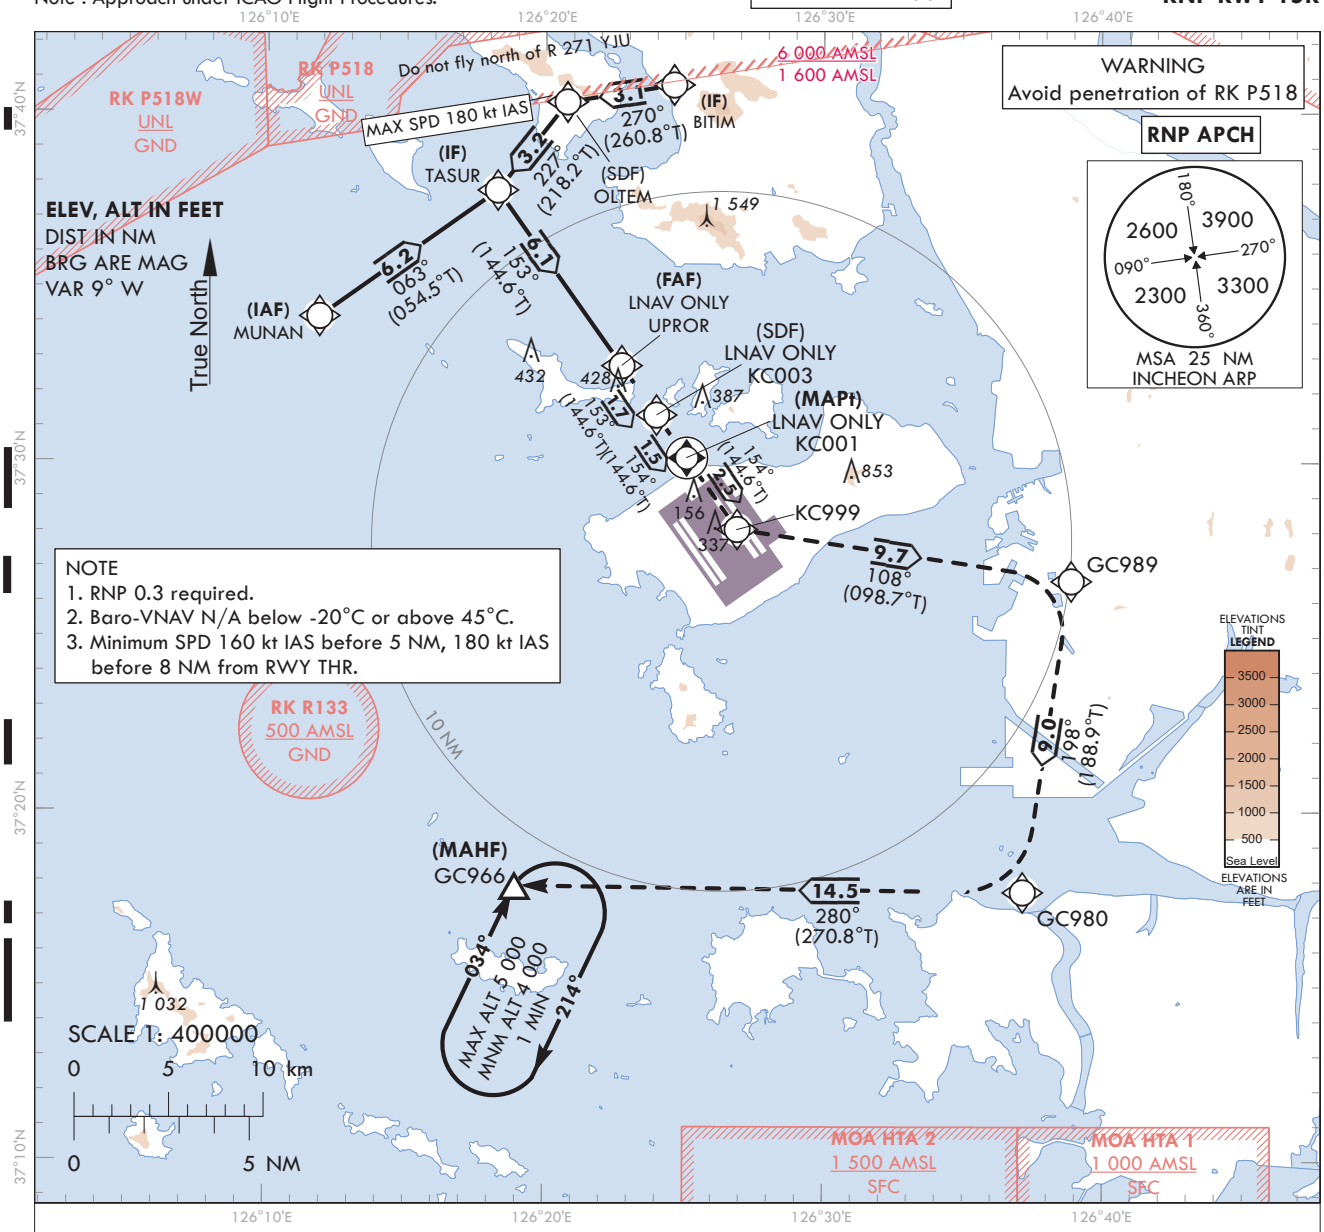

NOTE
1. RNP 0.3 required.
2. Baro-VNAV N/A below -20°C or above 45°C.
3. Minimum SPD 160 kt IAS before 5 NM, 180 kt IAS before 8 NM from RWY THR.

TRANSITION ALT 14 000
TRANSITION LVL FL 140

MISSED APPROACH
Climb to 4 000 ft. Track to KC999, GC989, GC980 and GC966. Hold as published.

NOTE
1. Missed approach turn limited to 210 kt IAS maximum at KC999 and GC989.

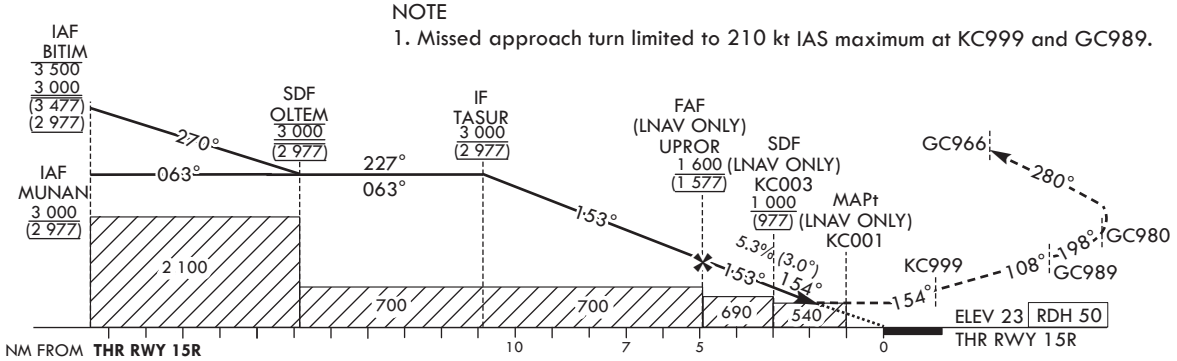

OCA (H)		A	B	C	D		Knots	60	90	120	150	180
Straight-in Approach	LNAV/VNAV	460 (437)				Rate of descent	V/V fpm	324	485	647	809	971
	LNAV	540 (517)				* Timing Not authorized for defining MAPt. * Circling Not authorized.						

Change : Information of course/track for OLTEM, KC001, KC999, KC989, GC980, GC966.

SEOUL/Incheon Intl(RKSI)
RNP RWY 15R

AERONAUTICAL DATA TABULATION

Instrument Approach Procedure Coding Tables

RNP RWY 15R - via MUNAN(IAF) to GC966(MAHF)

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	MUNAN	-	-	-	-	+3 000	-	37°34'09.3"N 126°11'53.0"E	-	RNP APCH	IAF
002	TF	TASUR	-	063 (054.5)	6.2	-	+3 000	-	37°37'46.4"N 126°18'16.2"E	-	RNP APCH	IF
003	TF	UPROR	-	153 (144.6)	6.1	-	+1 600	-	37°32'45.7"N 126°22'44.8"E	-	RNP APCH	FAF
004	TF	KC003	-	153 (144.6)	1.7	-	+1 000	-	37°31'21.4"N 126°23'59.9"E	-	RNP APCH	SDF
005	TF	KC001	Y	154 (144.6)	1.5	-	+540	-	37°30'07.93"N 126°25'05.40"E	-3.05/50	RNP APCH	MAPt
006	TF	KC999	-	154 (144.6)	2.5	-	-	-210	37°28'05.4"N 126°26'54.4"E	-	RNP APCH	-
007	TF	GC989	-	108 (098.7)	9.7	-	-	-210	37°26'36.8"N 126°38'53.7"E	-	RNP APCH	-
008	TF	GC980	-	198 (188.9)	9.0	-	-	-	37°17'42.5"N 126°37'09.6"E	-	RNP APCH	-
009	TF	GC966	-	280 (270.8)	14.5	-	+4 000	-	37°17'53.0"N 126°18'58.0"E	-	RNP APCH	
010	HM	GC966	Y	034 (024.8)	-	R	-5 000 +4 000	-	37°17'53.0"N 126°18'58.0"E	-	RNP APCH	1 min (Outbound timing)

RNP RWY 15R - via BITIM(IAF) to GC966(MAHF)

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	BITIM	-	-	-	-	-3 500 +3 000	-	37°40'48.0"N 126°24'36.1"E	-	RNP APCH	IAF
002	TF	OLTEM	-	270 (260.8)	3.1	-	@3 000	-180	37°40'18.2"N 126°20'46.3"E	-	RNP APCH	SDF
003	TF	TASUR	-	227 (218.2)	3.2	-	+3 000	-	37°37'46.4"N 126°18'16.2"E	-	RNP APCH	IF
004	TF	UPROR		153 (144.6)	6.1	-	+1 600	-	37°32'45.7"N 126°22'44.8"E	-	RNP APCH	FAF
005	TF	KC003	-	153 (144.6)	1.7	-	+1 000	-	37°31'21.4"N 126°23'59.9"E	-	RNP APCH	SDF
006	TF	KC001	Y	154 (144.6)	1.5	-	+540	-	37°30'07.93"N 126°25'05.40"E	-3.05/50	RNP APCH	MAPt
007	TF	KC999	-	154 (144.6)	2.5	-	-	-210	37°28'05.4"N 126°26'54.4"E	-	RNP APCH	-
008	TF	GC989	-	108 (098.7)	9.7	-	-	-210	37°26'36.8"N 126°38'53.7"E	-	RNP APCH	-
009	TF	GC980	-	198 (188.9)	9.0	-	-	-	37°17'42.5"N 126°37'09.6"E	-	RNP APCH	-
010	TF	GC966	-	280 (270.8)	14.5	-	+4 000	-	37°17'53.0"N 126°18'58.0"E	-	RNP APCH	
011	HM	GC966	Y	034 (024.8)	-	R	-5 000 +4 000	-	37°17'53.0"N 126°18'58.0"E	-	RNP APCH	1 min (Outbound timing)

Change : Information of course/track for OLTEM, KC001, KC999, KC989, GC980, GC966.

INSTRUMENT APPROACH CHART - ICAO

Note : Approach under ICAO Flight Procedures.

AERODROME ELEV 23 ft
HEIGHTS ELEV TO
THR RWY 16L - ELEV 23 ft

SEOUL	APP	119.75 121.35
INCHEON	TWR	118.2 118.8

SEOUL/Incheon Intl(RKSI)

ILS or LOC RWY 16L
CAT II & III

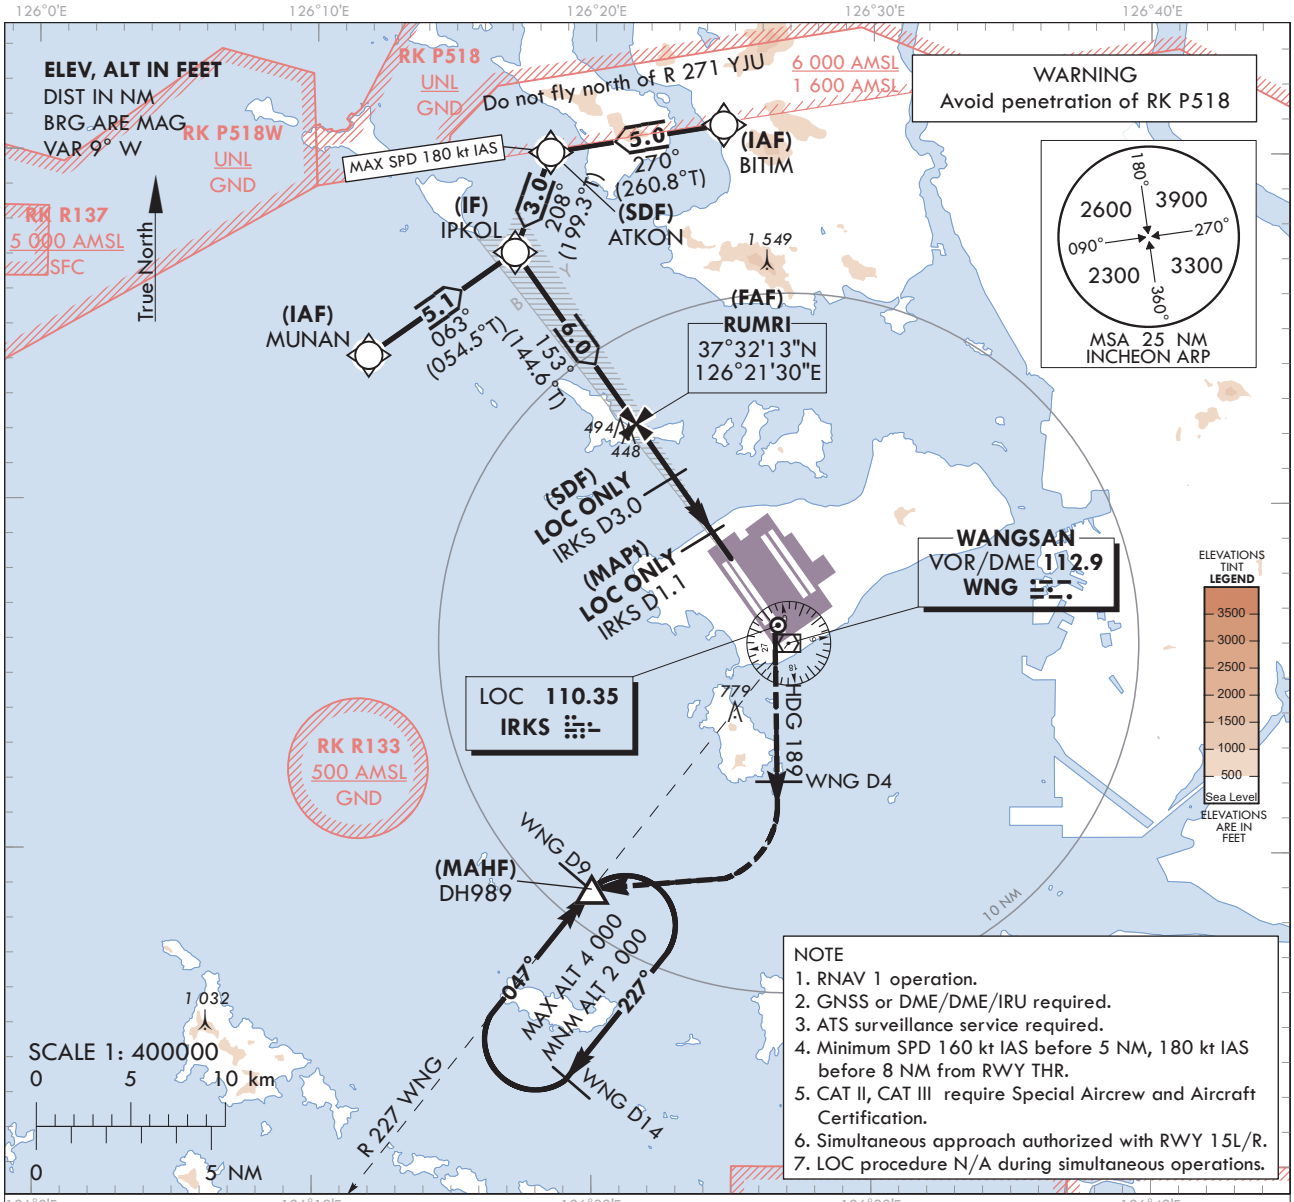

NOTE
1. RNAV 1 operation.
2. GNSS or DME/DME/IRU required.
3. ATS surveillance service required.
4. Minimum SPD 160 kt IAS before 5 NM, 180 kt IAS before 8 NM from RWY THR.
5. CAT II, CAT III require Special Aircrew and Aircraft Certification.
6. Simultaneous approach authorized with RWY 15L/R.
7. LOC procedure N/A during simultaneous operations.

MISSED APPROACH
Fly RWY heading, climb to 2 000 ft. At 500 ft, turn right heading 189. At WNG 4 DME, turn right direct to DH989. Hold as published.
Do not turn before passing MAPt.

RECOMMENDED PROFILE (LOC ONLY)	DME ISRR	4	3	2
Final Approach Gradient 5.35%, 325 ft/NM(FAF-SDF) 5.31% 323 ft/NM(SDF-THR)	ALT(HGT)	1 322 (1 299)	997 (974)	672 (649)

TRANSITION ALT 14 000
TRANSITION LVL FL 140

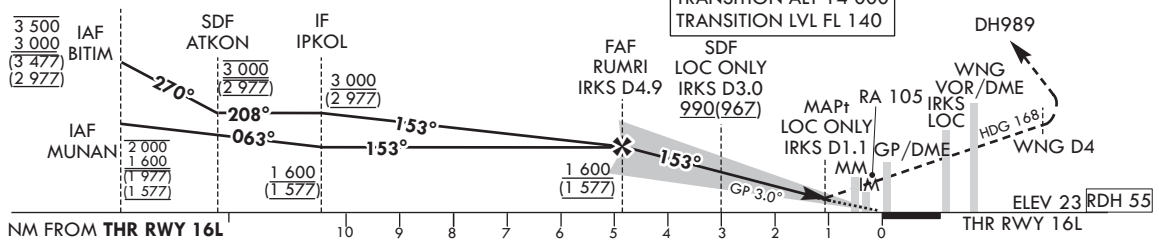

NOTE
1. Missed approach turn limited to 210 kt IAS maximum.
2. Missed approach minimum climb gradient of 2.5% to 2 000 ft (OCH 437 or 387), 4.0% to 2 000 ft (OCH 200 or 100).

OCA (H)		A	B	C	D
Straight-in Approach	CAT-I (CG 2.5%)	460 (437)			
	CAT-I (CG 4.0%)	223 (200)			
	LOC	410 (387)			
	CAT II	123 (100)			
	CAT III	-			

Knots	60	90	120	150	180
Rate of descent V/V fpm	318	478	637	796	955

* Timing Not authorized for defining MAPt.
* Circling Not authorized.

Change : Amended phrase(CAT IIII → CAT III).

AERONAUTICAL DATA TABULATION

ILS/LOC Approach to RWY 16L from MUNAN to IPKOL(IF)	
Fix / Point	Coordinates
MUNAN(IAF)	37°34'09.3"N 126°11'53.0"E
IPKOL(IF)	37°37'07.4"N 126°17'07.3"E

ILS/LOC Approach to RWY 16L from BITIM to IPKOL(IF)	
Fix / Point	Coordinates
BITIM(IAF)	37°40'48.0"N 126°24'36.1"E
ATKON(SDF)	37°39'59.6"N 126°18'23.2"E
IPKOL(IF)	37°37'07.4"N 126°17'07.3"E

ILS/LOC Approach to RWY 16L from IPKOL(IF) to MAHF		
Fix / Point		Coordinates
RUMRI(FAF)	BRG 153.48°/4.88 NM IRKS	37°32'12.9"N 126°21'30.4"E
D3.0 IRKS(SDF) (LOC ONLY)	BRG 153.48°/3.00 NM IRKS	37°30'40.6"N 126°22'52.7"E
D1.1 IRKS(MAPt) (LOC ONLY)	BRG 153.48°/1.10 NM IRKS	37°29'07.4"N 126°24'15.7"E
THR RWY 16L		37°28'22.11"N 126°24'56.05"E
IRKS DME		37°28'11.4"N 126°24'59.7"E
WNG VOR/DME		37°25'58.6"N 126°27'00.0"E
Climb to 500 ft	HDG 153	-
D4 WNG	HDG 189	-
DH989	BRG 227.31°/9.00 NM WNG	37°18'55.0"N 126°19'59.0"E

INSTRUMENT APPROACH CHART - ICAO

Note : Approach under ICAO Flight Procedures.

AERODROME ELEV 23 ft
HEIGHTS RELATED TO
THR RWY 16L - ELEV **23** ft

SEOUL	APP	119.75
		121.35
INCHEON TWR		118.2
		118.8

SEOUL/Incheon Intl(RKSI)

RNP RWY 16L

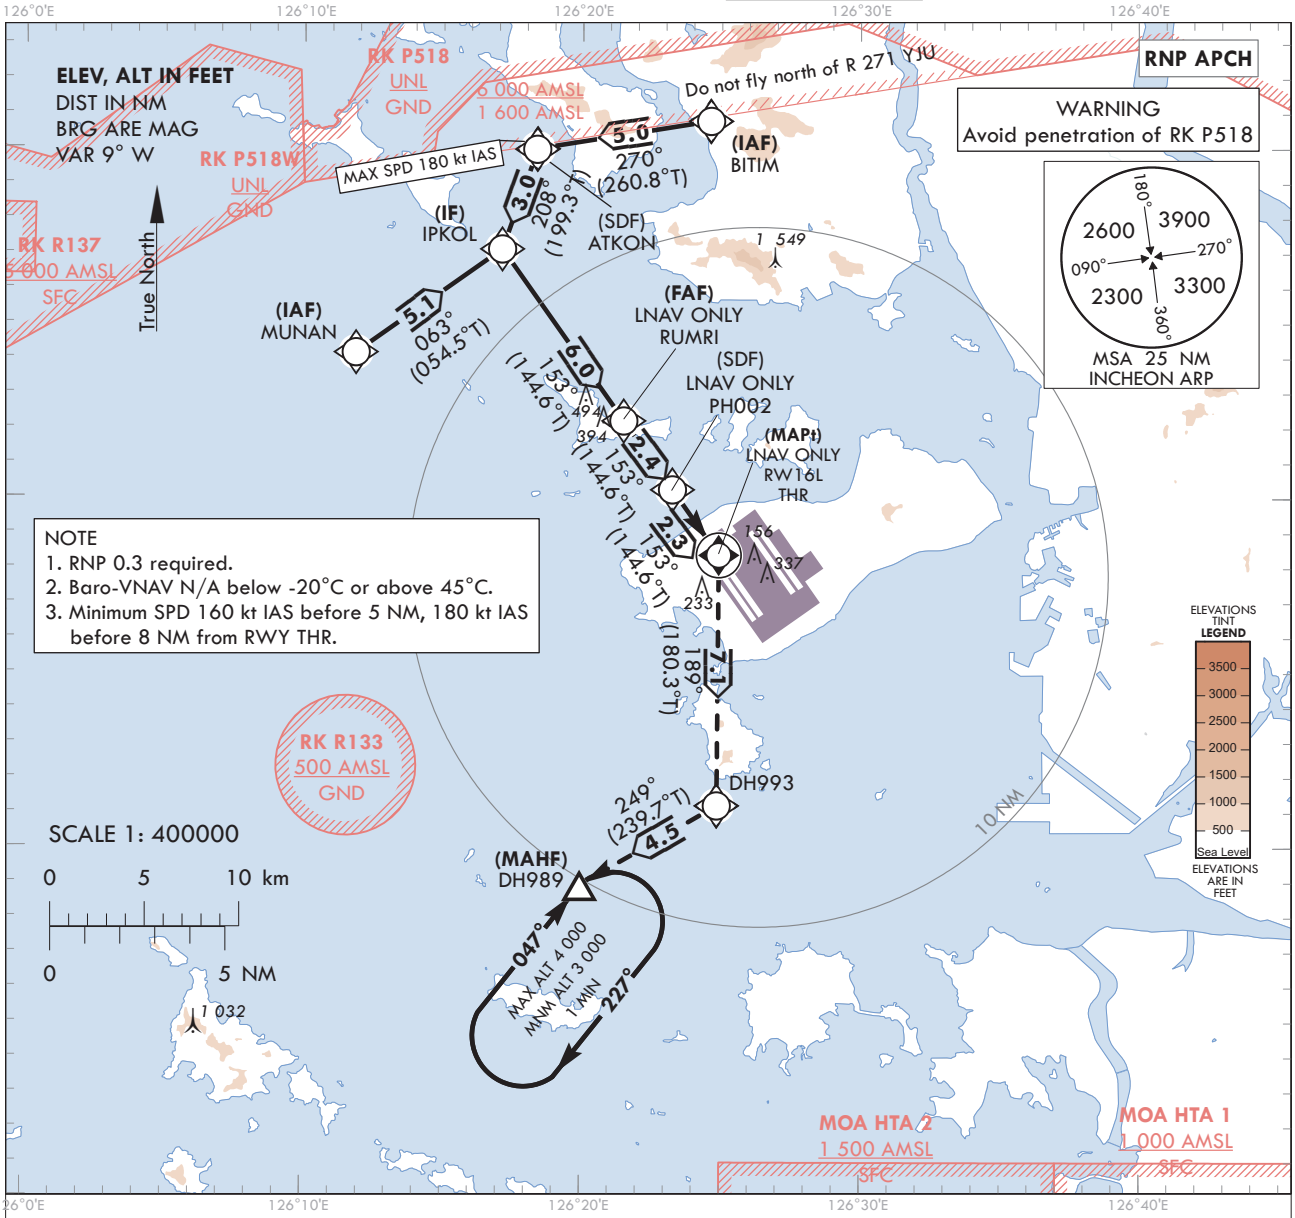

TRANSITION ALT 14 000
TRANSITION LVL FL 140

MISSED APPROACH
Climb to 3 000 ft. Track to DH993 and DH989. Hold as published.

NOTE
1. Missed approach turn limited to 240 kt IAS maximum.
2. Missed approach climb gradient of 4.0% for ATC purpose.

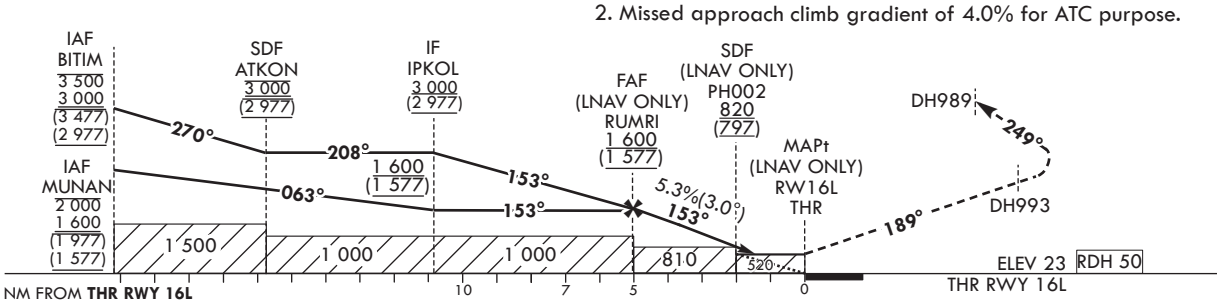

OCA (H)		A	B	C	D
Straight-in Approach	LNAV/VNAV	430 (407)			
	LNAV	520 (497)			

	Knots	60	90	120	150	180
Rate of descent	V/V fpm	324	486	648	810	972

* Timing Not authorized for defining MAPt.
* Circling Not authorized.

Change : Information of course/track for ATKON, DH989.

Instrument Approach Procedure Coding Tables

RNP RWY 16L - via MUNAN(IAF) to DH989(MAHF)

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	MUNAN	-	-	-	-	-2 000 +1 600	-	37°34'09.3"N 126°11'53.0"E	-	RNP APCH	IAF
002	TF	IPKOL	-	063 (054.5)	5.1	-	+1 600	-	37°37'07.4"N 126°17'07.3"E	-	RNP APCH	IF
003	TF	RUMRI	-	153 (144.6)	6.0	-	+1 600	-	37°32'12.9"N 126°21'30.4"E	-	RNP APCH	FAF
004	TF	PH002	-	153 (144.6)	2.4	-	+820	-	37°30'14.8"N 126°23'15.7"E	-	RNP APCH	SDF
005	TF	RW16L	Y	153 (144.6)	2.3	-	+520	-	37°28'22.11"N 126°24'56.06"E	-3.05/50	RNP APCH	MAPt
006	TF	DH993	-	189 (180.3)	7.1	-	-	-240	37°21'12.6"N 126°24'53.1"E	-	RNP APCH	-
007	TF	DH989	Y	249 (239.7)	4.5	-	+3 000	-240	37°18'55.0"N 126°19'59.0"E	-	RNP APCH	-
008	HM	DH989	Y	047 (038.4)	-	R	-4 000 +3 000	-	37°18'55.0"N 126°19'59.0"E	-	RNP APCH	1 min (Outbound timing)

RNP RWY 16L - via BITIM(IAF) to DH989(MAHF)

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	BITIM	-	-	-	-	-3 500 +3 000	-	37°40'48.0"N 126°24'36.1"E	-	RNP APCH	IAF
002	TF	ATKON	-	270 (260.8)	5.0	-	@3 000	-180	37°39'59.6"N 126°18'23.2"E	-	RNP APCH	SDF
003	TF	IPKOL	-	208 (199.3)	3.0	-	+3 000	-	37°37'07.4"N 126°17'07.3"E	-	RNP APCH	IF
004	TF	RUMRI	-	153 (144.6)	6.0	-	+1 600	-	37°32'12.9"N 126°21'30.4"E	-	RNP APCH	FAF
005	TF	PH002	-	153 (144.6)	2.4	-	+820	-	37°30'14.8"N 126°23'15.7"E	-	RNP APCH	SDF
006	TF	RW16L	Y	153 (144.6)	2.3	-	+520	-	37°28'22.11"N 126°24'56.06"E	-3.05/50	RNP APCH	MAPt
007	TF	DH993	-	189 (180.3)	7.1	-	-	-240	37°21'12.6"N 126°24'53.1"E	-	RNP APCH	-
008	TF	DH989	Y	249 (239.7)	4.5	-	+3 000	-240	37°18'55.0"N 126°19'59.0"E	-	RNP APCH	-
009	HM	DH989	Y	047 (038.4)	-	R	-4 000 +3 000	-	37°18'55.0"N 126°19'59.0"E	-	RNP APCH	1 min (Outbound timing)

INSTRUMENT APPROACH CHART-ICAO

Note : Approach under ICAO Flight Procedures.

AERODROME ELEV 23 ft
HEIGHTS RELATED TO
THR RWY 16R - ELEV **23** ft

SEOUL	APP	119.75
		121.35
INCHEON	TWR	118.2
		118.8

SEOUL/Incheon Intl(RKSI)

ILS or LOC RWY 16R
CAT II & III

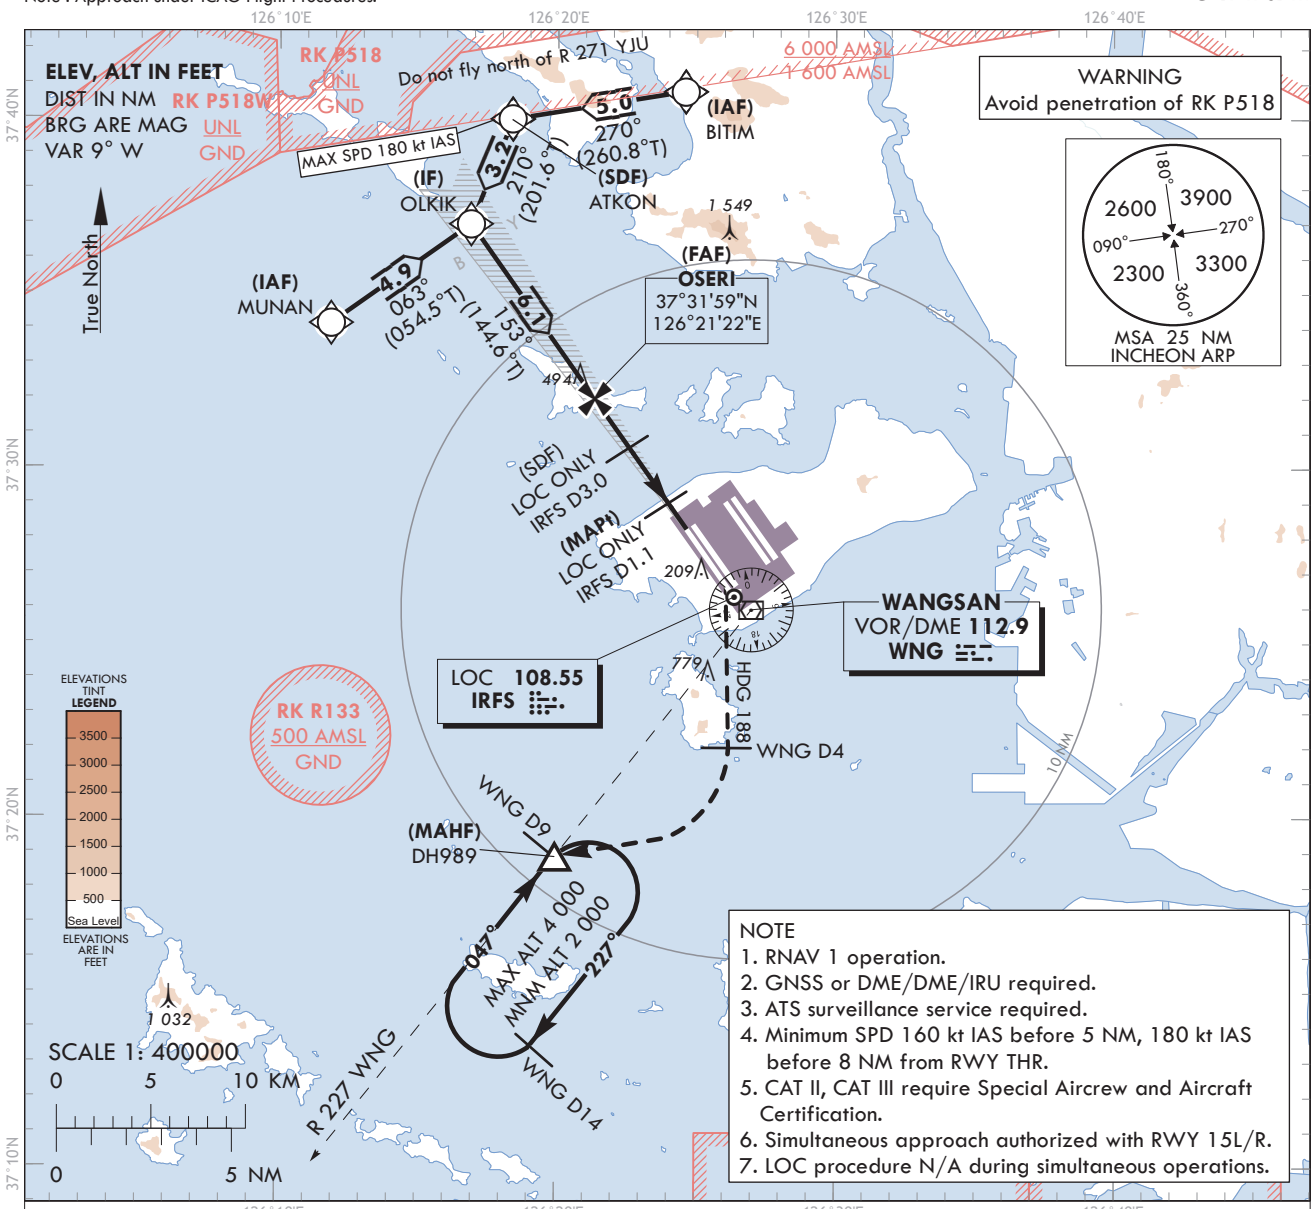

NOTE
1. RNAV 1 operation.
2. GNSS or DME/DME/IRU required.
3. ATS surveillance service required.
4. Minimum SPD 160 kt IAS before 5 NM, 180 kt IAS before 8 NM from RWY THR.
5. CAT II, CAT III require Special Aircrew and Aircraft Certification.
6. Simultaneous approach authorized with RWY 15L/R.
7. LOC procedure N/A during simultaneous operations.

MISSED APPROACH
Fly RWY heading, climb to 2 000 ft. At 500 ft, turn right heading 188. At WNG 4 DME, turn right direct to DH989. Hold as published. Do not turn before passing MAPt.

RECOMMENDED PROFILE (LOC ONLY)	DME IRFS	4	3	2
Final Approach Gradient 5.32%, 323 ft/NM(FAF-SDF) 5.31%, 323 ft/NM(SDF-THR)	ALT(HGT)	1 315 (1 292)	992 (969)	669 (646)

NOTE
1. Missed approach turn limited to 210 kt IAS maximum.
2. Missed approach minimum climb gradient of 2.5% to 2 000 ft (OCH 437 or 387), 4.0% to 2 000 ft (OCH 200 or 100).

TRANSITION ALT 14 000
TRANSITION LVL FL 140

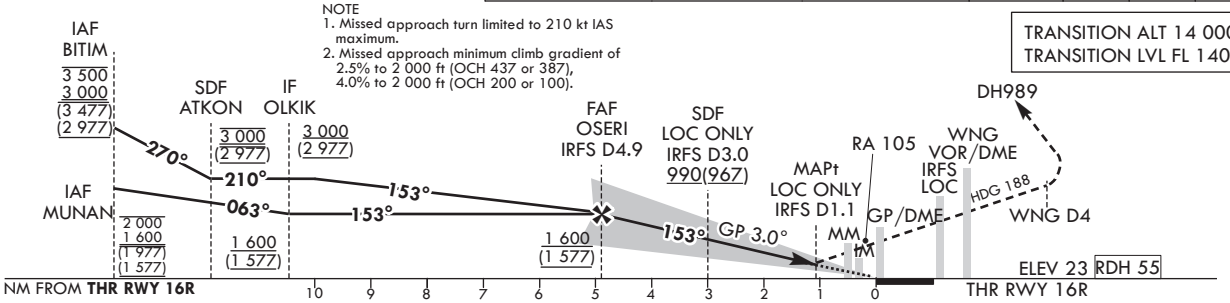

OCA (H)		A	B	C	D
Straight-in Approach	CAT-I (CG 2.5%)	460 (437)			
	CAT-I (CG 4.0%)	223 (200)			
	LOC	410 (387)			
	CAT II	123 (100)			
	CAT III	-			

	Knots	60	90	120	150	180
Rate of descent	V/V fpm	318	478	637	796	955

* Timing Not authorized for defining MAPt.
* Circling Not authorized.

Change : Establishment of rate of descent.

SEOUL/Incheon Intl(RKSI)
ILS or LOC RWY 16R
CAT II & III

AERONAUTICAL DATA TABULATION

ILS/LOC Approach to RWY 16R from MUNAN to OLKIK(IF)	
Fix / Point	Coordinates
MUNAN(IAF)	37°34'09.3"N 126°11'53.0"E
OLKIK(IF)	37°36'59.6"N 126°16'53.5"E

ILS/LOC Approach to RWY 16R from BITIM to OLKIK(IF)	
Fix / Point	Coordinates
BITIM(IAF)	37°40'48.0"N 126°24'36.1"E
ATKON(SDF)	37°39'59.6"N 126°18'23.2"E
OLKIK(IF)	37°36'59.6"N 126°16'53.5"E

ILS/LOC Approach to RWY 16R from OLKIK(IF) to MAHF		
Fix / Point		Coordinates
OSERI(FAF)	BRG 153.48°/4.89 NM IRFS	37°31'59.0"N 126°21'22.1"E
D3.0 IRFS(SDF) (LOC ONLY)	BRG 153.48°/3.00 NM IRFS	37°30'26.2"N 126°22'44.8"E
D1.1 IRFS(MAPt) (LOC ONLY)	BRG 153.48°/1.10 NM IRFS	37°28'53.2"N 126°24'07.7"E
THR RWY 16R		37°28'07.71"N 126°24'48.18"E
IRFS DME		37°27'57.0"N 126°24'51.7"E
WNG VOR/DME		37°25'58.6"N 126°27'00.0"E
Climb to 500 ft	HDG 153	-
D4 WNG	HDG 188	-
DH989	BRG 227.31°/9.00 NM WNG	37°18'55.0"N 126°19'59.0"E

INSTRUMENT APPROACH CHART - ICAO

Note : Approach under ICAO Flight Procedures.

AERODROME ELEV 23 ft
HEIGHTS RELATED TO
THR RWY 16R - ELEV **23** ft

SEOUL	APP	119.75 121.35
INCHEON	TWR	118.2 118.8

SEOUL/Incheon Intl(RKSI)

RNP RWY 16R

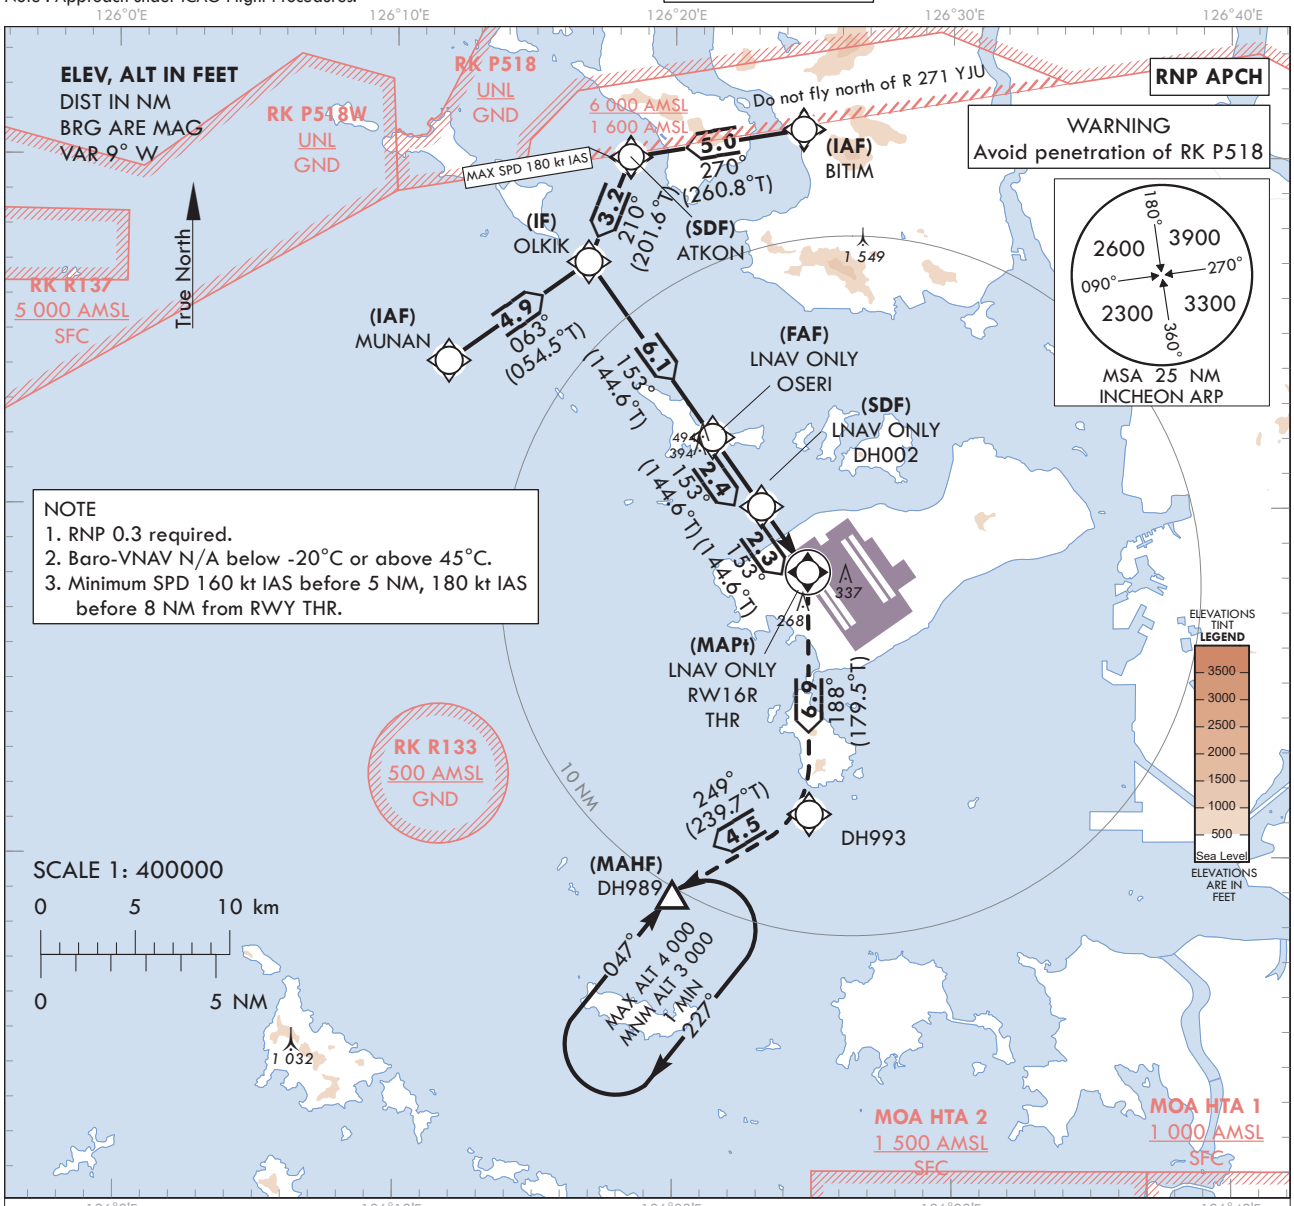

TRANSITION ALT 14 000
TRANSITION LVL FL 140

MISSED APPROACH
Climb to 3 000 ft. Track to DH993 and DH989. Hold as published.

NOTE
1. Missed approach turn limited to 240 kt IAS maximum.
2. Missed approach climb gradient of 4.0% for ATC purpose.

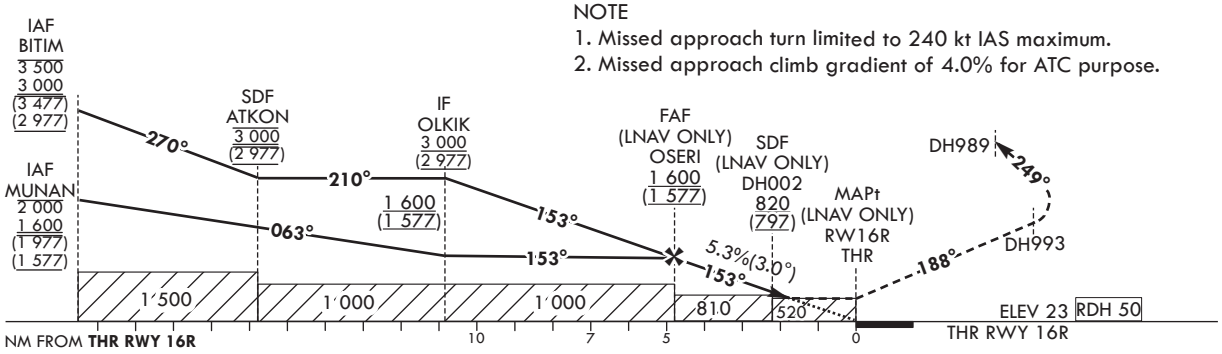

OCA (H)		A	B	C	D
Straight-in Approach	LNAV/VNAV	430 (407)			
	LNAV	520 (497)			

	Knots	60	90	120	150	180
Rate of descent	V/V fpm	323	485	647	809	970

* Timing Not authorized for defining MAPt.
* Circling Not authorized.

Change : Information of course/track for ATKON, DH989.

Instrument Approach Procedure Coding Tables

RNP RWY 16R - via MUNAN(IAF) to DH989(MAHF)

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	MUNAN	-	-	-	-	-2 000 +1 600	-	37°34'09.3"N 126°11'53.0"E	-	RNP APCH	IAF
002	TF	OLKIK	-	063 (054.5)	4.9	-	+1 600	-	37°36'59.6"N 126°16'53.5"E	-	RNP APCH	IF
003	TF	OSERI	-	153 (144.6)	6.1	-	+1 600	-	37°31'59.0"N 126°21'22.1"E	-	RNP APCH	FAF
004	TF	DH002	-	153 (144.6)	2.4	-	+820	-	37°30'00.4"N 126°23'07.8"E	-	RNP APCH	SDF
005	TF	RW16R	Y	153 (144.6)	2.3	-	+520	-	37°28'07.71"N 126°24'48.18"E	-3.05/50	RNP APCH	MAPt
006	TF	DH993	-	188 (179.5)	6.9	-	-	-240	37°21'12.6"N 126°24'53.1"E	-	RNP APCH	-
007	TF	DH989	Y	249 (239.7)	4.5	-	+3 000	-240	37°18'55.0"N 126°19'59.0"E	-	RNP APCH	-
008	HM	DH989	Y	047 (038.4)	-	R	-4 000 +3 000	-	37°18'55.0"N 126°19'59.0"E	-	RNP APCH	1 min (Outbound timing)

RNP RWY 16R - via BITIM(IAF) to DH989(MAHF)

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	BITIM	-	-	-	-	-3 500 +3 000	-	37°40'48.0"N 126°24'36.1"E	-	RNP APCH	IAF
002	TF	ATKON	-	270 (260.8)	5.0	-	@3 000	-180	37°39'59.6"N 126°18'23.2"E	-	RNP APCH	SDF
003	TF	OLKIK	-	210 (201.6)	3.2	-	+3 000	-	37°36'59.6"N 126°16'53.5"E	-	RNP APCH	IF
004	TF	OSERI	-	153 (144.6)	6.1	-	+1 600	-	37°31'59.0"N 126°21'22.1"E	-	RNP APCH	FAF
005	TF	DH002	-	153 (144.6)	2.4	-	+820	-	37°30'00.4"N 126°23'07.8"E	-	RNP APCH	SDF
006	TF	RW16R	Y	153 (144.6)	2.3	-	+520	-	37°28'07.71"N 126°24'48.18"E	-3.05/50	RNP APCH	MAPt
007	TF	DH993	-	188 (179.5)	6.9	-	-	-240	37°21'12.6"N 126°24'53.1"E	-	RNP APCH	-
008	TF	DH989	Y	249 (239.7)	4.5	-	+3 000	-240	37°18'55.0"N 126°19'59.0"E	-	RNP APCH	-
009	HM	DH989	Y	047 (038.4)	-	R	-4 000 +3 000	-	37°18'55.0"N 126°19'59.0"E	-	RNP APCH	1 min (Outbound timing)

Change : Information of course/track for ATKON, DH989.

INSTRUMENT APPROACH CHART - ICAO

Note : Approach under ICAO Flight Procedures.

AERODROME ELEV 23 ft
HEIGHTS RELATED TO
THR RWY 33L - ELEV **23** ft

SEOUL	APP	119.75
		121.35
INCHEON	TWR	118.2
		118.8

SEOUL/Incheon Intl(RKSI)

ILS or LOC RWY 33L CAT II & III

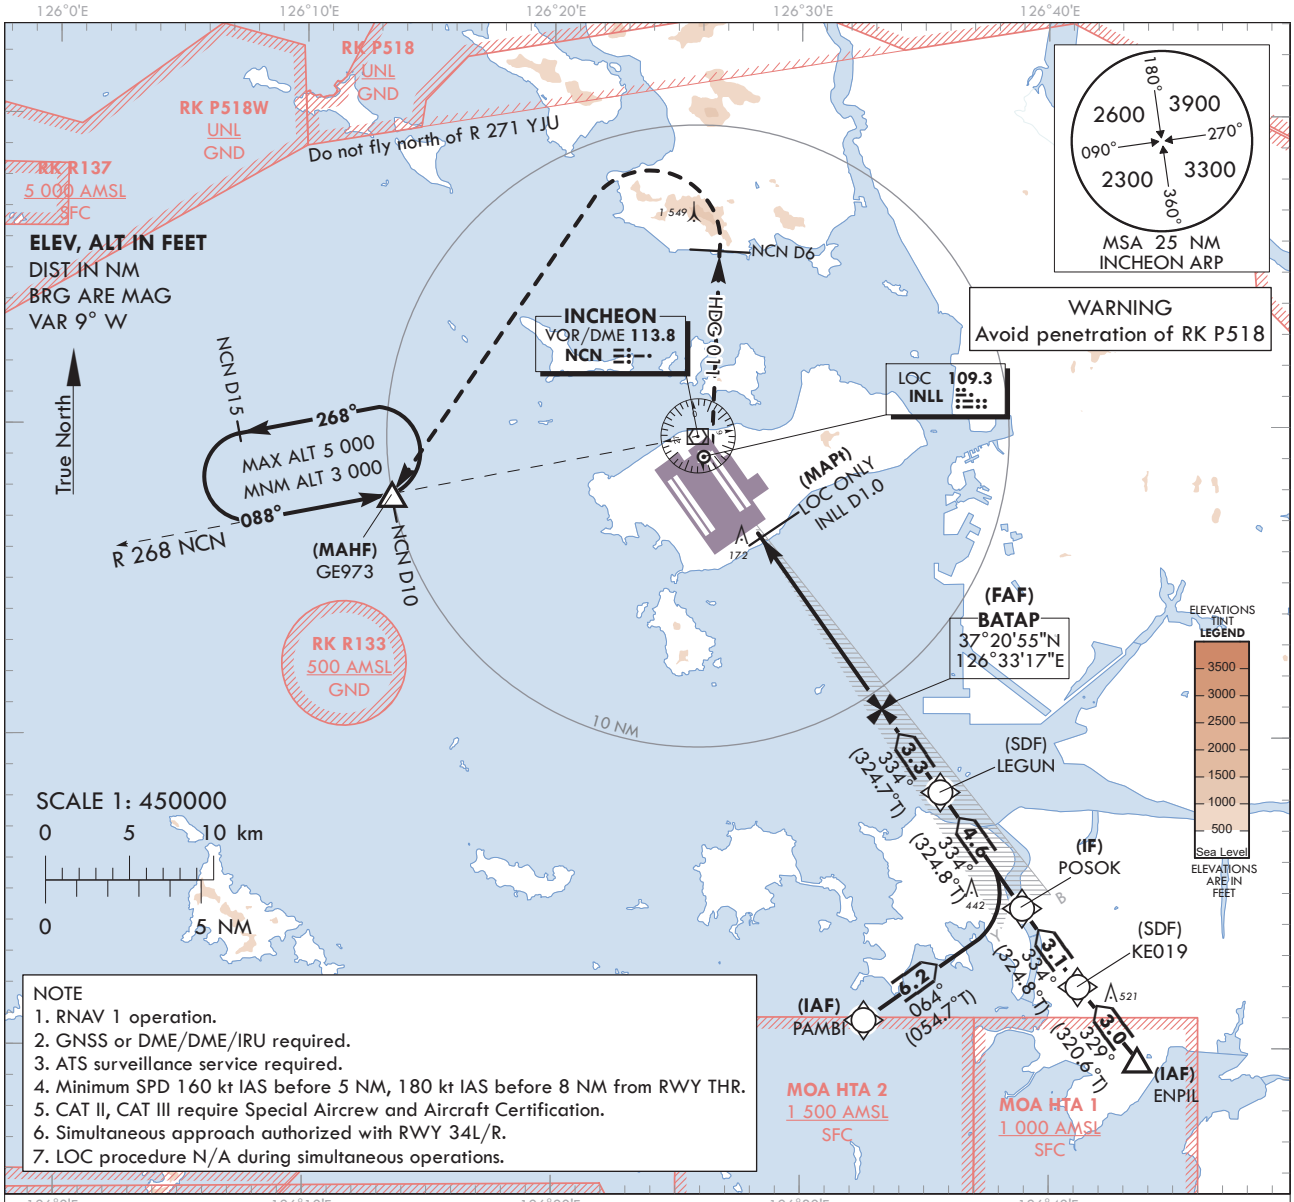

NOTE
1. RNAV 1 operation.
2. GNSS or DME/DME/IRU required.
3. ATS surveillance service required.
4. Minimum SPD 160 kt IAS before 5 NM, 180 kt IAS before 8 NM from RWY THR.
5. CAT II, CAT III require Special Aircrew and Aircraft Certification.
6. Simultaneous approach authorized with RWY 34L/R.
7. LOC procedure N/A during simultaneous operations.

RECOMMENDED PROFILE(LOC ONLY)	DME INLL	7	6	5	4	3	2
Final Approach Gradient 5.36%, 326 ft/NM	ALT(HGT)	2 301 (2 278)	1 975 (1 952)	1 650 (1 627)	1 324 (1 301)	999 (976)	673 (650)

TRANSITION ALT 14 000
TRANSITION LVL FL 140

MISSED APPROACH
Fly RWY heading, climb to 3 000 ft. At 500 ft, turn right heading 011. At NCN 6 DME, turn left direct to GE973.
Hold as published. Do not turn before passing MAPt.

NOTE
1. Missed approach turn limited to 210 kt IAS maximum.
2. Missed approach minimum climb gradient of 2.5% to 3 000 ft (OCH 438 or 417), 4.0% to 2 000 ft (OCH 200 or 100).

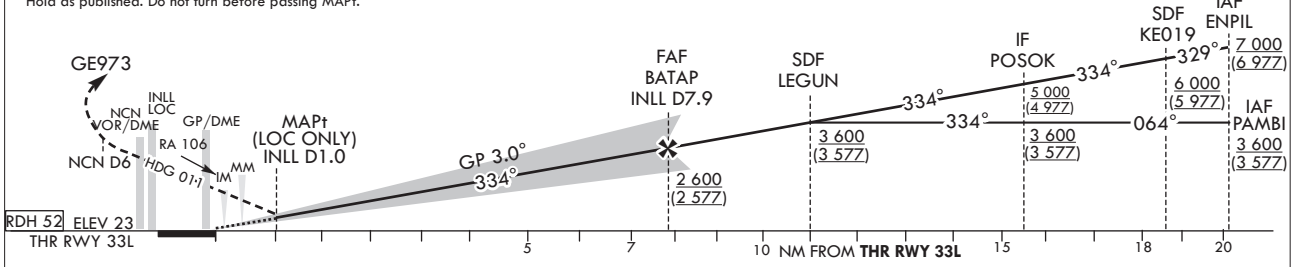

OCA (H)		A	B	C	D
Straight-in Approach	CAT-I (CG 2.5%)	461 (438)			
	CAT-I (CG 4.0%)	223 (200)			
	LOC	440 (417)			
	CAT II	123 (100)			
	CAT III	-			

Rate of descent	Knots	60	90	120	150	180
	V/V fpm	318	478	637	796	955

*Timing Not authorized for defining MAPt.
*Circling Not authorized.

Change : Establishment of rate of descent.

SEOUL/Incheon Intl(RKSI)
ILS or LOC RWY 33L
CAT II & III

AERONAUTICAL DATA TABULATION

ILS/LOC Approach to RWY 33L from PAMBI to POSOK(IF)	
Fix / Point	Coordinates
PAMBI(IAF)	37°10'54.3"N 126°32'34.4"E
POSOK(IF)	37°14'30.3"N 126°38'56.6"E

ILS/LOC Approach to RWY 33L from ENPIL to POSOK(IF)	
Fix / Point	Coordinates
ENPIL(IAF)	37°09'39.0" N 126°43'34.0" E
KE019(SDF)	37°11'58.6"N 126°41'10.5"E
POSOK(IF)	37°14'30.3"N 126°38'56.6"E

ILS/LOC Approach to RWY 33L from POSOK(IF) to MAHF		
Fix / Point		Coordinates
LEGUN(SDF)		37°18'14.5"N 126°35'38.6"E
BATAP(FAF)	BRG 333.60°/7.92 NM INLL	37°20'54.7"N 126°33'16.8"E
D1.0 INLL (MAPt LOC ONLY)	BRG 333.60°/1.00 NM INLL	37°26'34.2"N 126°28'15.6"E
THR RWY 33L		37°27'15.21"N 126°27'39.08"E
INLL DME		37°27'25.4"N 126°27'35.9"E
NCN VOR/DME		37°29'41.7"N 126°25'49.2"E
Climb to 500 ft	HDG 334	-
D6 NCN	HDG 011	-
GE973	BRG 267.93°/10.00 NM NCN	37°27'47.0"N 126°13'29.0"E

INSTRUMENT APPROACH CHART - ICAO

Note : Approach under ICAO Flight Procedures.

AERODROME ELEV 23 ft
HEIGHTS RELATED TO
THR RWY 33L - ELEV **23** ft

SEOUL	APP	119.75
		121.35
INCHEON	TWR	118.2
		118.8

SEOUL/Incheon Intl(RKSI)

RNP RWY 33L

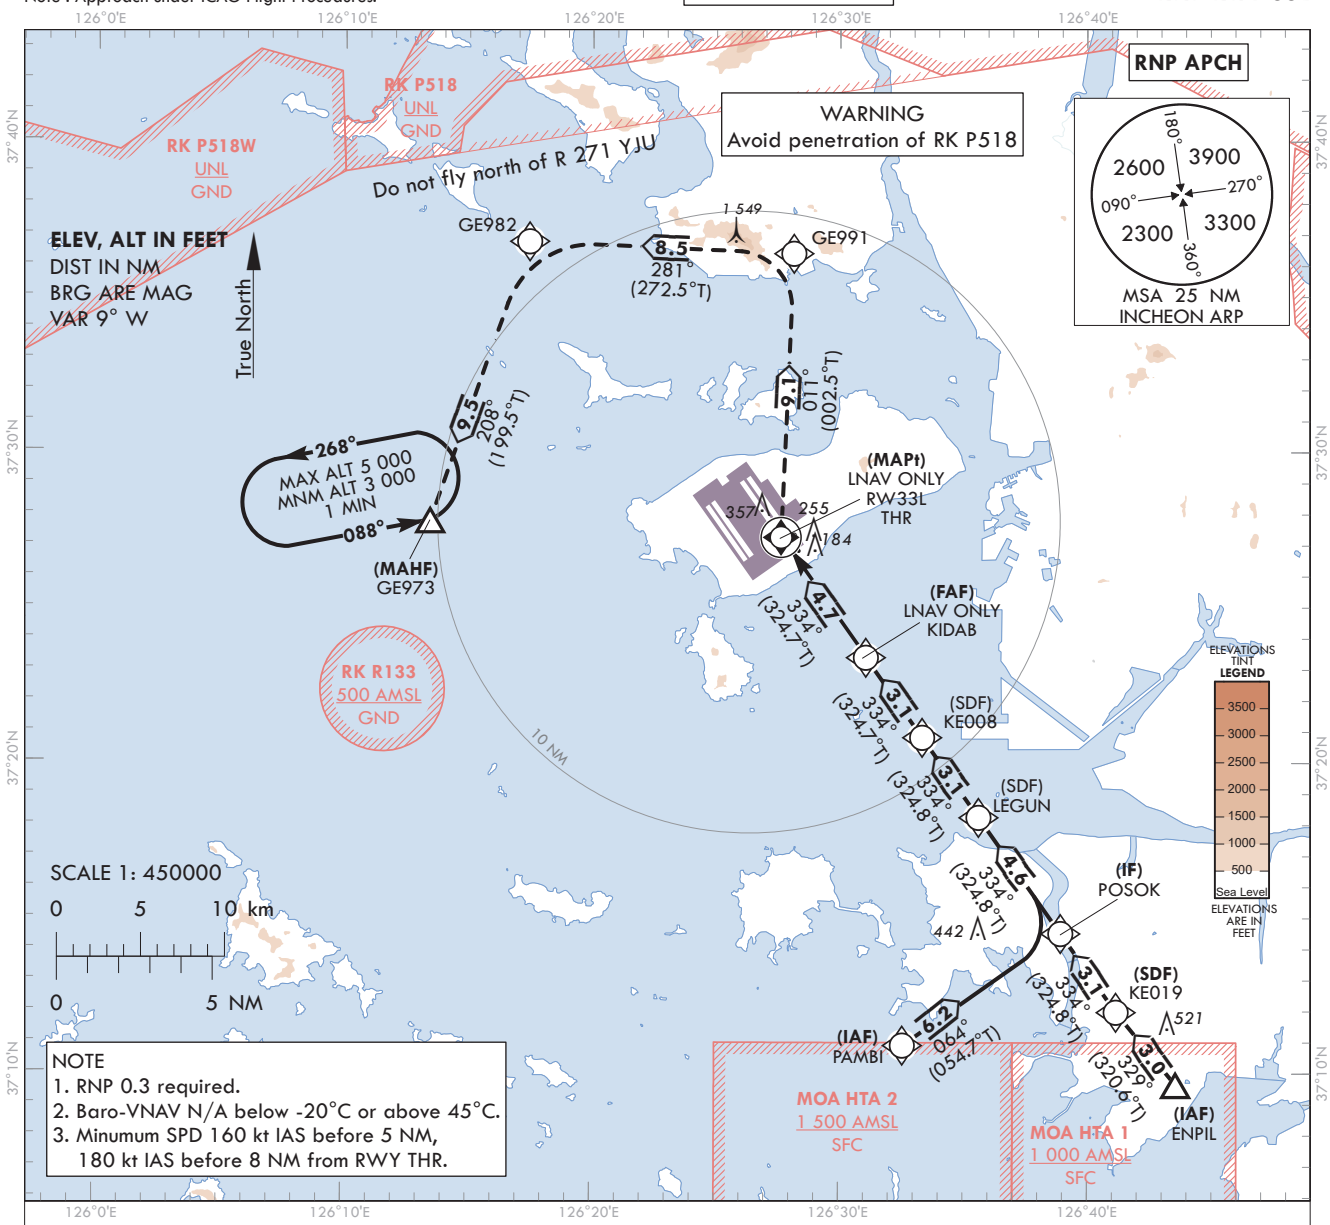

MISSED APPROACH
Climb to 3 000 ft. Track to GE991, GE982 and GE973. Hold as published.

TRANSITION ALT 14 000
TRANSITION LVL FL 140

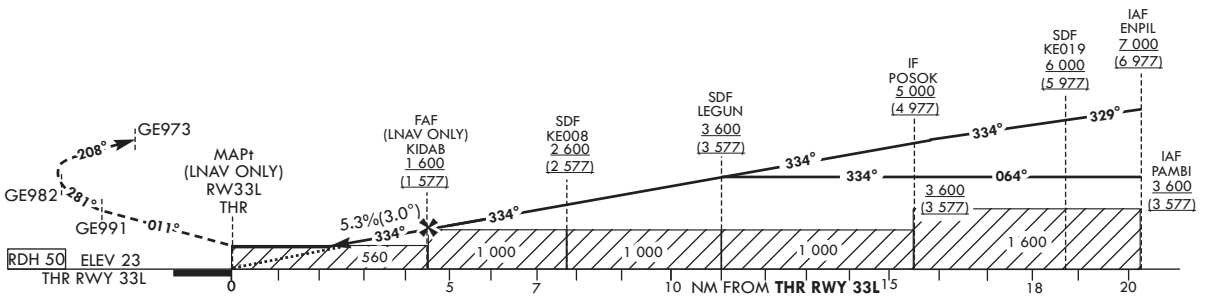

OCA (H)		A	B	C	D
Straight-in Approach	LNAV/VNAV	430 (407)			
	LNAV	560 (537)			

Knots	60	90	120	150	180
Rate of descent V/V fpm	323	484	645	807	968

*Timing Not authorized for defining MAPt.
*Circling Not authorized.

Change : Information of course/track for POSOK, LEGUN, KE008, KIDAB, RW33L, GE973.

SEOUL/Incheon Intl(RKSI)
RNP RWY 33L

AERONAUTICAL DATA TABULATION

Instrument Approach Procedure Coding Tables

RNP RWY 33L - via PAMBI(IAF) to GE973(MAHF)

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ TCH	Navigation specification	Remarks
001	IF	PAMBI	-	-	-	-	+3 600	-	37°10'54.3"N 126°32'34.4"E	-	RNP APCH	IAF
002	TF	POSOK	-	064 (054.7)	6.2	-	+3 600	-	37°14'30.3"N 126°38'56.6"E	-	RNP APCH	IF
003	TF	LEGUN	-	334 (324.8)	4.6	-	+3 600	-	37°18'14.5"N 126°35'38.6"E	-	RNP APCH	SDF
004	TF	KE008	-	334 (324.8)	3.1	-	+2 600	-	37°20'48.9"N 126°33'21.9"E	-	RNP APCH	SDF
005	TF	KIDAB	-	334 (324.7)	3.1	-	+1 600	-	37°23'23.2"N 126°31'05.1"E	-	RNP APCH	FAF
006	TF	RW33L	Y	334(324.7)	4.7	-	+560	-	37°27'15.21"N 126°27'39.08"E	-3.04/50	RNP APCH	MAPt
007	TF	GE991	-	011(002.5)	9.1	-	-	-	37°36'23.4"N 126°28'09.1"E	-	RNP APCH	-
008	TF	GE982	-	281(272.5)	8.5	-	-	-	37°36'45.2"N 126°17'27.9"E	-	RNP APCH	-
009	TF	GE973	Y	208(199.5)	9.5	-	+4 000	-	37°27'47.0"N 126°13'29.0"E	-	RNP APCH	-
010	HM	GE973	Y	088(078.9)	-	L	-5 000 +3 000	-	37°27'47.0"N 126°13'29.0"E	-	RNP APCH	1 min (Outbound timing)

RNP RWY 33L - via ENPIL(IAF) to GE973(MAHF)

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ TCH	Navigation specification	Remarks
001	IF	ENPIL	-	-	-	-	+7 000	-	37°09'39.0"N 126°43'34.0"E	-	RNP APCH	IAF
002	TF	KE019	-	329 (320.6)	3.0	-	+6 000	-	37°11'58.6"N 126°41'10.5"E	-	RNP APCH	SDF
003	TF	POSOK	-	334 (324.8)	3.1	-	+5 000	-	37°14'30.3"N 126°38'56.6"E	-	RNP APCH	IF
004	TF	LEGUN	-	334 (324.8)	4.6	-	+3 600	-	37°18'14.5"N 126°35'38.6"E	-	RNP APCH	SDF
005	TF	KE008	-	334 (324.8)	3.1	-	+2 600	-	37°20'48.9"N 126°33'21.9"E	-	RNP APCH	SDF
006	TF	KIDAB	-	334 (324.7)	3.1	-	+1 600	-	37°23'23.2"N 126°31'05.1"E	-	RNP APCH	FAF
007	TF	RW33L	Y	334(324.7)	4.7	-	+560	-	37°27'15.21"N 126°27'39.08"E	-3.04/50	RNP APCH	MAPt
008	TF	GE991	-	011(002.5)	9.1	-	-	-	37°36'23.4"N 126°28'09.1"E	-	RNP APCH	-
009	TF	GE982	-	281(272.5)	8.5	-	-	-	37°36'45.2"N 126°17'27.9"E	-	RNP APCH	-
010	TF	GE973	Y	208(199.5)	9.5	-	+4 000	-	37°27'47.0"N 126°13'29.0"E	-	RNP APCH	-
011	HM	GE973	Y	088(078.9)	-	L	-5 000 +3 000	-	37°27'47.0"N 126°13'29.0"E	-	RNP APCH	1 min (Outbound timing)

Change : Information of course/track for POSOK, LEGUN, KE008, KIDAB, RW33L, GE973.

INSTRUMENT APPROACH CHART - ICAO

Note : Approach under ICAO Flight Procedures.

AERODROME ELEV 23 ft
HEIGHTS RELATED TO
THR RWY 33R - ELEV **23** ft

SEOUL	APP	119.75
		121.35
INCHEON	TWR	118.2
		118.8

SEOUL/Incheon Intl(RKSI)

ILS or LOC RWY 33R
CAT II & III

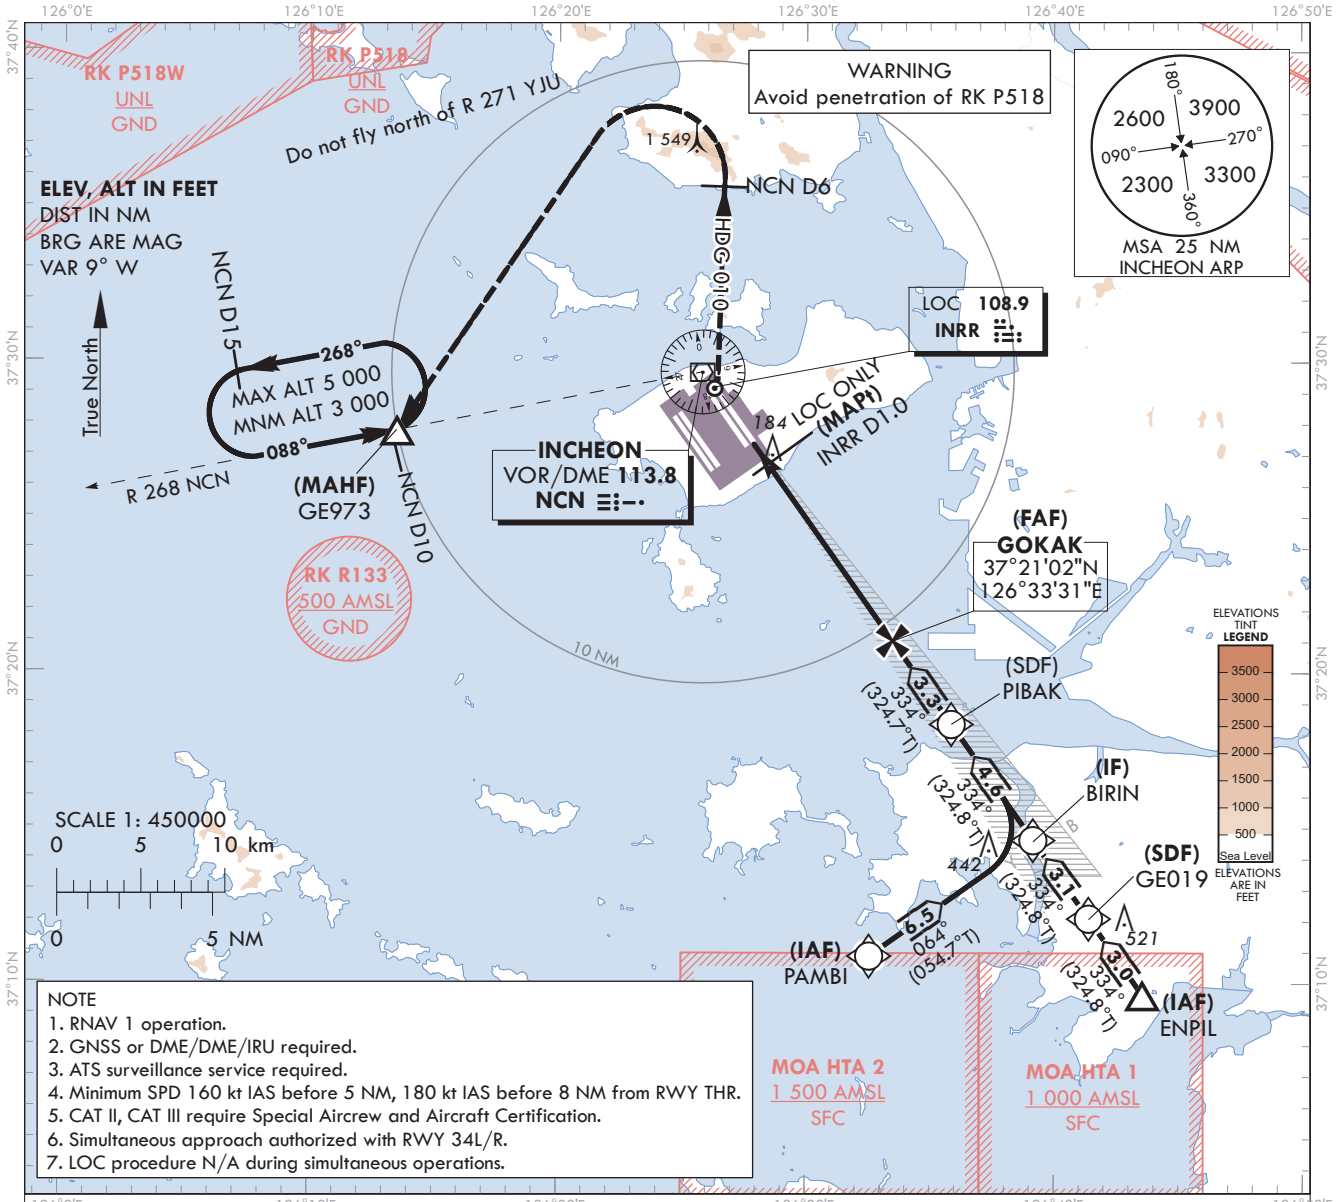

NOTE
1. RNAV 1 operation.
2. GNSS or DME/DME/IRU required.
3. ATS surveillance service required.
4. Minimum SPD 160 kt IAS before 5 NM, 180 kt IAS before 8 NM from RWY THR.
5. CAT II, CAT III require Special Aircrew and Aircraft Certification.
6. Simultaneous approach authorized with RWY 34L/R.
7. LOC procedure N/A during simultaneous operations.

RECOMMENDED PROFILE(LOC ONLY)	DME INRR	7	6	5	4	3	2
Final Approach Gradient 5.36%, 326 ft/NM	ALT(HGT)	2 301 (2 278)	1 975 (1 952)	1 650 (1 627)	1 324 (1 301)	999 (976)	673 (650)

TRANSITION ALT 14 000
TRANSITION LVL FL 140

MISSED APPROACH
Fly RWY heading, climb to 3 000 ft. At 500 ft, turn right heading 010. At NCN 6 DME, turn left direct to GE973.
Hold as published. Do not turn before passing MAPt.

NOTE
1. Missed approach turn limited to 210 kt IAS maximum.
2. Missed approach minimum climb gradient of 2.5% to 3 000 ft (OCH 438 or 417), 4.0% to 2 000 ft (OCH 200 or 100).

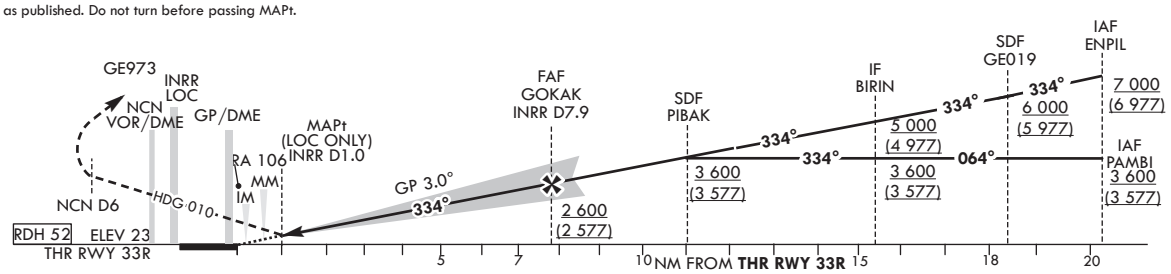

OCA (H)		A	B	C	D
Straight-in Approach	CAT-I (CG 2.5%)	461 (438)			
	CAT-I (CG 4.0%)	223 (200)			
	LOC	440 (417)			
	CAT II	123 (100)			
	CAT III	-			

	Knots	60	90	120	150	180
Rate of descent	V/V fpm	318	478	637	796	955

* Timing Not authorized for defining MAPt.
* Circling Not authorized.

Change : Establishment of rate of descent.

SEOUL/Incheon Intl(RKSI)
ILS or LOC RWY 33R
CAT II & III

AERONAUTICAL DATA TABULATION

ILS/LOC Approach to RWY 33R from PAMBI to BIRIN(IF)	
Fix / Point	Coordinates
PAMBI(IAF)	37°10'54.3"N 126°32'34.4"E
BIRIN(IF)	37°14'38.1"N 126°39'10.4"E

ILS/LOC Approach to RWY 33R from ENPIL to BIRIN(IF)	
Fix / Point	Coordinates
ENPIL(IAF)	37°09'39.0"N 126°43'34.0"E
GE019(SDF)	37°12'06.3"N 126°41'24.3"E
BIRIN(IF)	37°14'38.1"N 126°39'10.4"E

ILS/LOC Approach to RWY 33R from BIRIN(IF) to MAHF		
Fix / Point		Coordinates
PIBAK(SDF)		37°18'22.2"N 126°35'52.3"E
GOKAK(FAF)	BRG 333.60°/7.92 NM INRR	37°21'02.4"N 126°33'30.5"E
D1.0 INRR (MAPt LOC ONLY)	BRG 333.60°/1.00 NM INRR	37°26'41.9"N 126°28'29.3"E
THR RWY 33R		37°27'22.97"N 126°27'52.82"E
INRR DME		37°27'33.2"N 126°27'49.7"E
NCN VOR/DME		37°29'41.7"N 126°25'49.2"E
Climb to 500 ft	HDG 334	-
D6 NCN	HDG 010	-
GE973	BRG 267.93°/10.00 NM NCN	37°27'47.0"N 126°13'29.0"E

INSTRUMENT APPROACH CHART - ICAO

Note : Approach under ICAO Flight Procedures.

AERODROME ELEV 23 ft
HEIGHTS RELATED TO
THR RWY 33R - ELEV **23** ft

SEOUL	APP	119.75
		121.35
INCHEON	TWR	118.2
		118.8

SEOUL/Incheon Intl(RKSI)

RNP RWY 33R

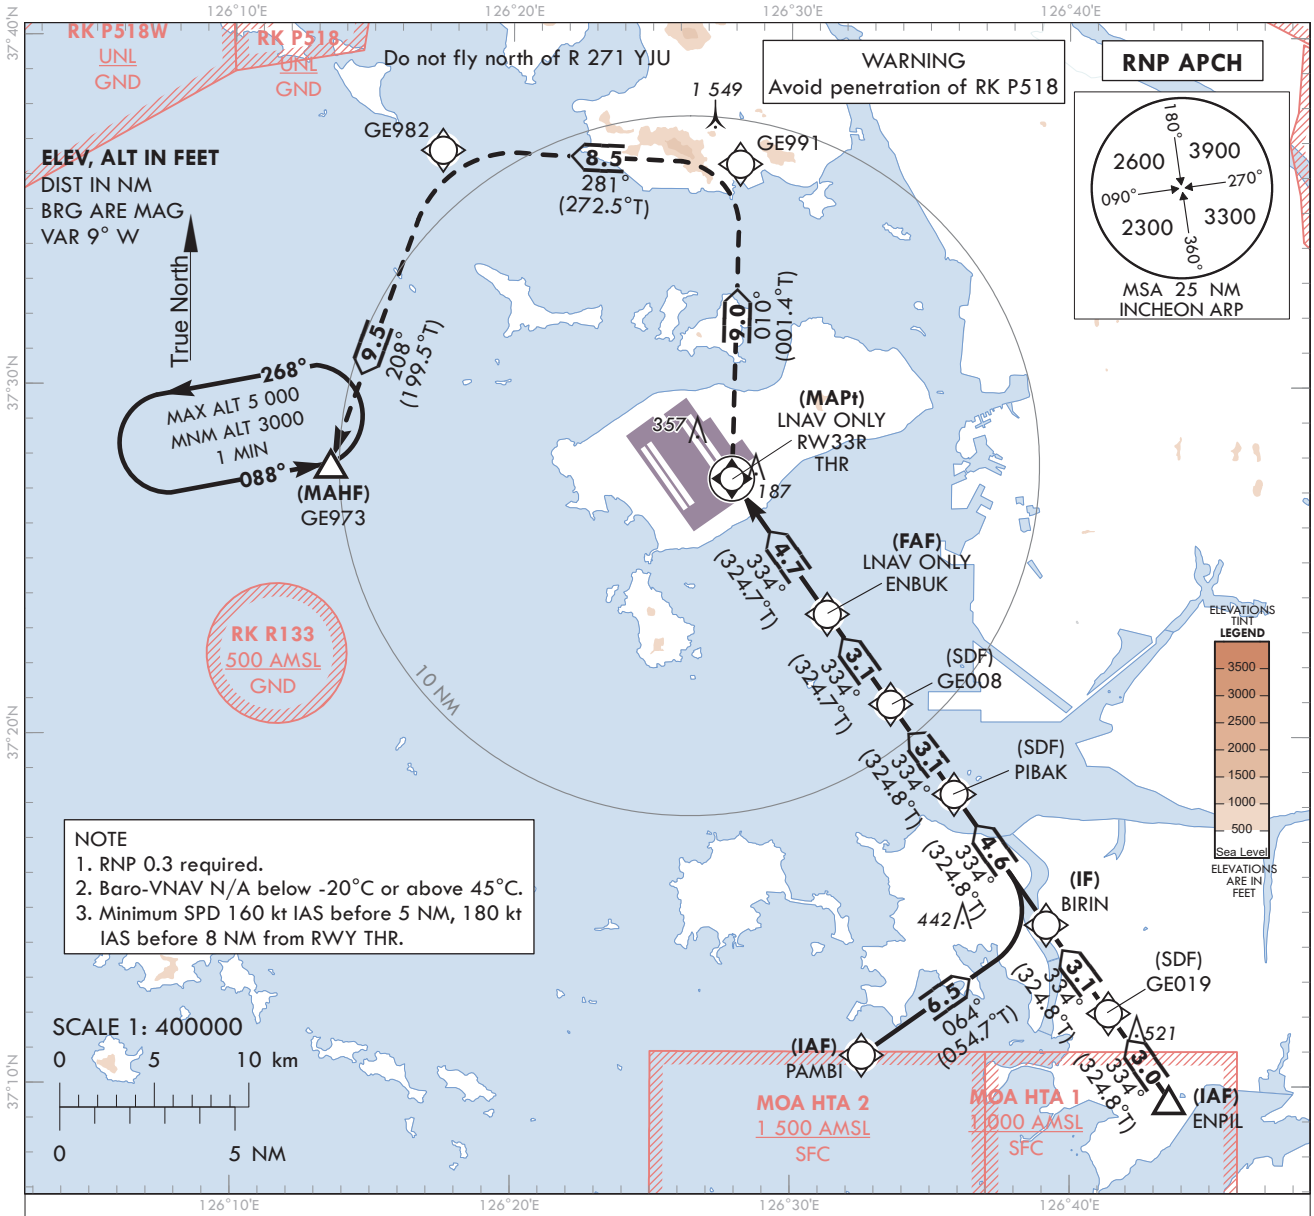

MISSED APPROACH
Climb to 3 000 ft. Track to GE991, GE982 and GE973. Hold as published.

TRANSITION ALT 14 000
TRANSITION LVL FL 140

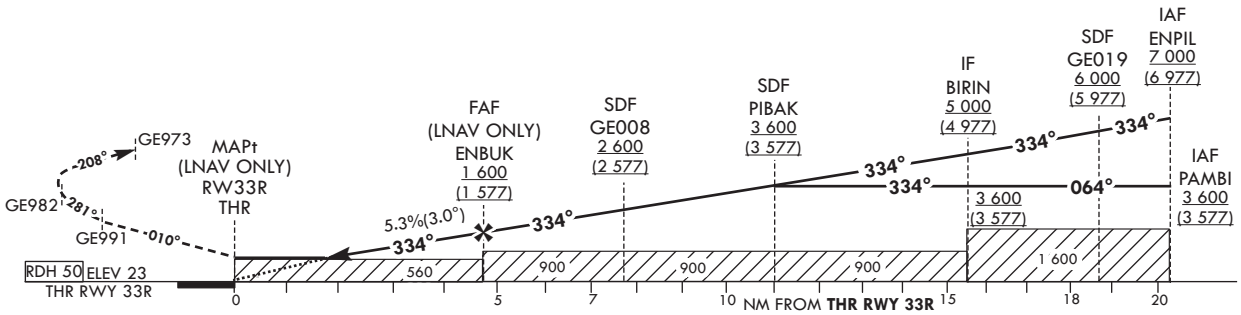

OCA (H)		A	B	C	D
Straight-in Approach	LNAV/VNAV	430 (407)			
	LNAV	560 (537)			

	Knots	60	90	120	150	180
Rate of descent	V/V fpm	323	484	645	807	968

*Timing Not authorized for defining MAPt.
*Circling Not authorized.

Change : Information of course/track for GE019, BIRIN, PIBAK, GE008, ENBUK, RW33R, GE973.

SEOUL/Incheon Intl(RKSI)
RNP RWY 33R

AERONAUTICAL DATA TABULATION

Instrument Approach Procedure Coding Tables

RNP RWY 33R - via PAMBI(IAF) to GE973(MAHF)

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ TCH	Navigation specification	Remarks
001	IF	PAMBI	-	-	-	-	+ 3 600	-	37°10'54.3"N 126°32'34.4"E	-	RNP APCH	IAF
002	TF	BIRIN	-	064 (054.7)	6.5	-	+ 3 600	-	37°14'38.1"N 126°39'10.4"E	-	RNP APCH	IF
003	TF	PIBAK	-	334 (324.8)	4.6	-	+3 600	-	37°18'22.2"N 126°35'52.3"E	-	RNP APCH	SDF
004	TF	GE008	-	334 (324.8)	3.1	-	+2 600	-	37°20'56.6"N 126°33'35.7"E	-	RNP APCH	SDF
005	TF	ENBUK	-	334 (324.7)	3.1	-	+1 600	-	37°23'31.0"N 126°31'18.8"E	-	RNP APCH	FAF
006	TF	RW33R	Y	334 (324.7)	4.7	-	+560	-	37°27'22.97"N 126°27'52.82"E	-3.04/50	RNP APCH	MAPt
007	TF	GE991	-	010 (001.4)	9.0	-	-	-	37°36'23.4"N 126°28'09.1"E	-	RNP APCH	-
008	TF	GE982	-	281 (272.5)	8.5	-	-	-	37°36'45.2"N 126°17'27.9"E	-	RNP APCH	-
009	TF	GE973	Y	208 (199.5)	9.5	-	+3 000	-	37°27'47.0"N 126°13'29.0"E	-	RNP APCH	-
010	HM	GE973	Y	088 (078.9)	-	L	-5 000 +3 000	-	37°27'47.0"N 126°13'29.0"E	-	RNP APCH	1 min (Outbound timing)

RNP RWY 33R - via ENPIL(IAF) to GE973(MAHF)

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ TCH	Navigation specification	Remarks
001	IF	ENPIL	-	-	-	-	+7 000	-	37°09'39.0"N 126°43'34.0"E	-	RNP APCH	IAF
002	TF	GE019	-	334 (324.8)	3.0	-	+6 000	-	37°12'06.3"N 126°41'24.3"E	-	RNP APCH	SDF
003	TF	BIRIN	-	334 (324.8)	3.1	-	+5 000	-	37°14'38.1"N 126°39'10.4"E	-	RNP APCH	IF
004	TF	PIBAK	-	334 (324.8)	4.6	-	+3 600	-	37°18'22.2"N 126°35'52.3"E	-	RNP APCH	SDF
005	TF	GE008	-	334 (324.8)	3.1	-	+2 600	-	37°20'56.6"N 126°33'35.7"E	-	RNP APCH	SDF
006	TF	ENBUK	-	334 (324.7)	3.1	-	+1 600	-	37°23'31.0"N 126°31'18.8"E	-	RNP APCH	FAF
007	TF	RW33R	Y	334 (324.7)	4.7	-	+560	-	37°27'22.97"N 126°27'52.82"E	-3.04/50	RNP APCH	MAPt
008	TF	GE991	-	010 (001.4)	9.0	-	-	-	37°36'23.4"N 126°28'09.1"E	-	RNP APCH	-
009	TF	GE982	-	281(272.5)	8.5	-	-	-	37°36'45.2"N 126°17'27.9"E	-	RNP APCH	-
010	TF	GE973	Y	208 (199.5)	9.5	-	+3 000	-	37°27'47.0"N 126°13'29.0"E	-	RNP APCH	-
011	HM	GE973	Y	088 (078.9)	-	L	-5 000 +3 000	-	37°27'47.0"N 126°13'29.0"E	-	RNP APCH	1 min (Outbound timing)

Change : Information of course/track for GE019, BIRIN, PIBAK, GE008, ENBUK, RW33R, GE973.

INSTRUMENT APPROACH CHART - ICAO

Note : Approach under ICAO Flight Procedures.

AERODROME ELEV 23 ft
HEIGHTS RELATED TO
THR RWY 33R - ELEV **23** ft

SEOUL	APP	119.75 121.35
INCHEON	TWR	118.2 118.8

SEOUL/Incheon Intl(RKSI)

VOR RWY 33R

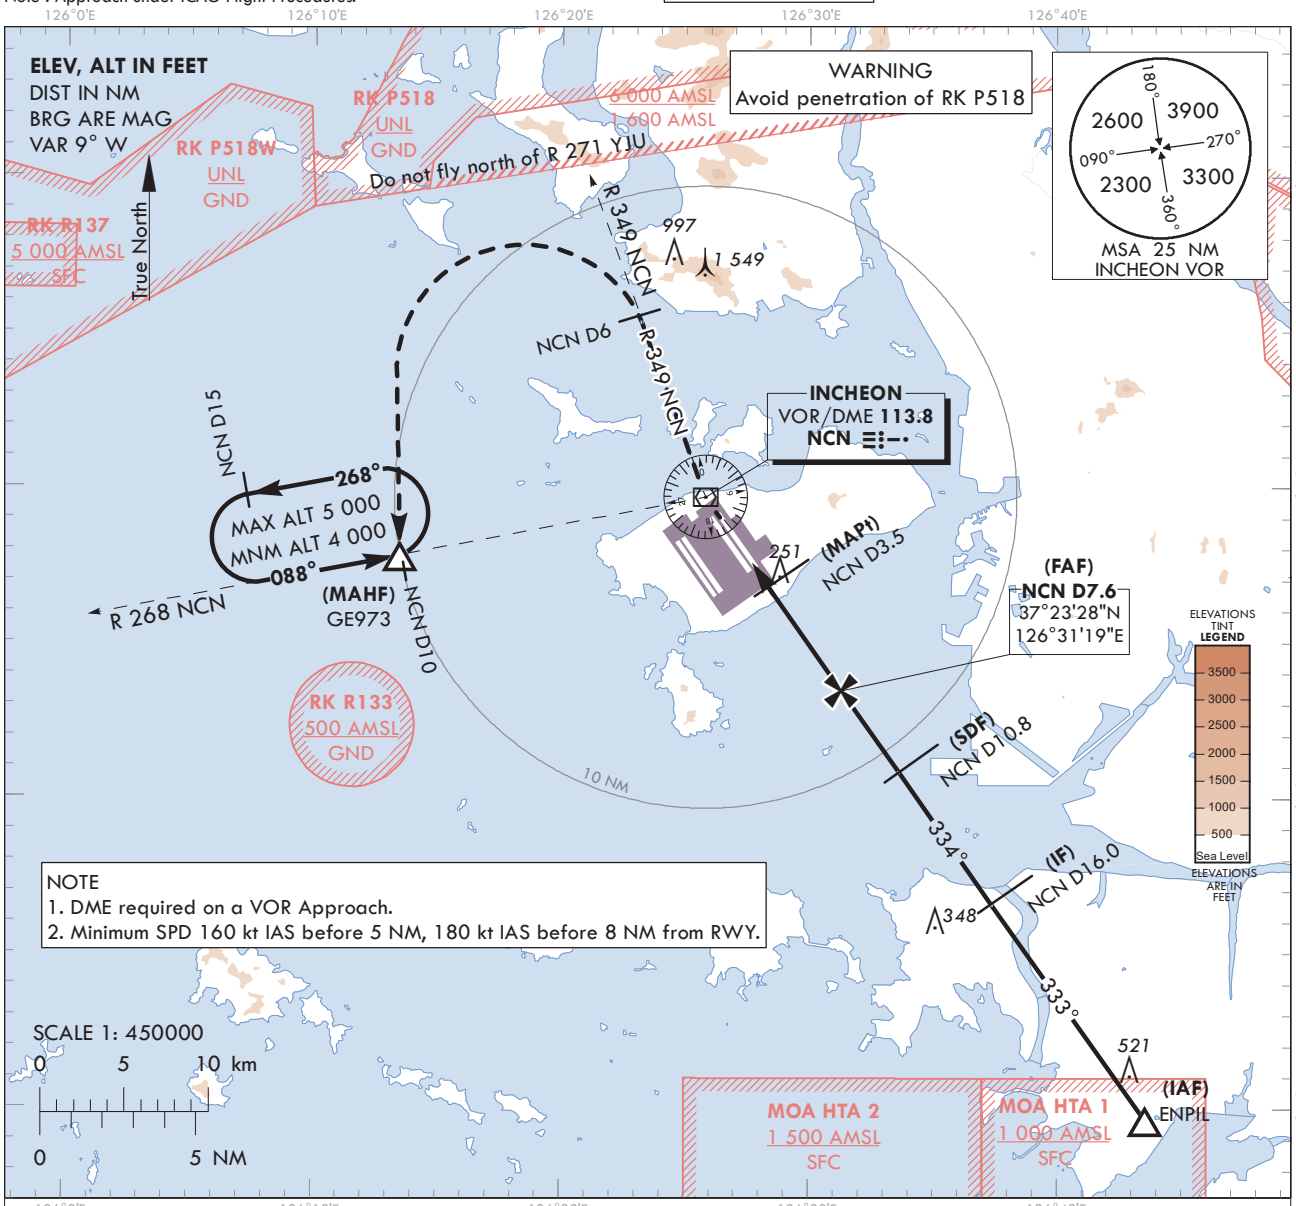

NOTE
1. DME required on a VOR Approach.
2. Minimum SPD 160 kt IAS before 5 NM, 180 kt IAS before 8 NM from RWY.

RECOMMENDED PROFILE	DME NCN	7	6	5
Final Approach Gradient 5.3%(319.8 ft/NM)	ALT(HGT)	1 441(1 418)	1 121(1 098)	801(778)

TRANSITION ALT 14 000
TRANSITION LVL FL 140

MISSED APPROACH
Climb to 4 000 ft via NCN VOR then turn right on R 349 NCN to 6 DME and turn left direct to GE973.
Hold as published.

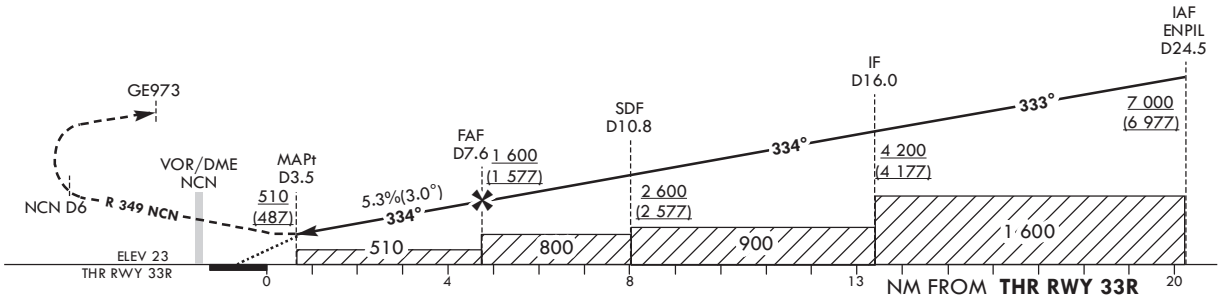

OCA (H)	A	B	C	D
Straight-in Approach	510 (487)			

Rate of descent	Knots	60	90	120	150	180
	V/V fpm	320	480	640	800	960

*Timing Not authorized for defining MAPt.
*Circling Not authorized.

Change : Information of radial and course/track.

SEOUL/Incheon Intl(RKSI)
VOR RWY 33R

AERONAUTICAL DATA TABULATION

VOR Approach to RWY 33R from ENPIL			
Fix / Point		Coordinates	
ENPIL(IAF)		37°09'39.0"N	126°43'34.0"E
D16 NCN(IF)	BRG 333.42°/8.51 NM	37°16'35.5"N	126°37'22.8"E
D10.8 NCN(SDF)	BRG 333.75°/10.80 NM NCN	37°20'51.0"N	126°33'37.9"E
D7.6 NCN(FAF)	BRG 333.75°/7.60 NM NCN	37°23'28.2"N	126°31'19.3"E
D3.5 NCN(MAPt)	BRG 333.75°/3.50 NM NCN	37°26'49.6"N	126°28'21.5"E
THR RWY 33R	Final approach descent angle 3.01°	37°27'22.97"N	126°27'52.82"E
NCN VOR/DME		37°29'41.7"N	126°25'49.2"E
D6 NCN	R 349 NCN/6.00 NM NCN	37°35'19.7"N	126°23'12.9"E
GE973	BRG 267.94°/10.00 NM NCN	37°27'47.0"N	126°13'29.0"E

Change : Information of BRG for IF~MAPt, D6 NCN, GE973.

INSTRUMENT APPROACH CHART - ICAO

Note : Approach under ICAO Flight Procedures.

AERODROME ELEV 23 ft
HEIGHTS RELATED TO
THR RWY 34L - ELEV 23 ft

SEOUL	APP	119.75
		121.35
INCHEON	TWR	118.2
		118.8

SEOUL/Incheon Intl(RKSI)

ILS or LOC RWY 34L CAT II & III

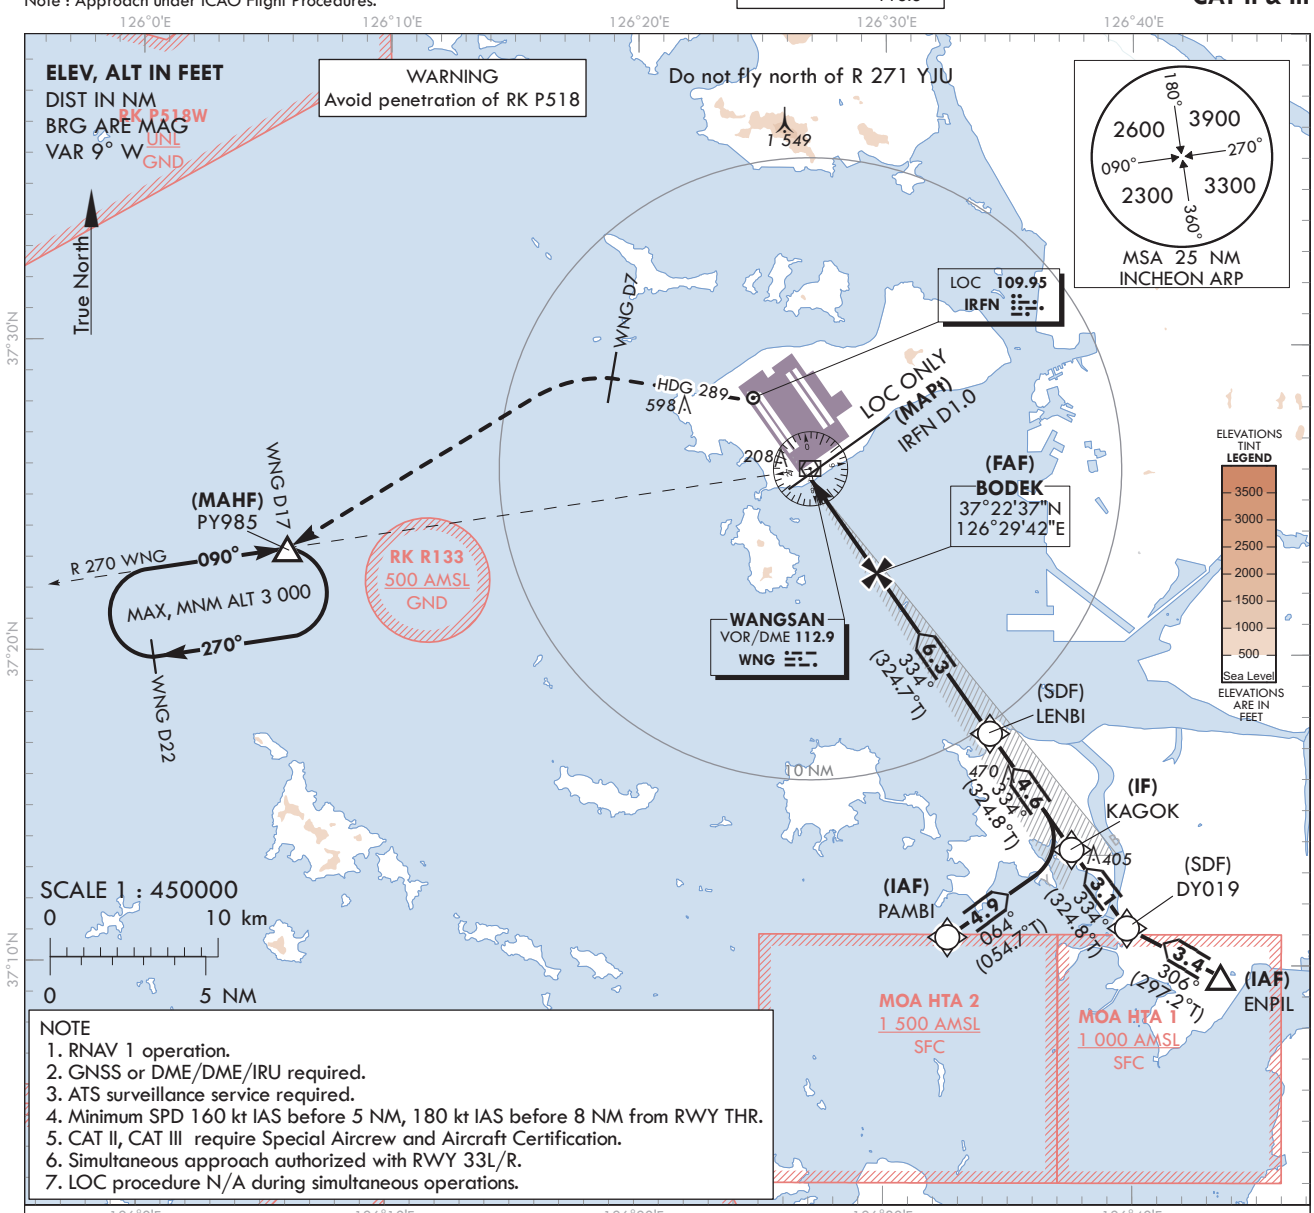

NOTE
1. RNAV 1 operation.
2. GNSS or DME/DME/IRU required.
3. ATS surveillance service required.
4. Minimum SPD 160 kt IAS before 5 NM, 180 kt IAS before 8 NM from RWY THR.
5. CAT II, CAT III require Special Aircrew and Aircraft Certification.
6. Simultaneous approach authorized with RWY 33L/R.
7. LOC procedure N/A during simultaneous operations.

RECOMMENDED PROFILE(LOC ONLY)	DME IRFN	4	3	2
Final Approach Gradient 5.31%, 323 ft/NM	ALT(HGT)	1 313 (1 290)	990 (967)	668 (645)

TRANSITION ALT	14 000
TRANSITION LVL	FL 140

MISSED APPROACH
Fly RWY heading, climb to 3 000 ft. At 500 ft, turn left heading 289. At WNG 7 DME, turn left direct to PY985.
Hold as published. Do not turn before passing MAPt.

NOTE
1. Missed approach turn limited to 210 kt IAS maximum.
2. Missed approach minimum climb gradient of 2.5% to 3 000 ft (OCH 337 or 387), 4.0% to 2 000 ft (OCH 200 or 100).

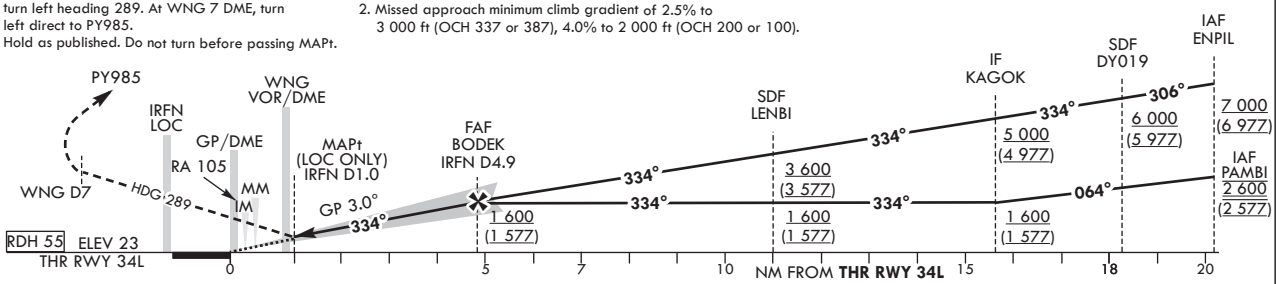

OCA (H)		A	B	C	D
Straight-in Approach	CAT-I (CG 2.5%)	360 (337)			
	CAT-I (CG 4.0%)	223 (200)			
	LOC	410 (387)			
	CAT II	123 (100)			
	CAT III	-			

	Knots	60	90	120	150	180
Rate of descent	V/V fpm	318	478	637	796	955

* Timing Not authorized for defining the MAPt.
* Circling Not authorized.

Change : Establishment of rate of descent.

SEOUL/Incheon Intl(RKSI)
ILS or LOC RWY 34L
CAT II & III

AERONAUTICAL DATA TABULATION

ILS/LOC Approach to RWY 34L from PAMBI to KAGOK(IF)	
Fix / Point	Coordinates
PAMBI(IAF)	37°10'54.3"N 126°32'34.4"E
KAGOK(IF)	37°13'43.8"N 126°37'34.2"E

ILS/LOC Approach to RWY 34L from ENPIL to KAGOK(IF)	
Fix / Point	Coordinates
ENPIL(IAF)	37°09'39.0"N 126°43'34.0"E
DY019(SDF)	37°11'12.0"N 126°39'48.0"E
KAGOK(IF)	37°13'43.8"N 126°37'34.2"E

ILS/LOC Approach to RWY 34L from KAGOK(IF) to MAHF		
Fix / Point		Coordinates
LENBI(SDF)		37°17'27.8"N 126°34'16.1"E
BODEK(FAF)	BRG 333.56°/4.89 NM IRFN	37°22'37.3"N 126°29'41.9"E
D1.0 IRFN (MAPt LOC ONLY)	BRG 333.56°/1.00 NM IRFN	37°25'48.0"N 126°26'52.4"E
WNG VOR/DME		37°25'58.6"N 126°27'00.0"E
THR RWY 34L		37°26'28.50"N 126°26'16.45"E
IRFN DME		37°26'34.7"N 126°26'04.9"E
Climb to 500 ft	HDG 334	-
D7 WNG	HDG 289	-
PY985	BRG 270.00°/17.00 NM WNG	37°23'19.6"N 126°05'55.4"E

INSTRUMENT APPROACH CHART - ICAO

Note : Approach under ICAO Flight Procedures.

AERODROME ELEV 23 ft
HEIGHTS RELATED TO
THR RWY 34L - ELEV **23** ft

SEOUL	APP	119.75 121.35
INCHEON	TWR	118.2 118.8

SEOUL/Incheon Intl(RKSI)

RNP RWY 34L

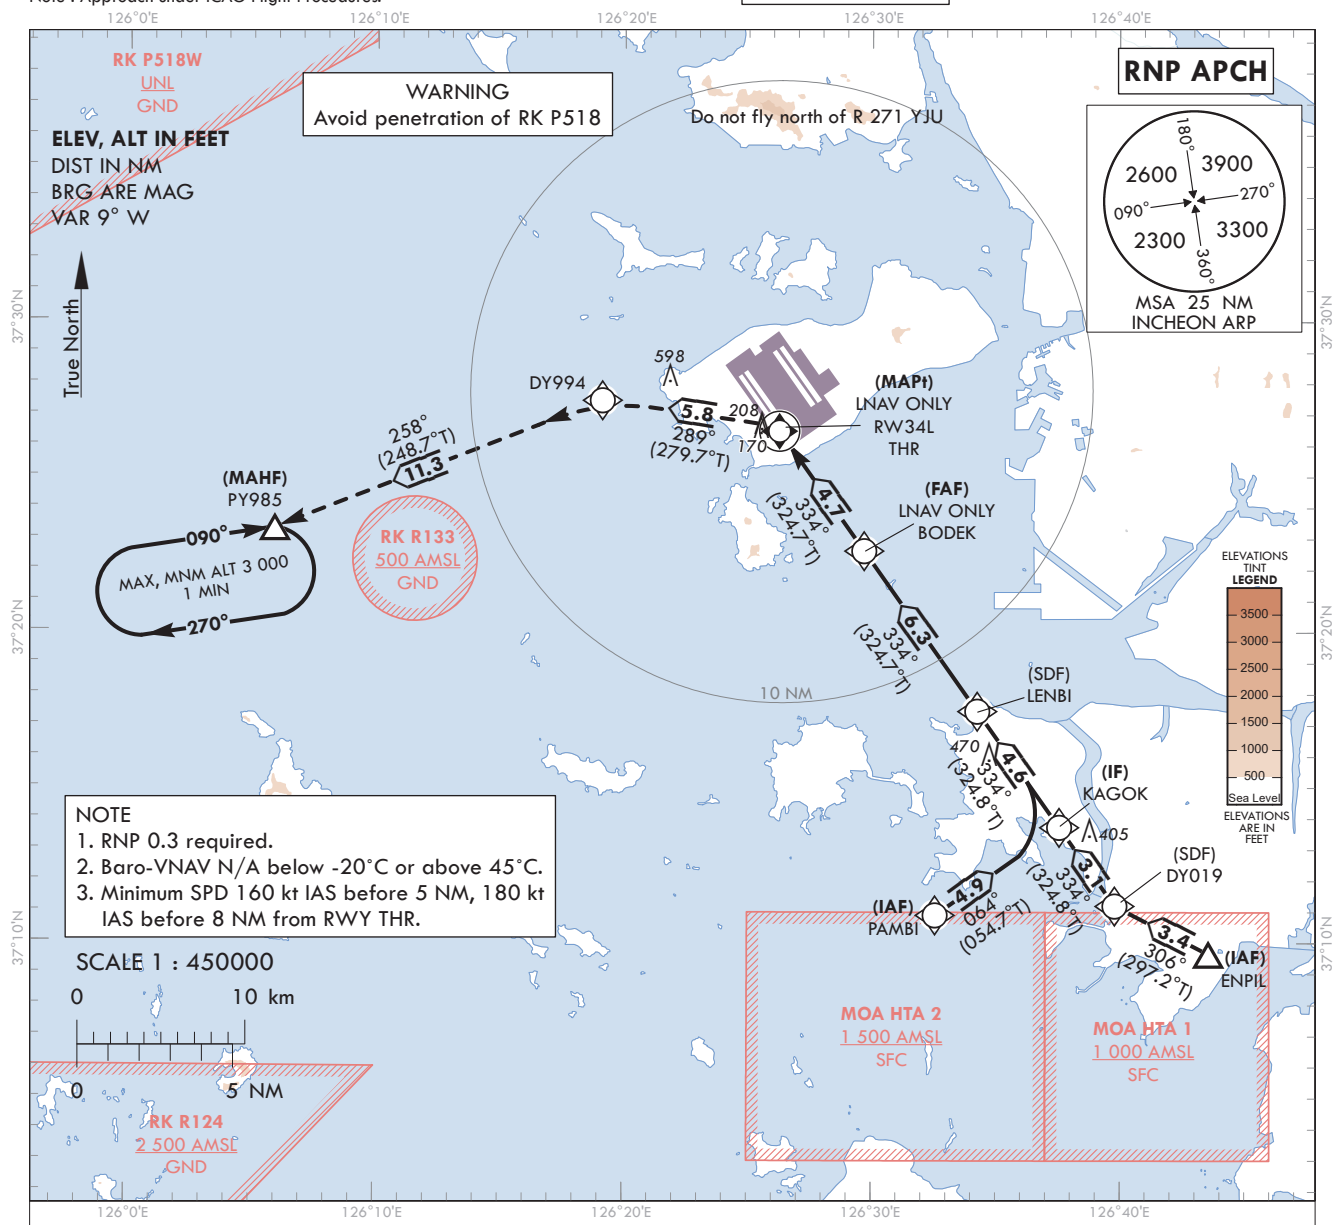

MISSED APPROACH
Climb to 3 000 ft. Track to DY994, PY985. Hold as published.

NOTE
1. Missed approach turn limited to 220 kt IAS maximum.
2. Missed approach climb gradient of 3.0% for ATC purpose.
3. Bank angle 25 degrees applied on missed approach.

TRANSITION ALT	14 000
TRANSITION LVL	FL 140

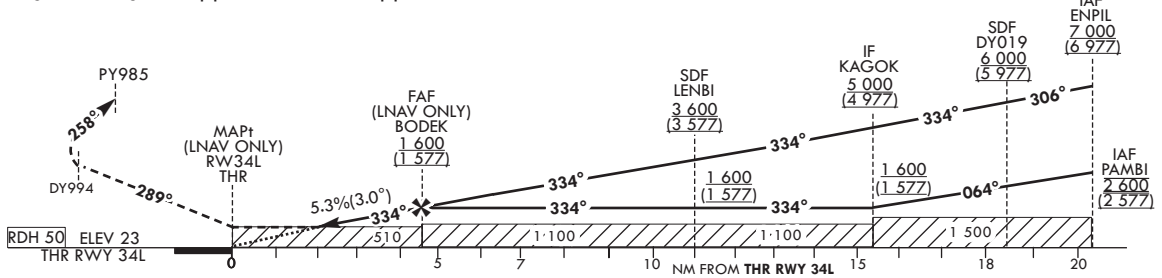

OCA (H)		A	B	C	D
Straight-in Approach	LNAV/VNAV	430 (407)			
	LNAV	510 (487)			

Rate of descent	Knots	60	90	120	150	180
	V/V fpm	324	486	647	809	971

* Timing Not authorized for defining the MAPt.
* Circling Not authorized.

Change : Amended phrase(PY980 → PY985).

Instrument Approach Procedure Coding Tables

RNP RWY 34L - via PAMBI to PY985(MAHF)

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	PAMBI	-	-	-	-	@2 600	-	37°10'54.3"N 126°32'34.4"E	-	RNP APCH	IAF
002	TF	KAGOK	-	064 (054.7)	4.9	-	+1 600	-	37°13'43.8"N 126°37'34.2"E	-	RNP APCH	IF
003	TF	LENBI	-	334 (324.8)	4.6	-	+1 600	-	37°17'27.8"N 126°34'16.1"E	-	RNP APCH	SDF
004	TF	BODEK	-	334 (324.7)	6.3	-	+1 600	-	37°22'37.3"N 126°29'41.9"E	-	RNP APCH	FAF
005	TF	RW34L	Y	334 (324.7)	4.7	-	+510	-	37°26'28.50"N 126°26'16.45"E	-3.05/50	RNP APCH	MAPt
006	TF	DY994	-	289 (279.7)	5.8	-	-	-220	37°27'26.9"N 126°19'07.5"E	-	RNP APCH	Bank Angle 25°
007	TF	PY985	Y	258 (248.7)	11.3	-	@3 000	-220	37°23'19.6"N 126°05'55.4"E	-	RNP APCH	MAHF
008	HM	PY985	Y	090 (080.9)	-	R	@3 000	-	37°23'19.6"N 126°05'55.4"E	-	RNP APCH	1 min (Outbound timing)

RNP RWY 34L - via ENPIL(IAF) to PY985(MAHF)

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	ENPIL	-	-	-	-	+7 000	-	37°09'39.0"N 126°43'34.0"E	-	RNP APCH	IAF
002	TF	DY019	-	306 (297.2)	3.4	-	+6 000	-	37°11'12.0"N 126°39'48.0"E	-	RNP APCH	SDF
003	TF	KAGOK	-	334 (324.8)	3.1	-	+5 000	-	37°13'43.8"N 126°37'34.2"E	-	RNP APCH	IF
004	TF	LENBI	-	334 (324.8)	4.6	-	+3 600	-	37°17'27.8"N 126°34'16.1"E	-	RNP APCH	SDF
005	TF	BODEK	-	334 (324.7)	6.3	-	+1 600	-	37°22'37.3"N 126°29'41.9"E	-	RNP APCH	FAF
006	TF	RW34L	Y	334 (324.7)	4.7	-	+510	-	37°26'28.50"N 126°26'16.45"E	-3.05/50	RNP APCH	MAPt
007	TF	DY994	-	289 (279.7)	5.8	-	-	-220	37°27'26.9"N 126°19'07.5"E	-	RNP APCH	Bank Angle 25°
008	TF	PY985	Y	258 (248.7)	11.3	-	@3 000	-220	37°23'19.6"N 126°05'55.4"E	-	RNP APCH	MAHF
009	HM	PY985	Y	090 (080.9)	-	R	@3 000	-	37°'23.19.6"N 126°05'55.4"E	-	RNP APCH	1 min (Outbound timing)

INSTRUMENT APPROACH CHART - ICAO

Note : Approach under ICAO Flight Procedures.

AERODROME ELEV 23 ft
HEIGHTS RELATED TO
THR RWY 34R - ELEV **23** ft

SEOUL	APP	119.75
		121.35
INCHEON	TWR	118.2
		118.8

SEOUL/Incheon Intl(RKSI)

ILS or LOC RWY 34R
CAT II & III

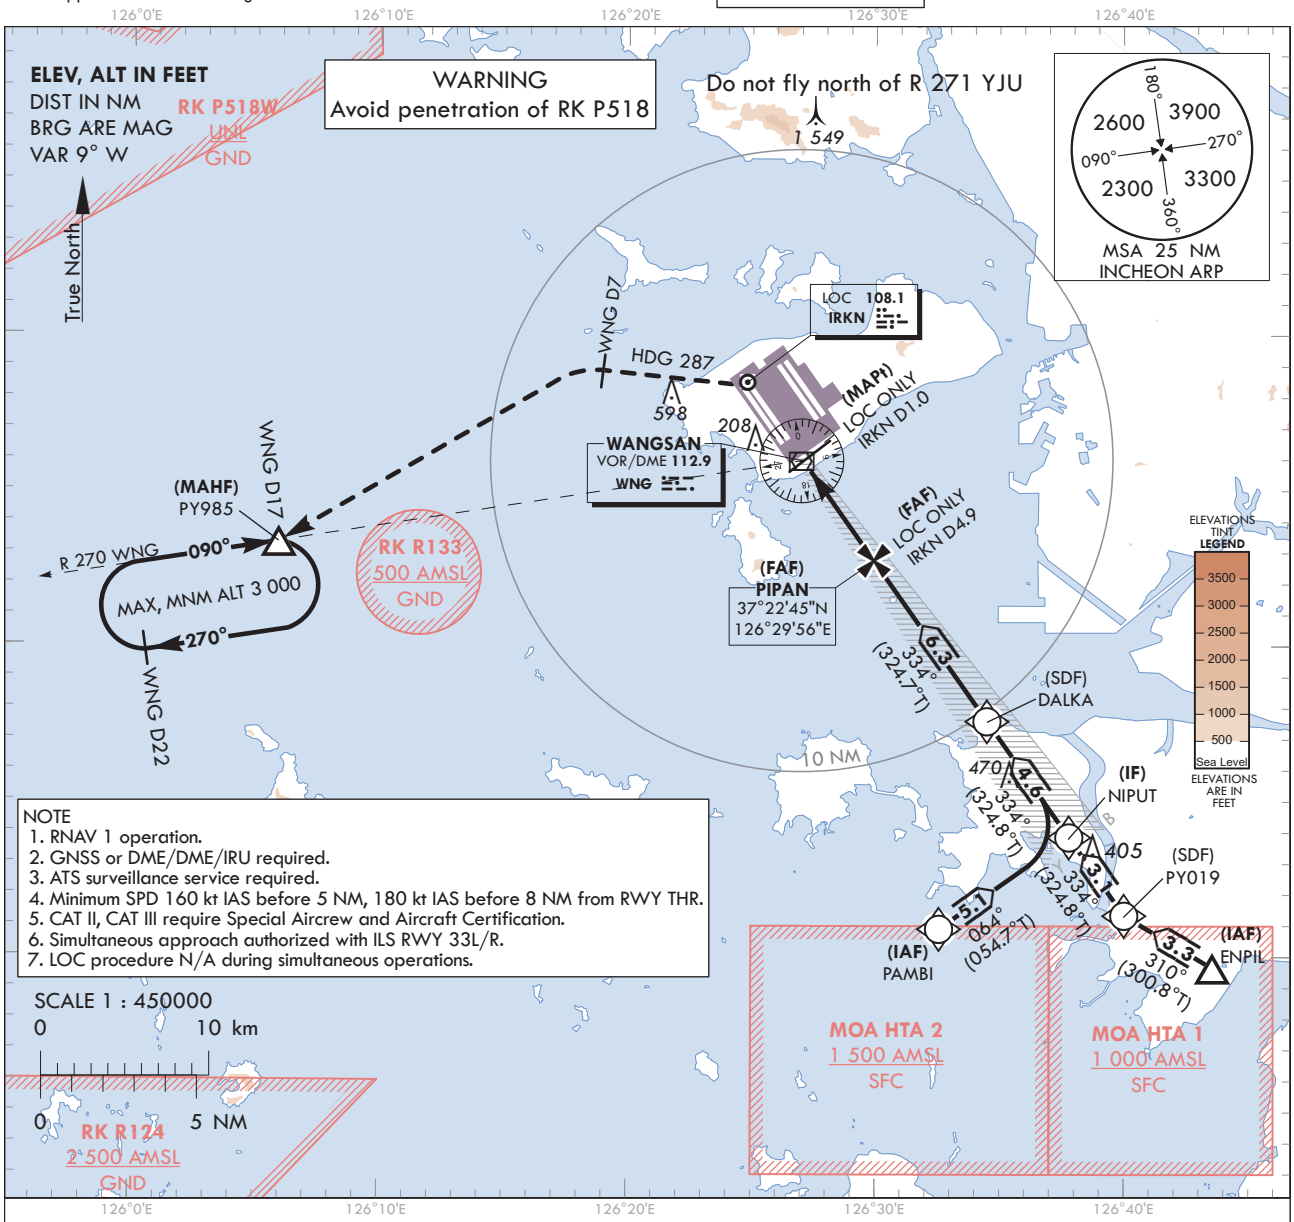

NOTE
1. RNAV 1 operation.
2. GNSS or DME/DME/IRU required.
3. ATS surveillance service required.
4. Minimum SPD 160 kt IAS before 5 NM, 180 kt IAS before 8 NM from RWY THR.
5. CAT II, CAT III require Special Aircrew and Aircraft Certification.
6. Simultaneous approach authorized with ILS RWY 33L/R.
7. LOC procedure N/A during simultaneous operations.

RECOMMENDED PROFILE(LOC ONLY)	DME IRKN	4	3	2
Final Approach Gradient 5.31%, 323 ft/NM	ALT(HGT)	1 313 (1 290)	990 (967)	668 (645)

TRANSITION ALT	14 000
TRANSITION LVL	FL 140

MISSED APPROACH
Fly RWY heading, climb to 3 000 ft. At 500 ft, turn left heading 287. At WNG 7 DME, turn left direct to PY985. Hold as published. Do not turn before passing MAPt.

NOTE
1. Missed approach turn limited to 210 kt IAS maximum.
2. Missed approach minimum climb gradient of 2.5% to 3 000 ft (OCH 337 or 387), 4.0% to 2 000 ft (OCH 200 or 100).

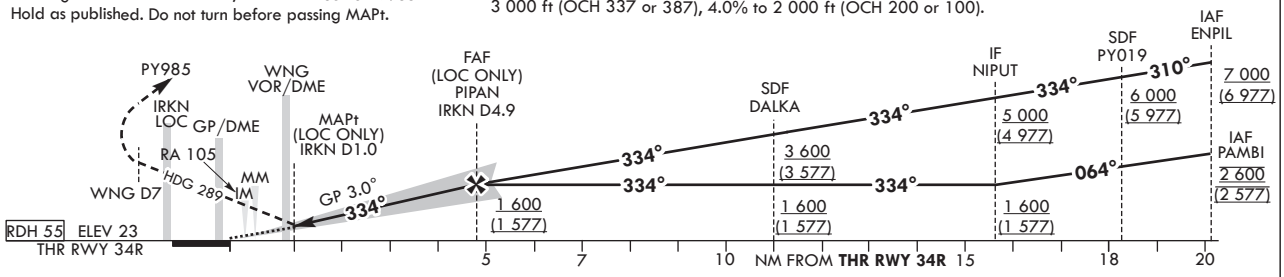

OCA (H)		A	B	C	D
Straight-in Approach	CAT-I (CG 2.5%)	360 (337)			
	CAT-I (CG 4.0%)	223 (200)			
	LOC	410 (387)			
	CAT II	123 (100)			
	CAT III	-			

	Knots	60	90	120	150	180
Rate of descent	V/V fpm	318	478	637	796	955

* Timing Not authorized for defining MAPt.
* Circling Not authorized.

Change : Establishment of rate of descent.

SEOUL/Incheon Intl(RKSI)
ILS or LOC RWY 34R
CAT II & III

AERONAUTICAL DATA TABULATION

ILS/LOC Approach to RWY 34R from PAMBI to NIPUT(IF)	
Fix / Point	Coordinates
PAMBI(IAF)	37°10'54.3"N 126°32'34.4"E
NIPUT(IF)	37°13'51.5"N 126°37'47.9"E

ILS/LOC Approach to RWY 34R from ENPIL to NIPUT(IF)	
Fix / Point	Coordinates
ENPIL(IAF)	37°09'39.0"N 126°43'34.0"E
PY019(SDF)	37°11'20.4"N 126°40'01.2"E
NIPUT(IF)	37°13'51.5"N 126°37'47.9"E

ILS/LOC Approach to RWY 34R from NIPUT(IF) to MAHF		
Fix / Point		Coordinates
DALKA(SDF)		37°17'35.6"N 126°34'29.8"E
PIPAN(FAF LOC ONLY)	BRG 333.56°/4.89 NM IRKN	37°22'45.1"N 126°29'55.6"E
D1.0 IRKN(MAPt LOC ONLY)	BRG 333.56°/1.00 NM IRKN	37°25'55.7"N 126°27'06.3"E
WNG VOR/DME		37°25'58.6"N 126°27'00.0"E
THR RWY 34R		37°26'36.29"N 126°26'30.21"E
IRKN DME		37°26'42.5"N 126°26'18.8"E
Climb to 500 ft	HDG 334	-
D7 WNG	HDG 287	-
PY985	BRG 270.00°/17.00 NM WNG	37°23'19.6"N 126°05'55.4"E

INSTRUMENT APPROACH CHART - ICAO

AERODROME ELEV 23 ft
HEIGHTS RELATED TO
THR RWY 34R - ELEV **23** ft

SEOUL	APP	119.75
		121.35
INCHEON	TWR	118.2
		118.8

SEOUL/Incheon Intl(RKSI)

RNP RWY 34R

Note : Approach under ICAO Flight Procedures.

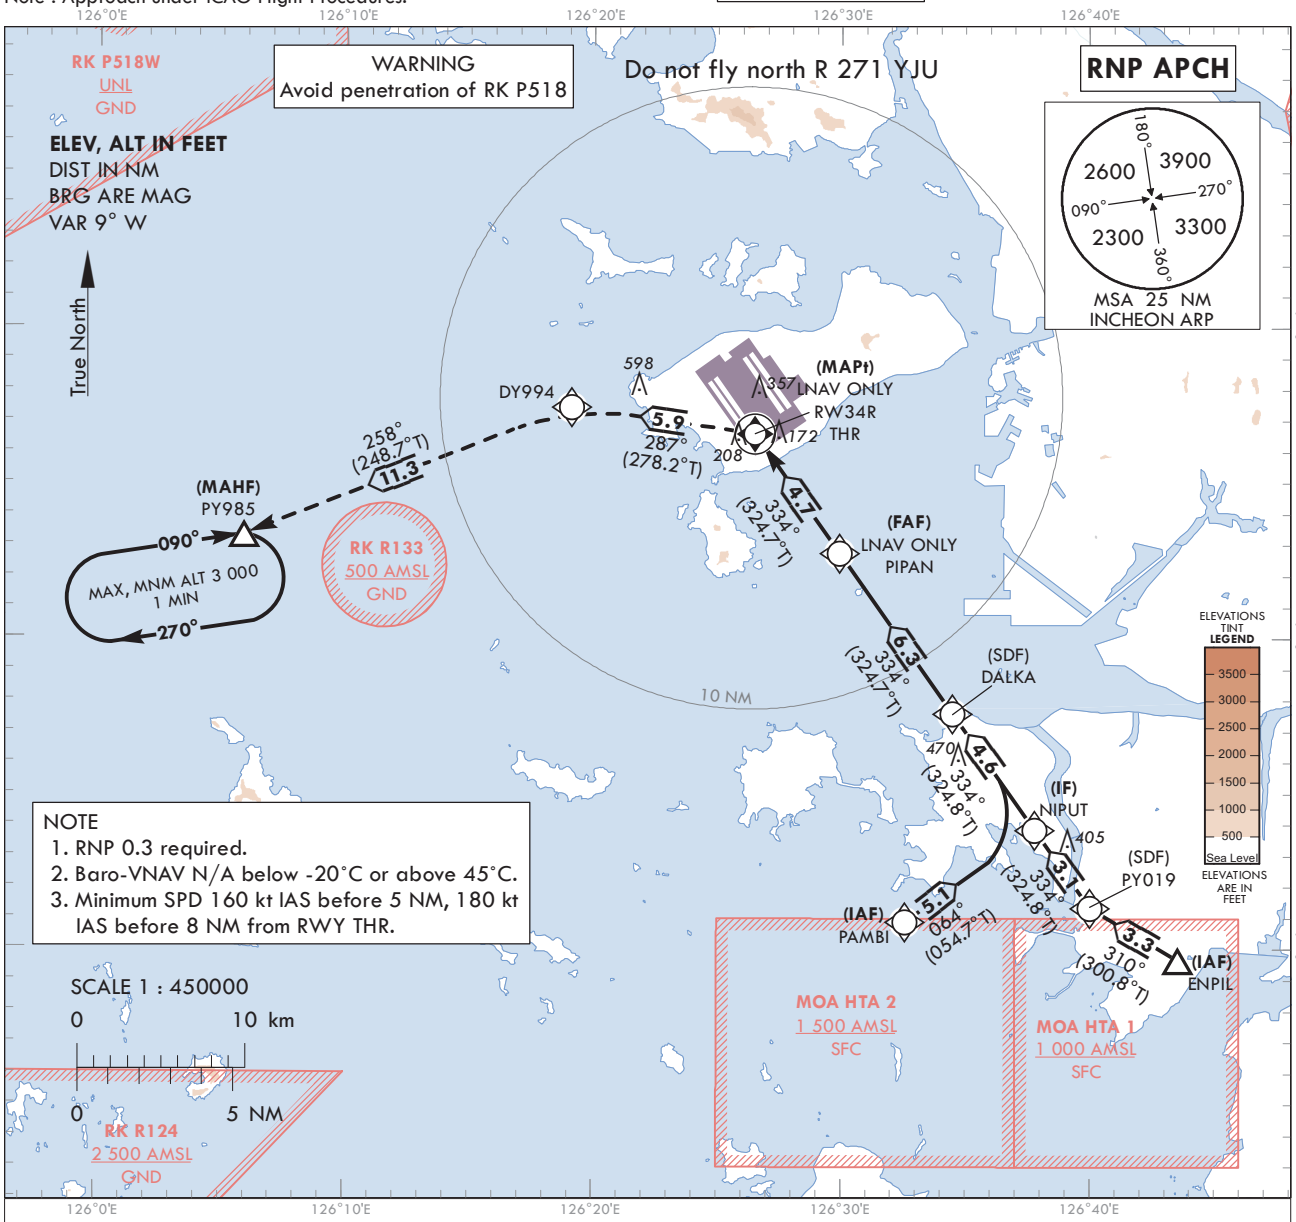

MISSED APPROACH
Climb to 3 000 ft. Track to DY994, PY985. Hold as published.

TRANSITION ALT	14 000
TRANSITION LVL	FL 140

NOTE
1. Missed approach turn limited to 220 kt IAS maximum.
2. Missed approach climb gradient of 3.0% for ATC purpose.
3. Bank angle 25 degrees applied on missed approach.

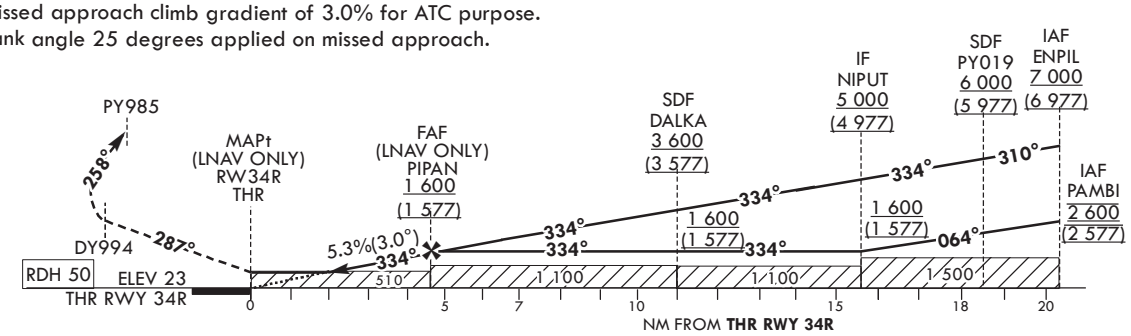

OCA (H)		A	B	C	D
Straight-in Approach	LNAV/VNAV	430 (407)			
	LNAV	510 (487)			

Rate of descent	Knots	60	90	120	150	180
	V/V fpm	324	486	647	809	971

* Timing Not authorized for defining MAPt.
*Circling Not authorized.

Change : Information of instrument approach procedure(RNP RWY 34R).

SEOUL/Incheon Intl(RKSI)
RNP RWY 34R

AERONAUTICAL DATA TABULATION

Instrument Approach Procedure Coding Tables

RNP RWY 34R - via PAMBI(IAF) to PY985(MAHF)

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ TCH	Navigation specification	Remarks
001	IF	PAMBI	-	-	-	-	@2 600	-	37°10'54.3"N 126°32'34.4"E	-	RNP APCH	IAF
002	TF	NIPUT	-	064 (054.7)	5.1	-	+1 600	-	37°13'51.5"N 126°37'47.9"E	-	RNP APCH	IF
003	TF	DALKA	-	334 (324.8)	4.6	-	+1 600	-	37°17'35.6"N 126°34'29.8"E	-	RNP APCH	SDF
004	TF	PIPAN	-	334 (324.7)	6.3	-	+1 600	-	37°22'45.1"N 126°29'55.6"E	-	RNP APCH	FAF
005	TF	RW34R	Y	334 (324.7)	4.7	-	+510	-	37°26'36.29"N 126°26'30.21"E	-3.05/50	RNP APCH	MAPt
006	TF	DY994	-	287 (278.2)	5.9	-	-	-220	37°27'26.9"N 126°19'07.5"E	-	RNP APCH	Bank Angle 25°
007	TF	PY985	Y	258 (248.7)	11.3	-	@3 000	-220	37°23'19.6"N 126°05'55.4"E	-	RNP APCH	MAHF
008	HM	PY985	Y	090 (080.9)	-	R	@3 000	-	37°23'19.6"N 126°05'55.4"E	-	RNP APCH	1 min (Outbound timing)

RNP RWY 34R - via ENPIL(IAF) to PY985(MAHF)

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ TCH	Navigation specification	Remarks
001	IF	ENPIL	-	-	-	-	+7 000	-	37°09'39.0"N 126°43'34.0"E	-	RNP APCH	IAF
002	TF	PY019	-	310 (300.8)	3.3	-	+6 000	-	37°11'20.4"N 126°40'01.2"E	-	RNP APCH	SDF
003	TF	NIPUT	-	334 (324.8)	3.1	-	+5 000	-	37°13'51.5"N 126°37'47.9"E	-	RNP APCH	IF
004	TF	DALKA	-	334 (324.8)	4.6	-	+3 600	-	37°17'35.6"N 126°34'29.8"E	-	RNP APCH	SDF
005	TF	PIPAN	-	334 (324.7)	6.3	-	+1 600	-	37°22'45.1"N 126°29'55.6"E	-	RNP APCH	FAF
006	TF	RW34R	Y	334 (324.7)	4.7	-	+510	-	37°26'36.29"N 126°26'30.21"E	-3.05/50	RNP APCH	MAPt
007	TF	DY994	-	287 (278.2)	5.9	-	-	-220	37°27'26.9"N 126°19'07.5"E	-	RNP APCH	Bank Angle 25°
008	TF	PY985	Y	258 (248.7)	11.3	-	@3 000	-220	37°23'19.6"N 126°05'55.4"E	-	RNP APCH	MAHF
009	HM	PY985	Y	090 (080.9)	-	R	@3 000	-	37°23'19.6"N 126°05'55.4"E	-	RNP APCH	1 min (Outbound timing)

Change : Information of instrument approach procedure(RNP RWY 34R).