INSTRUMENT APPROACH CHART-ICAO

Note : Approach under ICAO Flight Procedures.

AERODROME ELEV 59 ft
HEIGHTS RELATED TO
THR RWY 14L - ELEV **38** ft

SEOUL APP	119.75 119.1
GIMPO TWR	118.1 118.05

SEOUL/Gimpo Intl(RKSS)

ILS Z or LOC Z RWY 14L

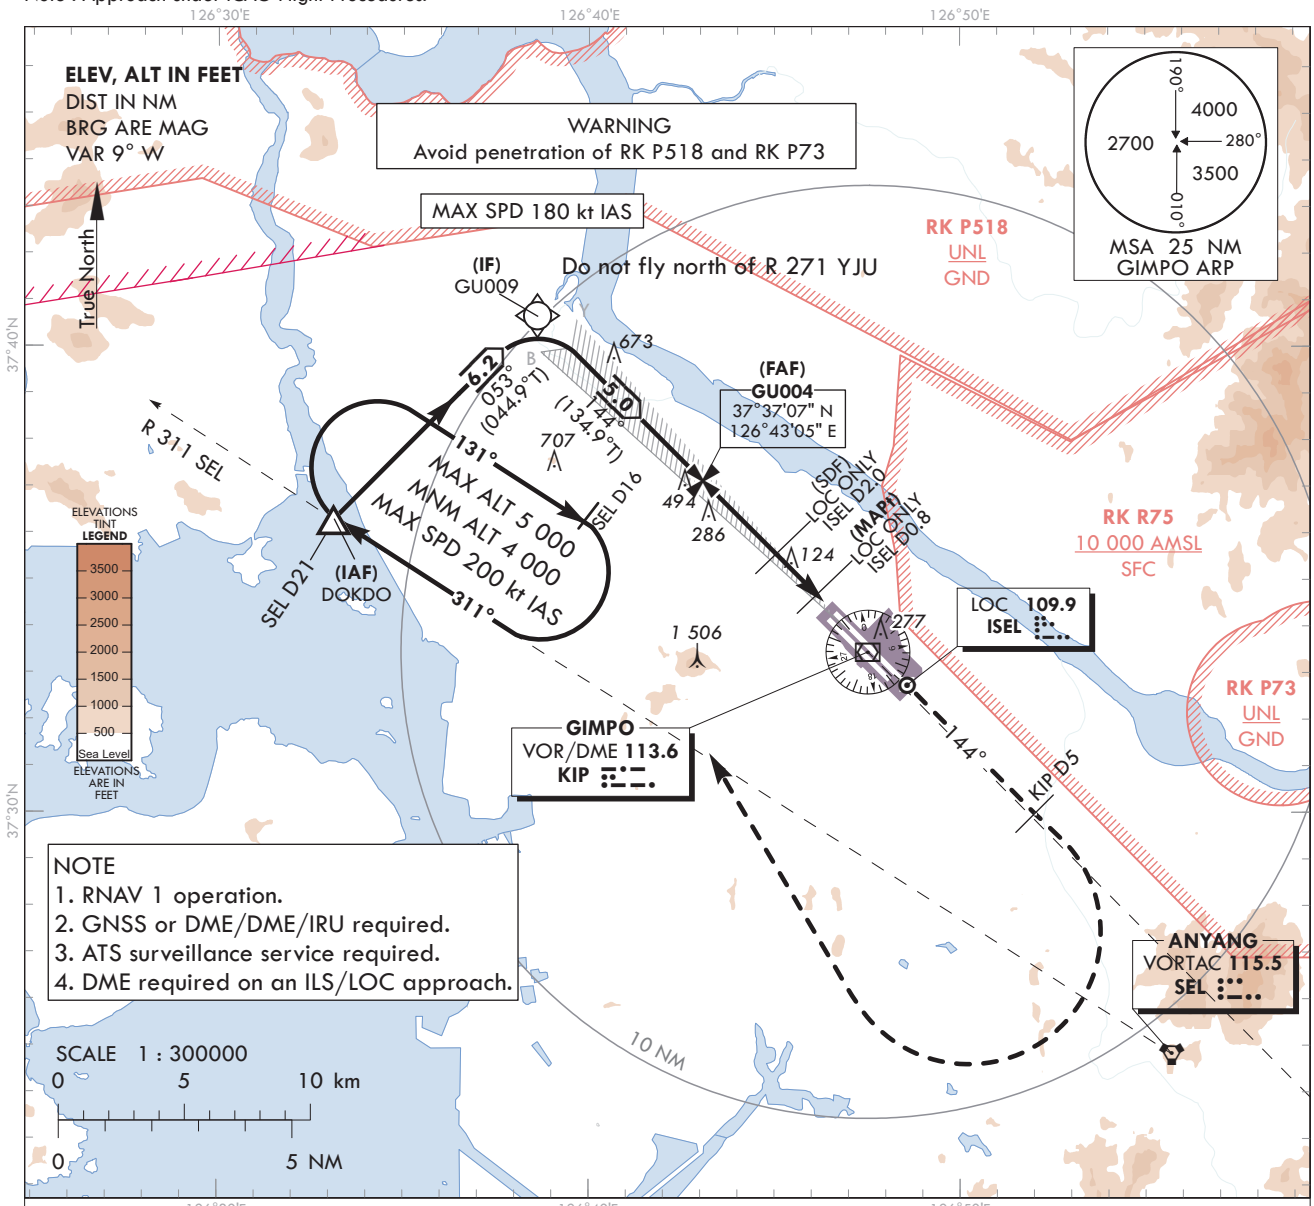

RECOMMENDED PROFILE	DME ISEL	4	3	2
Final Approach Gradient 5.24%, 318 ft/NM	ALT(HGT)	1 305 (1 267)	986 (948)	670 (632)

MISSED APPROACH
Climb to 4 000 ft on HDG 144 to KIP D5
then turn right to intercept and proceed via R 311 SEL
to DOKDO. Hold as published.

NOTE
1. Missed approach turn limited to 220 kt IAS maximum.

TRANSITION ALT 14 000
TRANSITION LVL FL 140

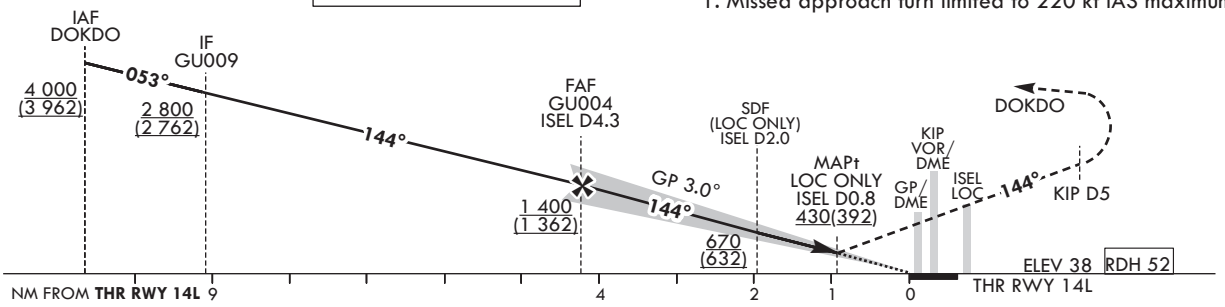

OCA (H)		A	B	C	D
Straight-in Approach	CAT-I	238 (200)			
	LOC	430 (392)			

	Knots	60	90	120	150	180
Rate of descent	V/V fpm	318	478	637	796	955

*Timing Not authorized for defining MAPt.
*Circling Not authorized.

Change : Establishment of rate of descent and Amended recommended profile.

SEOUL/Gimpo Intl(RKSS)
ILS Z or LOC Z RWY 14L

AERONAUTICAL DATA TABULATION

ILS/LOC Z Approach to RWY 14L from DOKDO			
Fix / Point		Coordinates	
DOKDO(IAF)		37°36'17.1"N	126°33'07.1"E
GU009(IF)	BRG 53.48°/6.20 NM	37°40'40.0"N	126°38'36.6"E
GU004(FAF)	BRG 143.54°/4.30 NM ISEL	37°37'07.1"N	126°43'04.8"E
D2.0 ISEL (SDF LOC ONLY)	BRG 143.54°/2.00 NM ISEL	37°35'32.2"N	126°45'04.3"E
D0.8 ISEL (MAPt LOC ONLY)	BRG 143.54°/0.80 NM ISEL	37°34'41.1"N	126°46'08.4"E
THR RWY 14L		37°34'14.55"N	126°46'41.80"E
ISEL DME		37°34'03.8"N	126°46'48.1"E
KIP VOR/DME		37°33'27.1"N	126°47'31.3"E
D5 KIP	HDG 144	37°29'58.1"N	126°52'02.1"E
DOKDO	R 311 SEL/21.00 NM	37°36'17.1"N	126°33'07.1"E

INSTRUMENT APPROACH CHART - ICAO

Note : Approach under ICAO Flight Procedures.

AERODROME ELEV 59 ft
HEIGHTS RELATED TO
THR RWY 14L - ELEV **38** ft

SEOUL APP	119.75
	119.1
GIMPO TWR	118.1
	118.05

SEOUL/Gimpo Intl(RKSS)

ILS Y or LOC Y RWY 14L

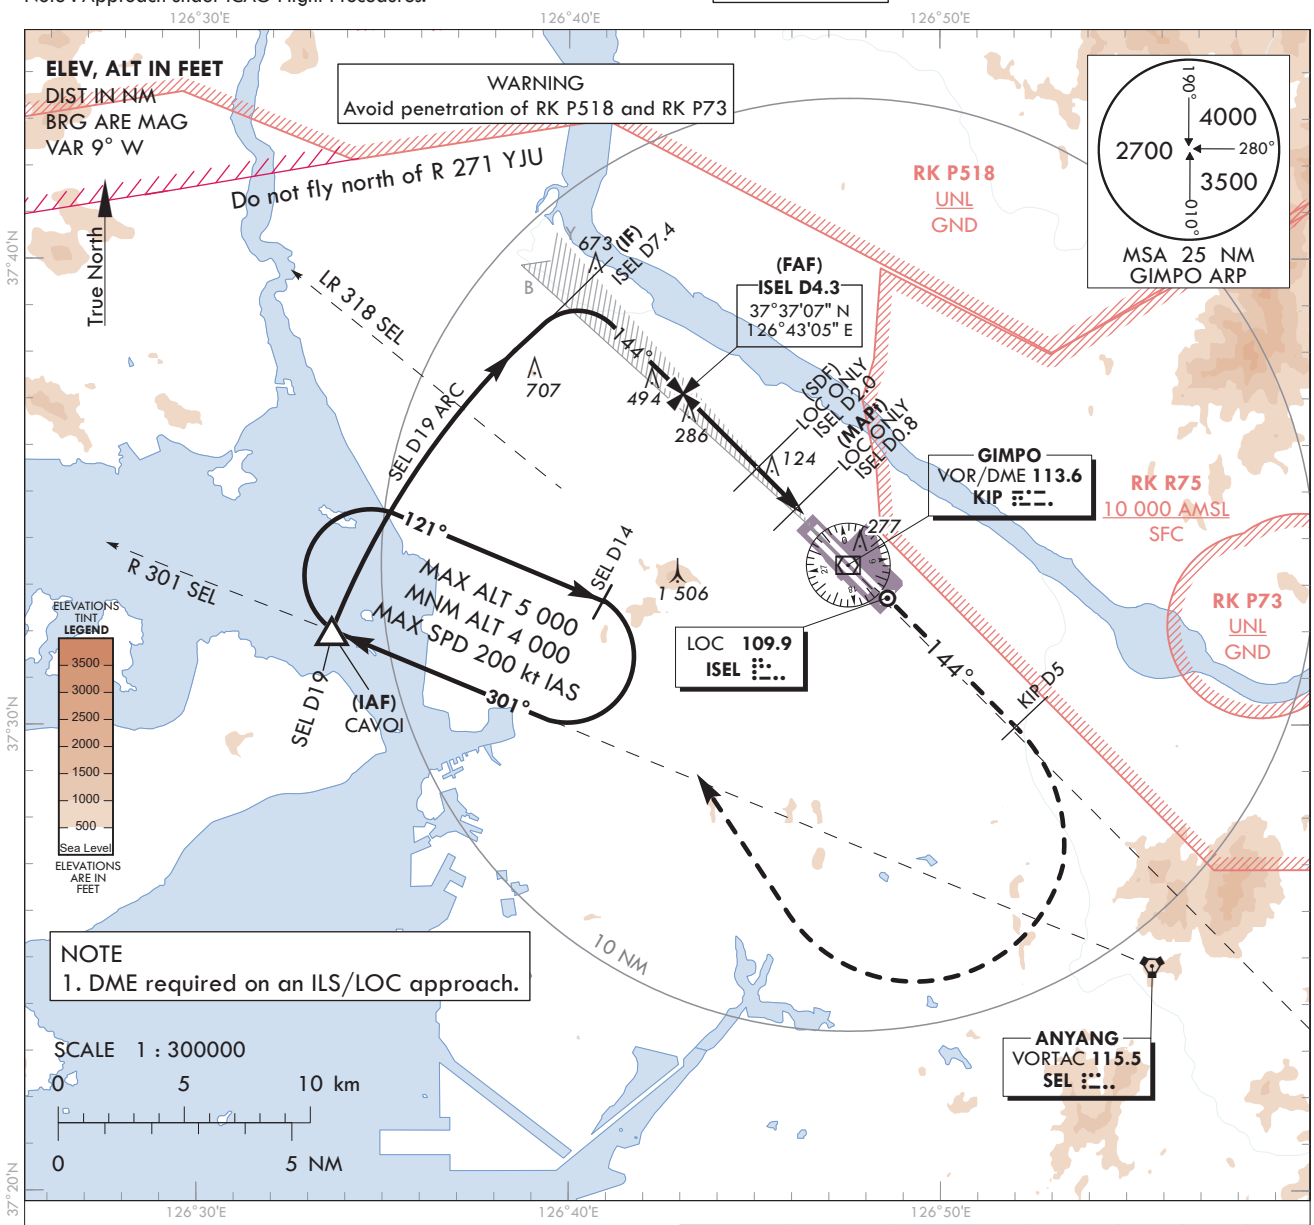

TRANSITION ALT 14 000
TRANSITION LVL FL 140

MISSED APPROACH
Climb to 4 000 ft on HDG 144 to KIP D5 then turn right to intercept and proceed via R 301 SEL to CAVOI. Hold as published.

NOTE
1. Missed approach turn limited to 220 kt IAS maximum.

RECOMMENDED PROFILE	DME ISEL	4	3	2
Final Approach Gradient 5.24%, 318 ft/NM	ALT(HGT)	1 305 (1 267)	986 (948)	670 (632)

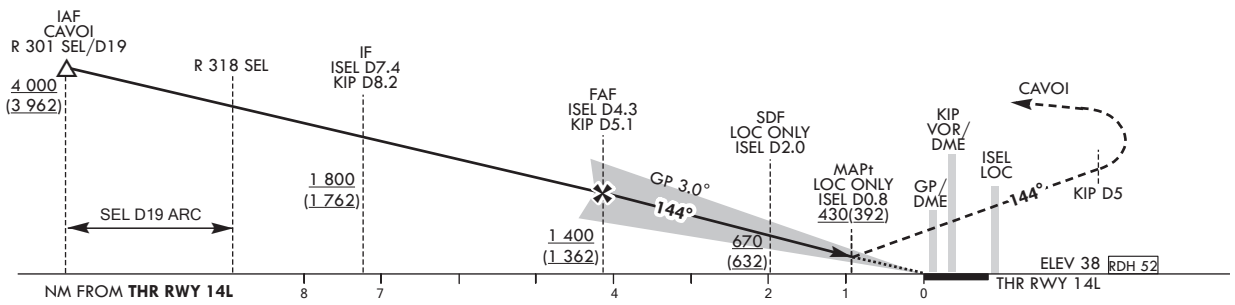

OCA (H)		A	B	C	D
Straight-in Approach	CAT-I	238 (200)			
	LOC	430 (392)			

	Knots	60	90	120	150	180
Rate of descent	V/V fpm	318	478	637	796	955

* Timing Not authorized for defining MAPt.
* Circling Not authorized.

Change : Amended missed approach procedure.

SEOUL/Gimpo Intl(RKSS)
ILS Y or LOC Y RWY 14L

AERONAUTICAL DATA TABULATION

ILS/LOC Y Approach to RWY 14L from CAVOI			
Fix / Point		Coordinates	
CAVOI(IAF)	R 301 SEL/19.00 NM SEL	37°32'02.0"N	126°33'37.0"E
D7.4 ISEL(IF)	BRG 143.54°/7.40 NM ISEL	37°39'20.6"N	126°40'16.7"E
D4.3 ISEL(FAF)	BRG 143.54°/4.30 NM ISEL	37°37'07.1"N	126°43'04.8"E
D2.0 ISEL (SDF LOC ONLY)	BRG 143.54°/2.00 NM ISEL	37°35'32.2"N	126°45'04.3"E
D0.8 ISEL (MAPt LOC ONLY)	BRG 143.54°/0.80 NM ISEL	37°34'41.1"N	126°46'08.4"E
THR RWY 14L		37°34'14.55"N	126°46'41.80"E
ISEL DME		37°34'03.8"N	126°46'48.1"E
KIP VOR/DME		37°33'27.1"N	126°47'31.3"E
D5 KIP	HDG 144	37°29'58.1"N	126°52'02.1"E
CAVOI	R 301 SEL/19.00 NM	37°32'02.0"N	126°33'37.0"E

INSTRUMENT APPROACH CHART-ICAO

Note : Approach under ICAO Flight Procedures.

AERODROME ELEV 59 ft
HEIGHTS RELATED TO
THR RWY 14L - ELEV **38** ft

SEOUL APP	119.75
	119.1
GIMPO TWR	118.1
	118.05

SEOUL/Gimpo Intl(RKSS)

RNP RWY 14L

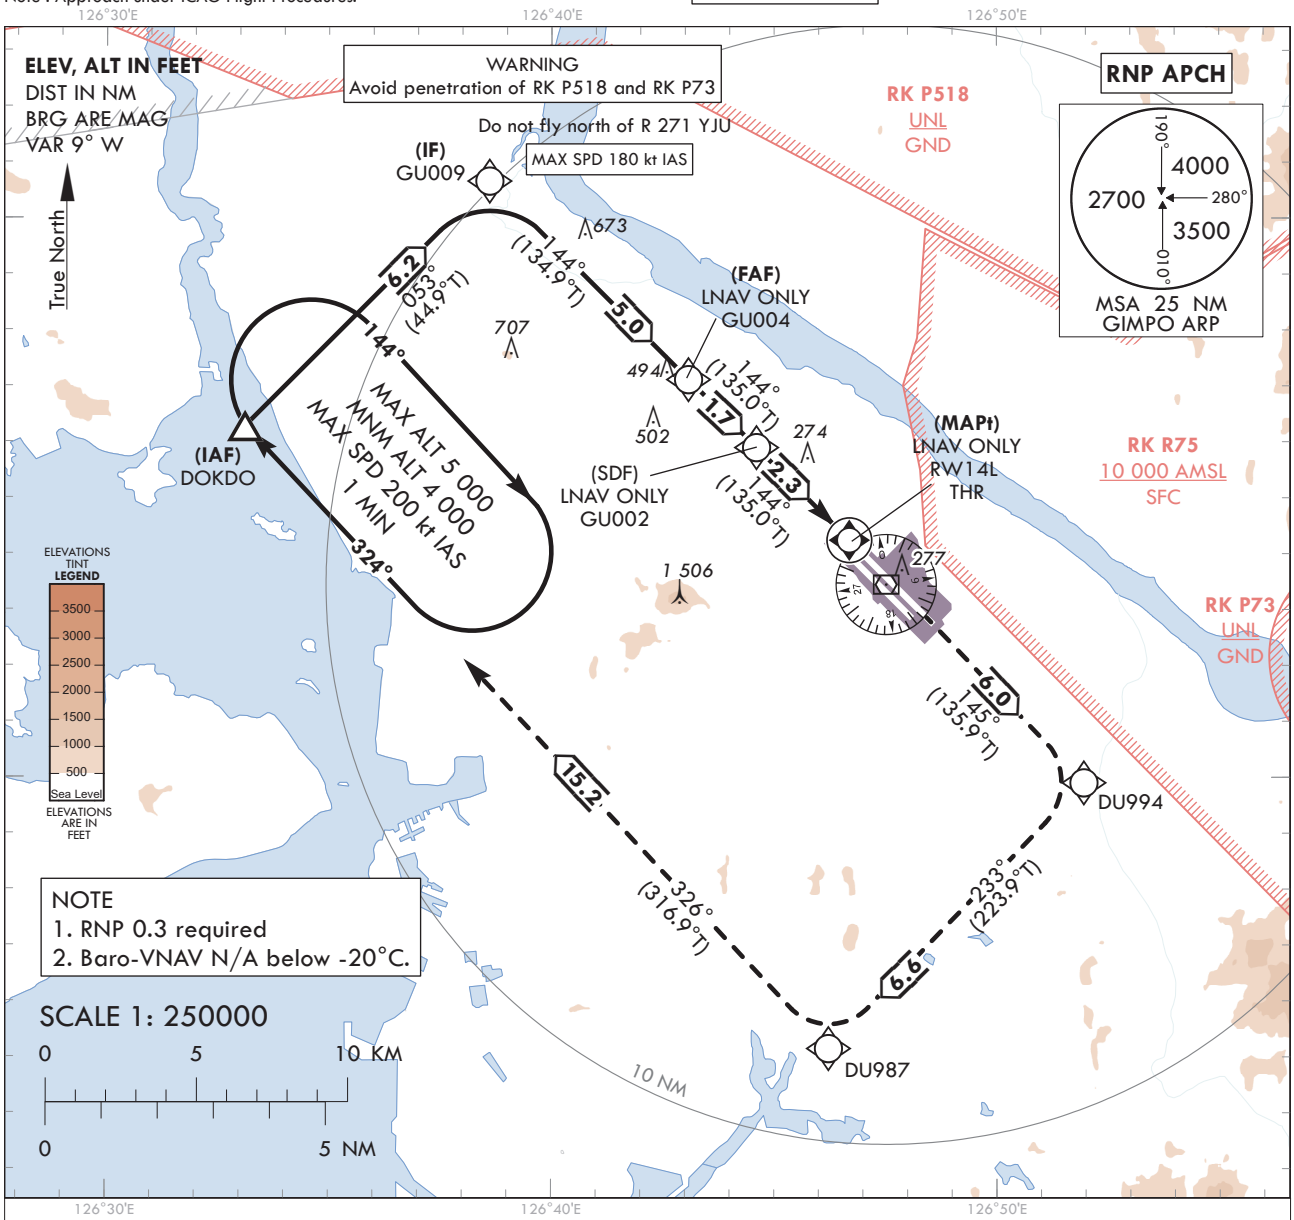

TRANSITION ALT 14 000
TRANSITION LVL FL 140

MISSED APPROACH
Climb to 4 000 ft. Track to DU994, DU987 and DOKDO. Hold as pushlished.

NOTE
1.Missed approach turn limited to 220 kt IAS maximum.

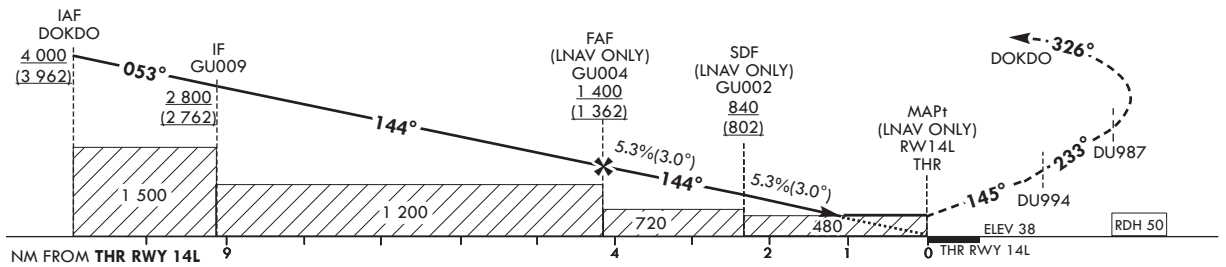

OCA (H)		A	B	C	D		Knots	60	90	120	150	180
Straight-in Approach	LNAV/VNAV	450 (412)				Rate of descent	V/V fpm	318	478	637	796	955
	LNAV	480 (442)				*Timing Not authorized for defining MAPt. *Circling Not authorized.						

Change : Information of landing minima(OCA(H)).

Instrument Approach Procedure Coding Tables

RNP RWY 14L

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ TCH	Navigation specification	Remarks
001	IF	DOKDO	-	-	-	-	+4 000	-	37°36'17.1"N 126°33'07.1"E	-	RNP APCH	IAF
002	TF	GU009	-	053 (044.9)	6.2	-	+2 800	-180	37°40'40.0"N 126°38'36.6"E	-	RNP APCH	IF
003	TF	GU004	-	144 (134.9)	5.0	-	+1 400	-	37°37'07.1"N 126°43'04.8"E	-	RNP APCH	FAF
004	TF	GU002	-	144 (135.0)	1.7	-	+840	-	37°35'54.2"N 126°44'36.6"E	-	RNP APCH	SDF
005	TF	RW14L	Y	144 (135.0)	2.3	-	+480	-	37°34'14.55"N 126°46'41.80"E	-3.01/50	RNP APCH	MAPt
006	TF	DU994	-	145 (135.9)	6.0	-	-	-	37°29'54.5"N 126°51'57.6"E	-	RNP APCH	-
007	TF	DU987	-	233 (223.9)	6.6	-	-	-220	37°25'09.3"N 126°46'13.6"E	-	RNP APCH	-
008	TF	DOKDO	Y	326 (316.9)	15.2	-	+4 000	-220	37°36'17.1"N 126°33'07.1"E	-	RNP APCH	-
009	HM	DOKDO	Y	324 (314.9)	-	R	-5 000 +4 000	-200	37°36'17.1"N 126°33'07.1"E	-	RNP APCH	1 min (Outbound timing)

INSTRUMENT APPROACH CHART-ICAO

Note : Approach under ICAO Flight Procedures.

AERODROME ELEV 59 ft
HEIGHTS RELATED TO
THR RWY 14R - ELEV **34** ft

SEOUL APP	119.75
	119.1
GIMPO TWR	118.1
	118.05

SEOUL/Gimpo Intl(RKSS)

ILS or LOC RWY 14R
CAT II & III

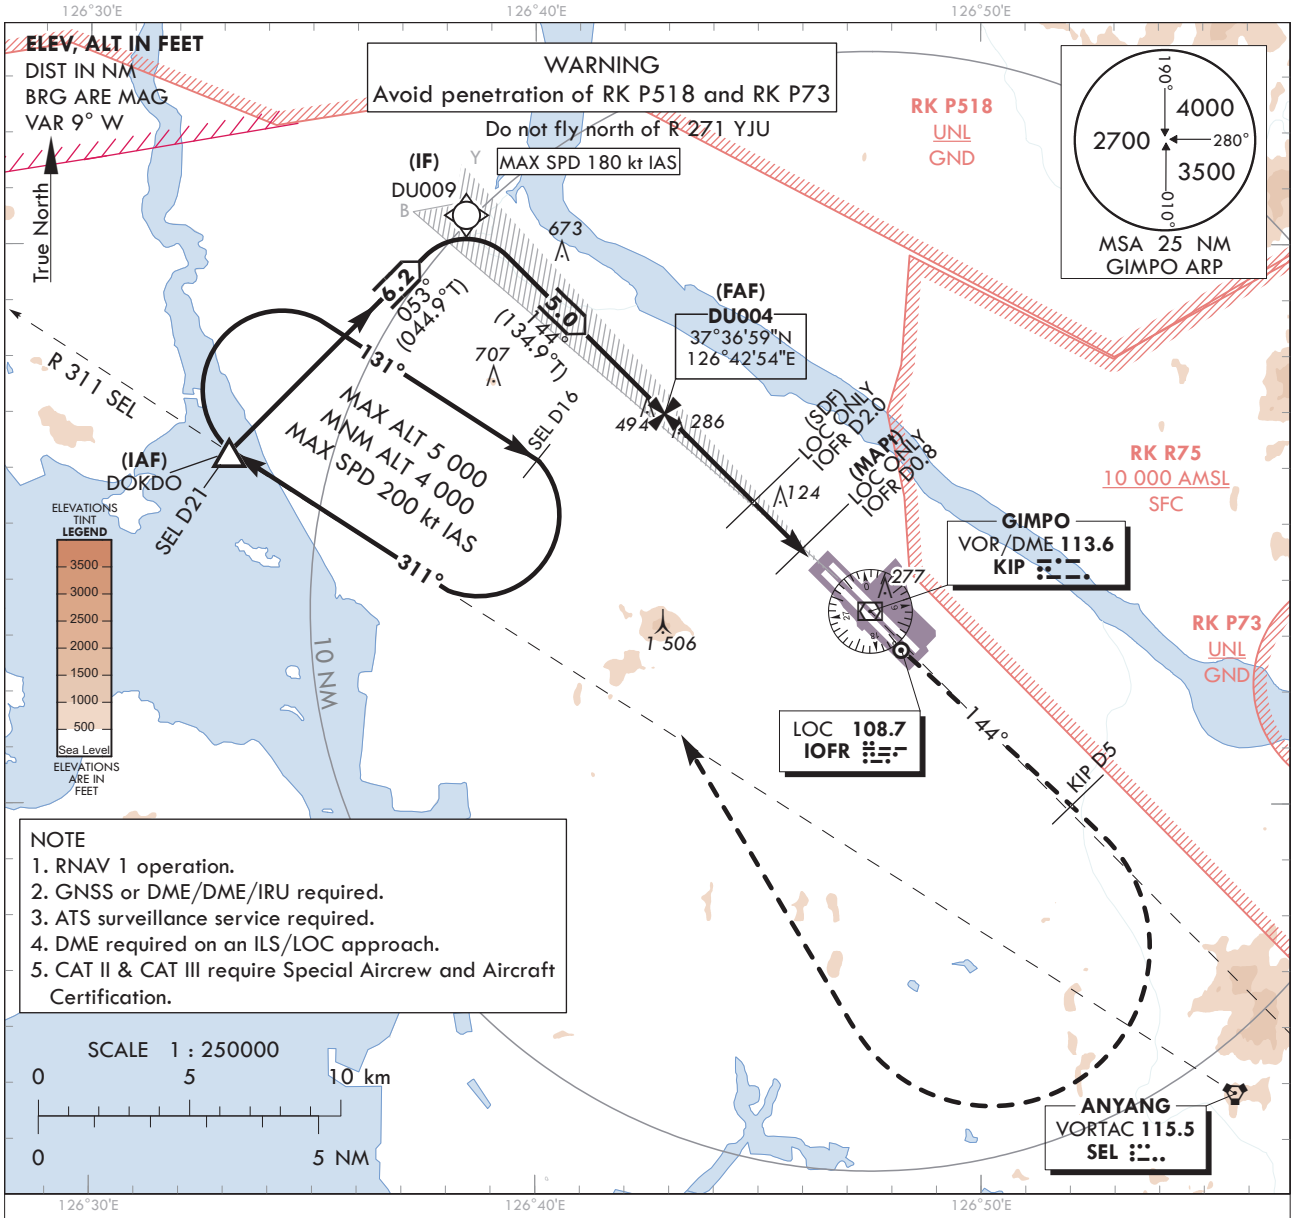

NOTE
1. RNAV 1 operation.
2. GNSS or DME/DME/IRU required.
3. ATS surveillance service required.
4. DME required on an ILS/LOC approach.
5. CAT II & CAT III require Special Aircrew and Aircraft Certification.

RECOMMENDED PROFILE	DME IOFR	4	3	2
Final Approach Gradient 5.36%, 325 ft/NM	ALT(HGT)	1 335 (1 301)	1 009 (975)	684 (650)

TRANSITION ALT 14 000
TRANSITION LVL FL 140

MISSED APPROACH
Climb to 4 000 ft on HDG 144° to KIP D5
then turn right to intercept and proceed via R 311 SEL
to DOKDO. Hold as published.

NOTE
1. Missed approach turn limited to 220 kt IAS maximum.

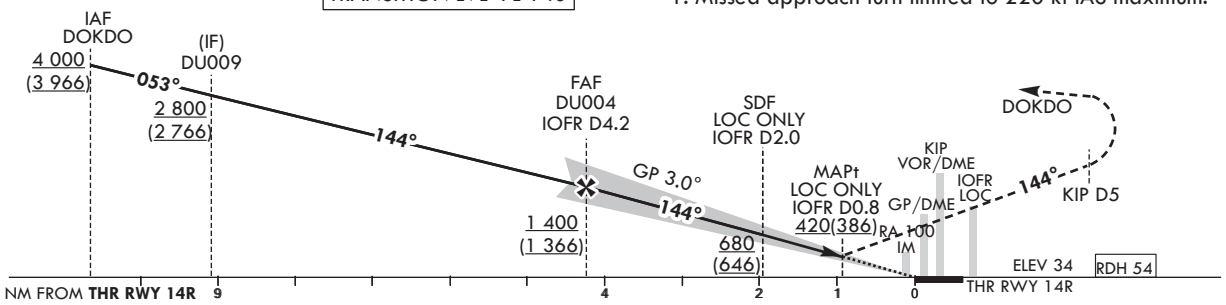

OCA (H)		A	B	C	D
Straight-in Approach	CAT-I	234 (200)			
	LOC	420 (386)			
	CAT II	134 (100)			
	CAT III	-			

Rate of descent	Knots	60	90	120	150	180
	V/V fpm	318	478	637	796	955

* Timing Not authorized for defining MAPt.
* Circling Not authorized.

Change : Establishment of rate of descent and Amended recommended profile.

SEOUL/Gimpo Intl(RKSS)
ILS or LOC RWY 14R
CAT II & III

AERONAUTICAL DATA TABULATION

ILS/LOC Approach to RWY 14R from DOKDO			
Fix / Point		Coordinates	
DOKDO(IAF)		37°36'17.1"N	126°33'07.1"E
DU009(IF)	BRG 53.48°/6.00 NM	37°40'31.8"N	126°38'26.2"E
DU004(FAF)	BRG 143.53°/4.20 NM IOFR	37°36'59.0"N	126°42'54.3"E
D2.0 IOFR (SDF LOC ONLY)	BRG 143.53°/2.00 NM IOFR	37°35'23.9"N	126°44'53.9"E
D0.8 IOFR (MAPt LOC ONLY)	BRG 143.53°/0.80 NM IOFR	37°34'32.9"N	126°45'58.1"E
THR RWY 14R		37°34'06.19"N	126°46'31.60"E
IOFR DME		37°34'01.9"N	126°46'44.2"E
KIP VOR/DME		37°33'27.1"N	126°47'31.3"E
D5 KIP	HDG 144	37°29'50.7"N	126°51'52.7"E
DOKDO	R 311 SEL/21.00 NM	37°36'17.1"N	126°33'07.1"E

INSTRUMENT APPROACH CHART-ICAO

Note : Approach under ICAO Flight Procedures.

AERODROME ELEV 59 ft
HEIGHTS RELATED TO
THR RWY 14R - ELEV **34** ft

SEOUL APP	119.75
	119.1
GIMPO TWR	118.1
	118.05

SEOUL/Gimpo Intl(RKSS)

RNP RWY 14R

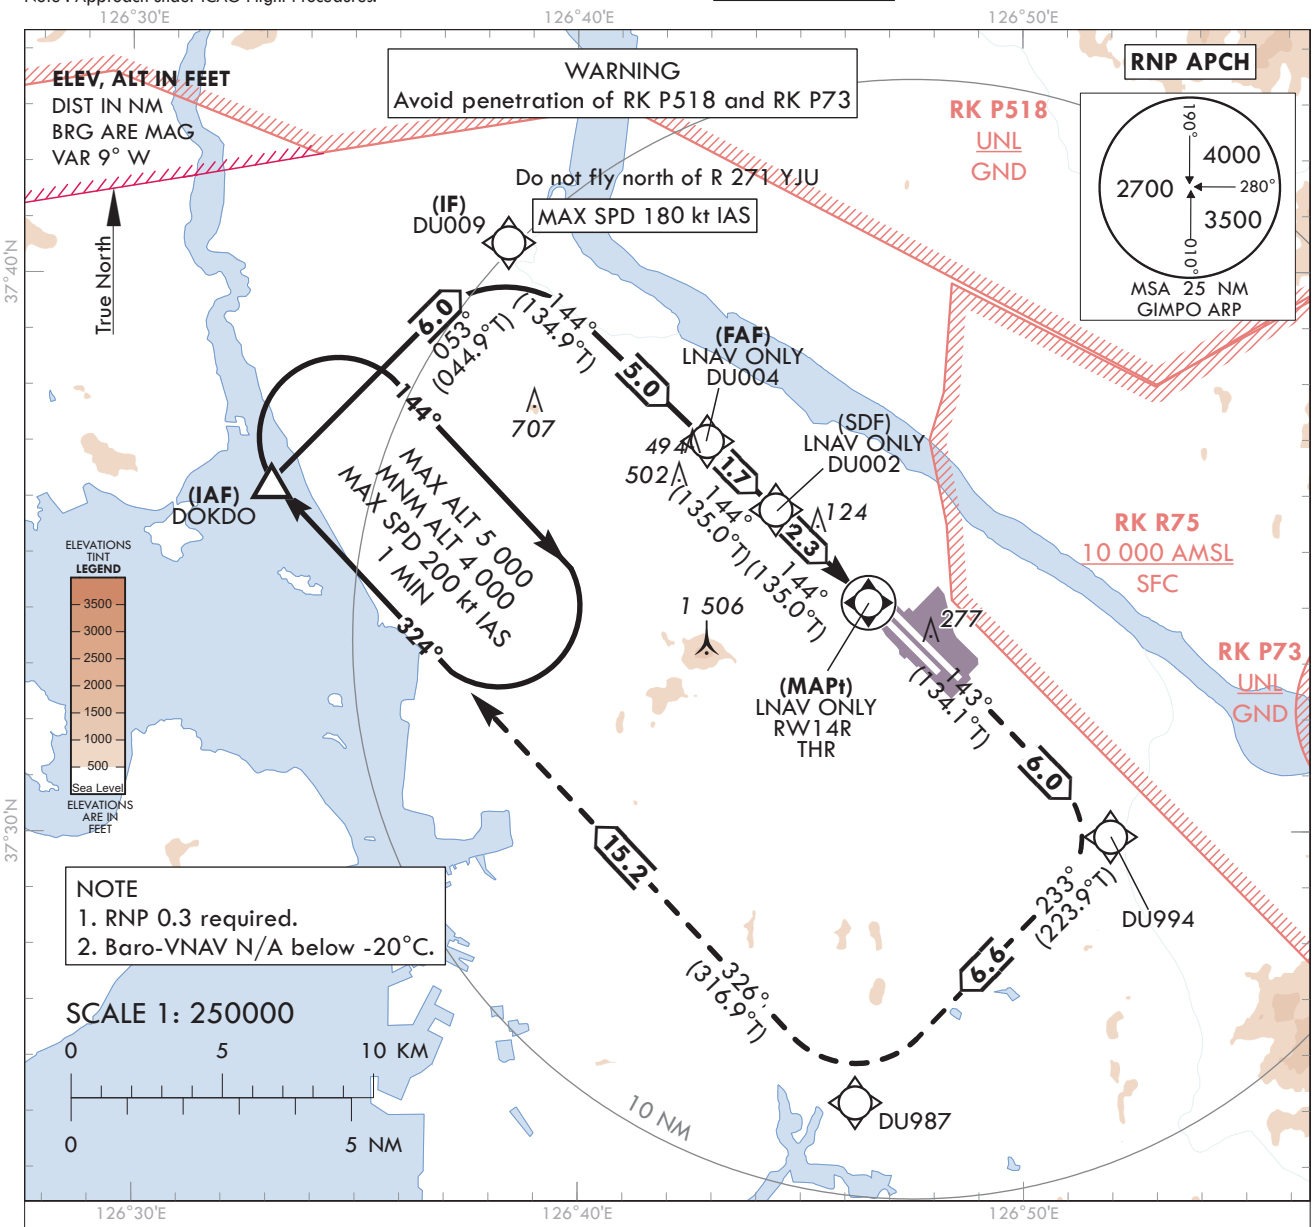

MISSED APPROACH
Climb to 4 000 ft. Track to DU994, DU987 and DOKDO. Hold as published.

TRANSITION ALT 14 000
TRANSITION LVL FL 140

NOTE
1. Missed approach turn limited to 220 kt IAS maximum.

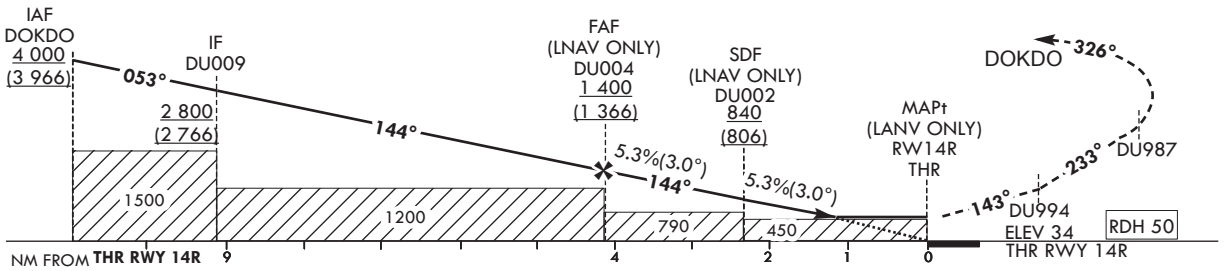

OCA (H)		A	B	C	D		Knots	60	90	120	150	180
Straight-in Approach	LNAV/VNAV	450 (416)				Rate of descent	V/V fpm	318	478	637	796	955
	LNAV	450 (416)				* Timing Not authorized for defining MAPt. * Circling Not authorized.						

Change : Information of landing minima(OCA(H)).

Instrument Approach Procedure Coding Tables

RNP RWY 14R

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ TCH	Navigation specification	Remarks
001	IF	DOKDO	-	-	-	-	+4 000	-	37°36'17.1"N 126°33'07.1"E	-	RNP APCH	IAF
002	TF	DU009	-	053 (044.9)	6.0	-	+2 800	-180	37°40'31.8"N 126°38'26.2"E	-	RNP APCH	IF
003	TF	DU004	-	144 (134.9)	5.0	-	+1 400	-	37°36'59.0"N 126°42'54.3"E	-	RNP APCH	FAF
004	TF	DU002	-	144 (135.0)	1.7	-	+840	-	37°35'45.6"N 126°44'26.6"E	-	RNP APCH	SDF
005	TF	RW14R	Y	144 (135.0)	2.3	-	+450	-	37°34'06.19"N 126°46'31.60"E	-3.01/50	RNP APCH	MAPt
006	TF	DU994	-	143 (134.1)	6.0	-	-	-	37°29'54.5"N 126°51'57.6"E	-	RNP APCH	-
007	TF	DU987	-	233 (223.9)	6.6	-	-	-220	37°25'09.3"N 126°46'13.6"E	-	RNP APCH	-
008	TF	DOKDO	Y	326 (316.9)	15.2	-	+4 000	-220	37°36'17.1"N 126°33'07.1"E	-	RNP APCH	-
009	HM	DOKDO	Y	324 (314.9)	-	R	-5 000 +4 000	-200	37°36'17.1"N 126°33'07.1"E	-	RNP APCH	1 min (Outbound timing)

INSTRUMENT APPROACH CHART - ICAO

Note : Approach under ICAO Flight Procedures.

AERODROME ELEV 59 ft
HEIGHTS RELATED TO
THR RWY 32L - ELEV **41** ft

SEOUL APP	119.75 119.1
GIMPO TWR	118.1 118.05

SEOUL/Gimpo Intl(RKSS)

ILS or LOC RWY 32L

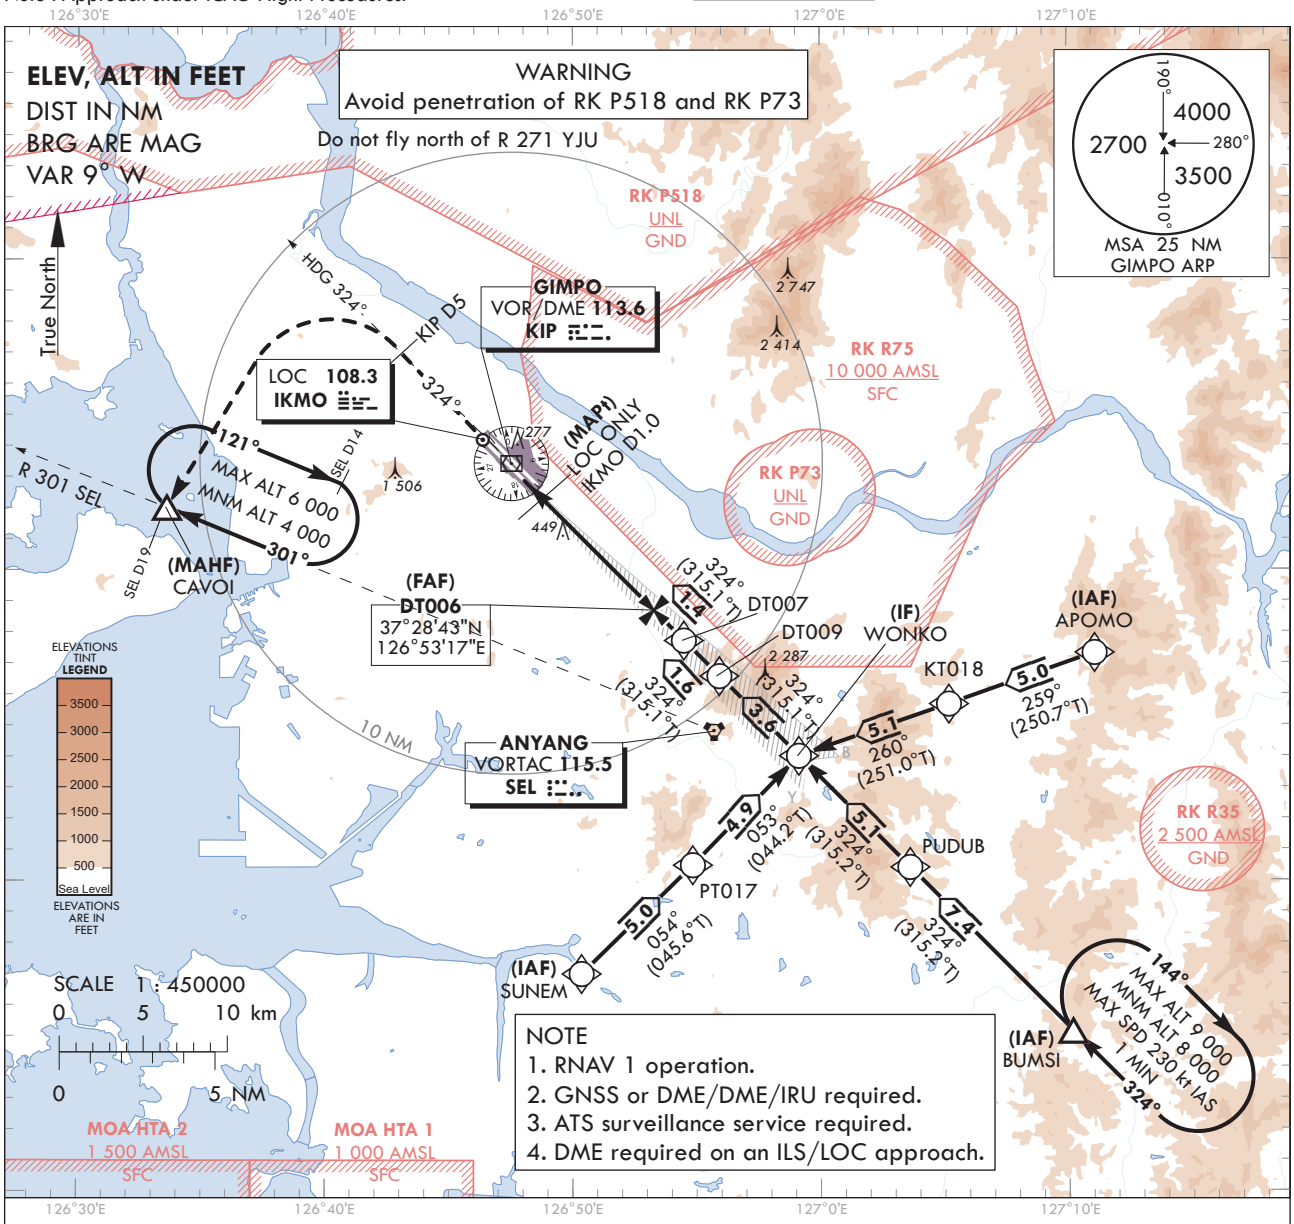

RECOMMENDED PROFILE	DME IKMO	6	5	4	3
Final Approach Gradient 5.29%, 321 ft/NM	ALT(HGT)	1 968 (1 927)	1 647 (1 606)	1 325 (1 284)	1 004 (963)

TRANSITION ALT 14 000
TRANSITION LVL FL 140

MISSED APPROACH
After 500 ft, Climb on HDG 324° to KIP D5.
Continue climb to 4 000 ft.
Turn left direct to CAVOI. Hold as published.

NOTE
1. Missed approach turn limited to 220 kt IAS maximum.

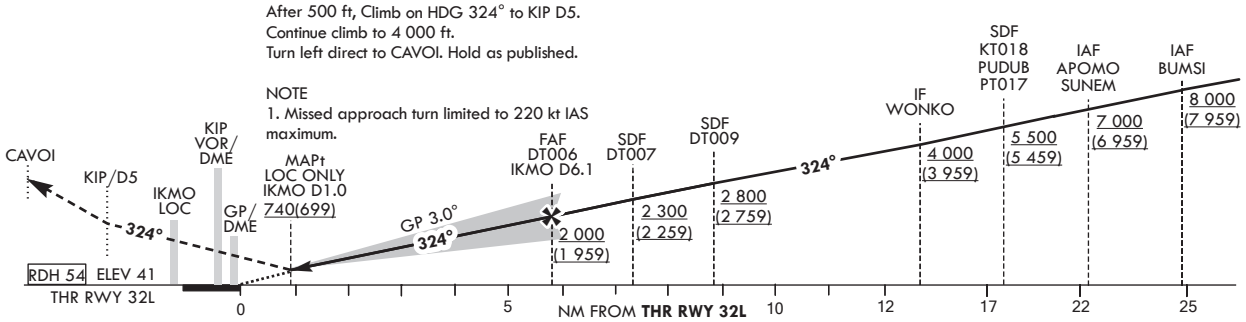

OCA (H)		A	B	C	D
Straight-in Approach	CAT-I	241 (200)			
	LOC	740 (699)			

	Knots	60	90	120	150	180
Rate of descent	V/V fpm	318	478	637	796	955

*Timing Not authorized for defining MAPt.
*Circling Not authorized.

Change : Amended missed approach procedure.

SEOUL/Gimpo Intl(RKSS)
ILS or LOC RWY 32L

AERONAUTICAL DATA TABULATION

ILS/LOC Approach to RWY 32L from APOMO(IAF) to WONKO(IF)		
Fix / Point		Coordinates
APOMO(IAF)		37°27'20.9"N 127°11'04.4"E
KT018(SDF)	BRG 259.29°/5.00 NM	37°25'41.9"N 127°05'11.1"E
WONKO(IF)	BRG 259.60°/5.10 NM	37°24'02.0"N 126°59'08.0"E
ILS/LOC Approach to RWY 32L from BUMSI to WONKO(IF)		
Fix / Point		Coordinates
BUMSI(IAF)		37°15'10.2"N 127°10'09.6"E
PUDUB(SDF)	BRG 323.86°/7.42 NM	37°20'26.5"N 127°03'36.6"E
WONKO(IF)	BRG 323.79°/5.06 NM	37°24'02.0"N 126°59'08.0"E
ILS/LOC Approach to RWY 32L from SUNEM(IAF) to WONKO(IF)		
Fix / Point		Coordinates
SUNEM(IAF)		37°17'00.6"N 126°50'21.9"E
PT017(SDF)	BRG 54.22°/5.00 NM	37°20'30.7"N 126°54'50.7"E
WONKO(IF)	BRG 52.77°/4.90 NM	37°24'02.0"N 126°59'08.0"E
ILS/LOC Approach to RWY 32L from WONKO(IF) to MAHF		
Fix / Point		Coordinates
DT009(SDF)	BRG 323.72°/9.10 NM IKMO	37°26'36.1"N 126°55'55.6"E
DT007(SDF)	BRG 323.72°/7.50 NM IKMO	37°27'44.9"N 126°54'29.5"E
DT006(FAF)	BRG 323.72°/6.10 NM IKMO	37°28'42.9"N 126°53'17.0"E
D1.0 IKMO (MAPt LOC ONLY)	BRG 323.72°/1.00 NM IKMO	37°32'17.6"N 126°48'48.0"E
THR RWY 32L		37°32'52.83"N 126°48'03.71"E
IKMO DME		37°32'57.4"N 126°47'51.3"E
KIP VOR/DME		37°33'27.1"N 126°47'31.3"E
Climb to 500 ft	HDG 324	-
D5 KIP	HDG 324	37°36'59.7"N 126°43'04.6"E
CAVOI	BRG 223.11°/19.00 NM SEL	37°32'02.0"N 126°33'37.0"E

INSTRUMENT APPROACH CHART-ICAO

Note : Approach under ICAO Flight Procedures.

AERODROME ELEV 59 ft
HEIGHTS RELATED TO
THR RWY 32L - ELEV **41** ft

SEOUL APP	119.75
	119.1
GIMPO TWR	118.2
	118.8

SEOUL/Gimpo Intl(RKSS)

RNP RWY 32L

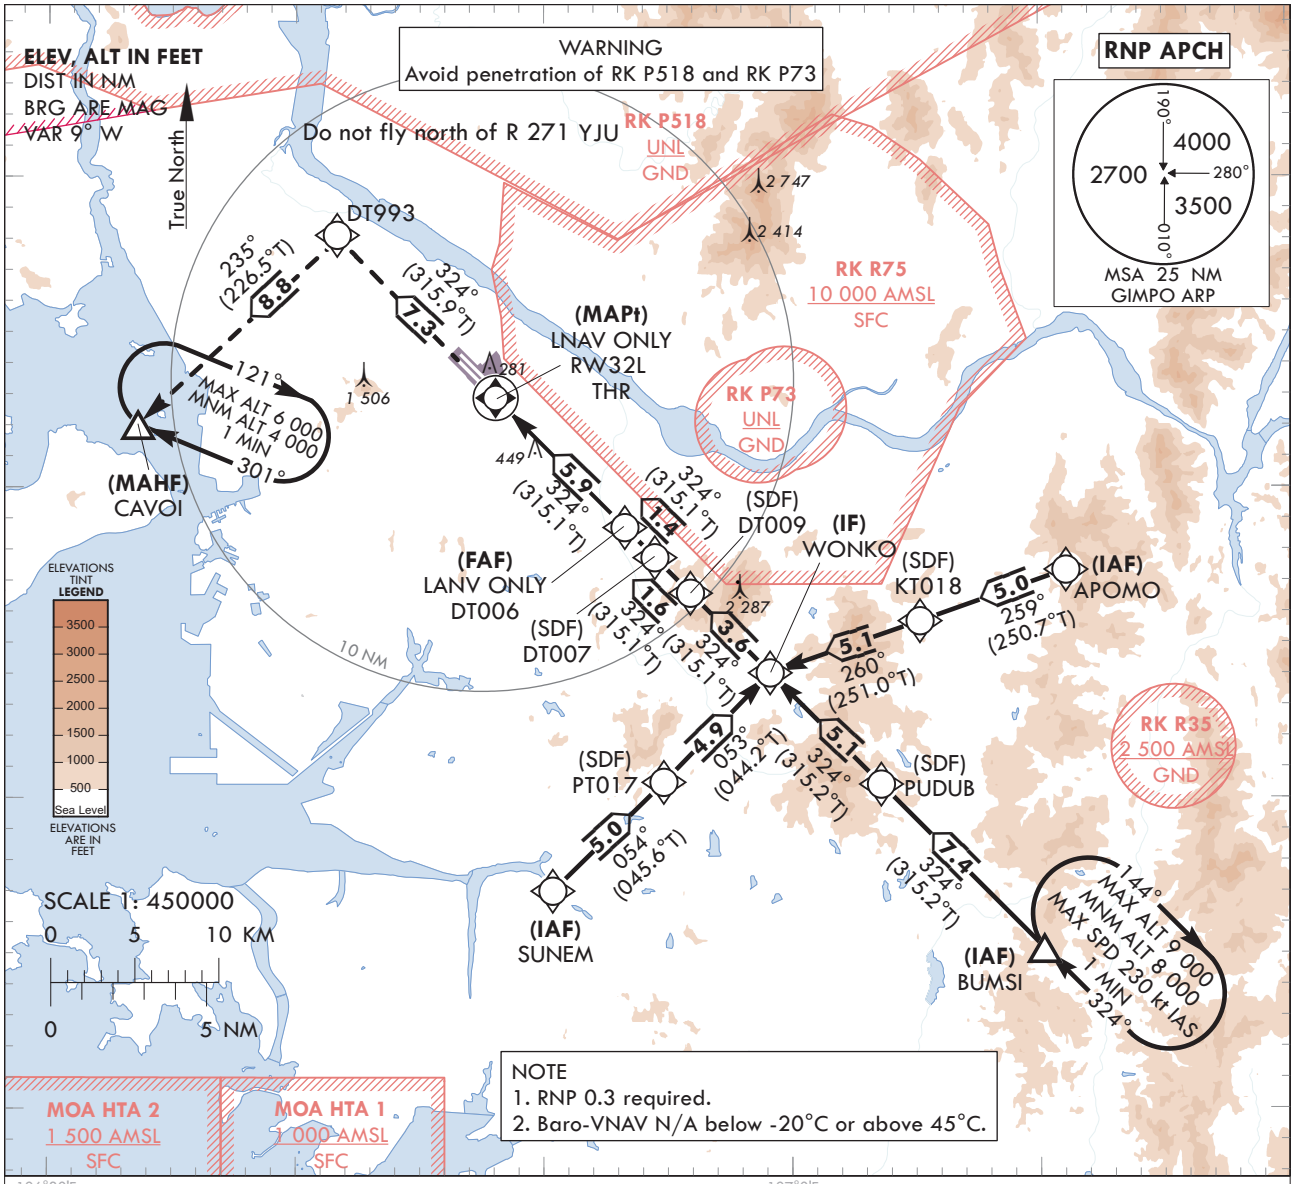

MISSED APPROACH
Climb to 4 000 ft. Track to DT993 and CAVOI.
Hold as published.

TRANSITION ALT 14 000
TRANSITION LVL FL 140

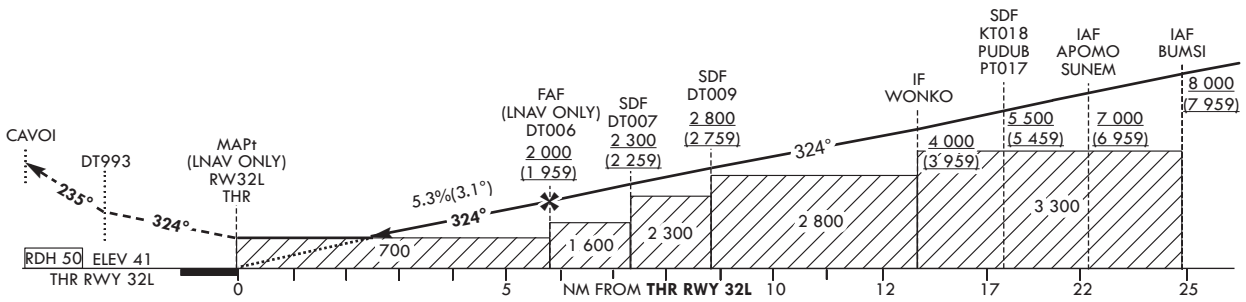

OCA (H)		A	B	C	D		Knots	60	90	120	150	180
Straight-in Approach	LNAV/VNAV	610 (569)				Rate of descent	V/V fpm	325	487	649	812	974
	LNAV	700 (659)				* Timing Not authorized for defining MAPt. * Circling Not authorized.						

Change : Amended chart symbol.

Instrument Approach Procedure Coding Tables

RNP RWY 32L - via APOMO to WONKO(IF)

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	APOMO	-	-	-	-	+7 000	-	37°27'20.9"N 127°11'04.4"E	-	RNP APCH	IAF
002	TF	KT018	-	259 (250.7)	5.0	-	+5 500	-	37°25'41.9"N 127°05'11.1"E	-	RNP APCH	SDF
003	TF	WONKO	-	260 (251.0)	5.1	-	+4 000	-	37°24'02.0"N 126°59'08.0"E	-	RNP APCH	IF

RNP RWY 32L - via BUMSI to WONKO(IF)

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	BUMSI	-	-	-	-	+8 000	-	37°15'10.2"N 127°10'09.6"E	-	RNP APCH	IAF
002	TF	PUDUB	-	324 (315.2)	7.4	-	+5 500	-	37°20'26.5"N 127°03'36.6"E	-	RNP APCH	SDF
003	TF	WONKO	-	324 (315.2)	5.1	-	+4 000	-	37°24'02.0"N 126°59'08.0"E	-	RNP APCH	IF

RNP RWY 32L - via SUNEM to WONKO(IF)

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	SUNEM	-	-	-	-	+7 000	-	37°17'00.6"N 126°50'21.9"E	-	RNP APCH	IAF
002	TF	PT017	-	054 (045.6)	5.0	-	+5 500	-	37°20'30.7"N 126°54'50.7"E	-	RNP APCH	SDF
003	TF	WONKO	-	053 (044.2)	4.9	-	+4 000	-	37°24'02.0"N 126°59'08.0"E	-	RNP APCH	IF

RNP RWY 32L - via WONKO(IF) to MAHF

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
003	TF	WONKO	-	-	-	-	+4 000	-	37°24'02.0"N 126°59'08.0"E	-	RNP APCH	IF
004	TF	DT009	-	324 (315.1)	3.6	-	+2 800	-	37°26'36.1"N 126°55'55.6"E	-	RNP APCH	SDF
005	TF	DT007	-	324 (315.1)	1.6	-	+2 300	-	37°27'44.9"N 126°54'29.5"E	-	RNP APCH	SDF
006	TF	DT006	-	324 (315.1)	1.4	-	+2 000	-	37°28'42.9"N 126°53'17.0"E	-	RNP APCH	FAF
007	TF	RW32L	Y	324 (315.1)	5.9	-	+700	-	37°32'52.83"N 126°48'03.71"E	-3.06/50	RNP APCH	MAPt
008	TF	DT993	-	324 (315.9)	7.3	-	-	-	37°38'07.5"N 126°41'39.6"E	-	RNP APCH	-
009	TF	CAVOI	Y	235 (226.5)	8.8	-	+4 000	-	37°32'02.0"N 126°33'37.0"E	-	RNP APCH	-

HOLDING PROCEDURE

Holding Identification	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Time (min)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
RNP RWY 32L	HM	BUMSI	Y	324 (315.2)	1	R	-9 000 +8 000	-230	37°15'10.2"N 127°10'09.6"E	-	RNAV 1	-
	HM	CAVOI	Y	301 (292.2)	1	R	-6 000 +4 000	-	37°32'02.0"N 126°33'37.0"E	-	RNAV 1	-

INSTRUMENT APPROACH CHART-ICAO

Note : Approach under ICAO Flight Procedures.

AERODROME ELEV 59 ft
HEIGHTS RELATED TO
THR RWY 32L - ELEV **41** ft

SEOUL APP	119.75
	119.1
GIMPO TWR	118.1
	118.05

SEOUL/Gimpo Intl(RKSS)

VOR RWY 32L

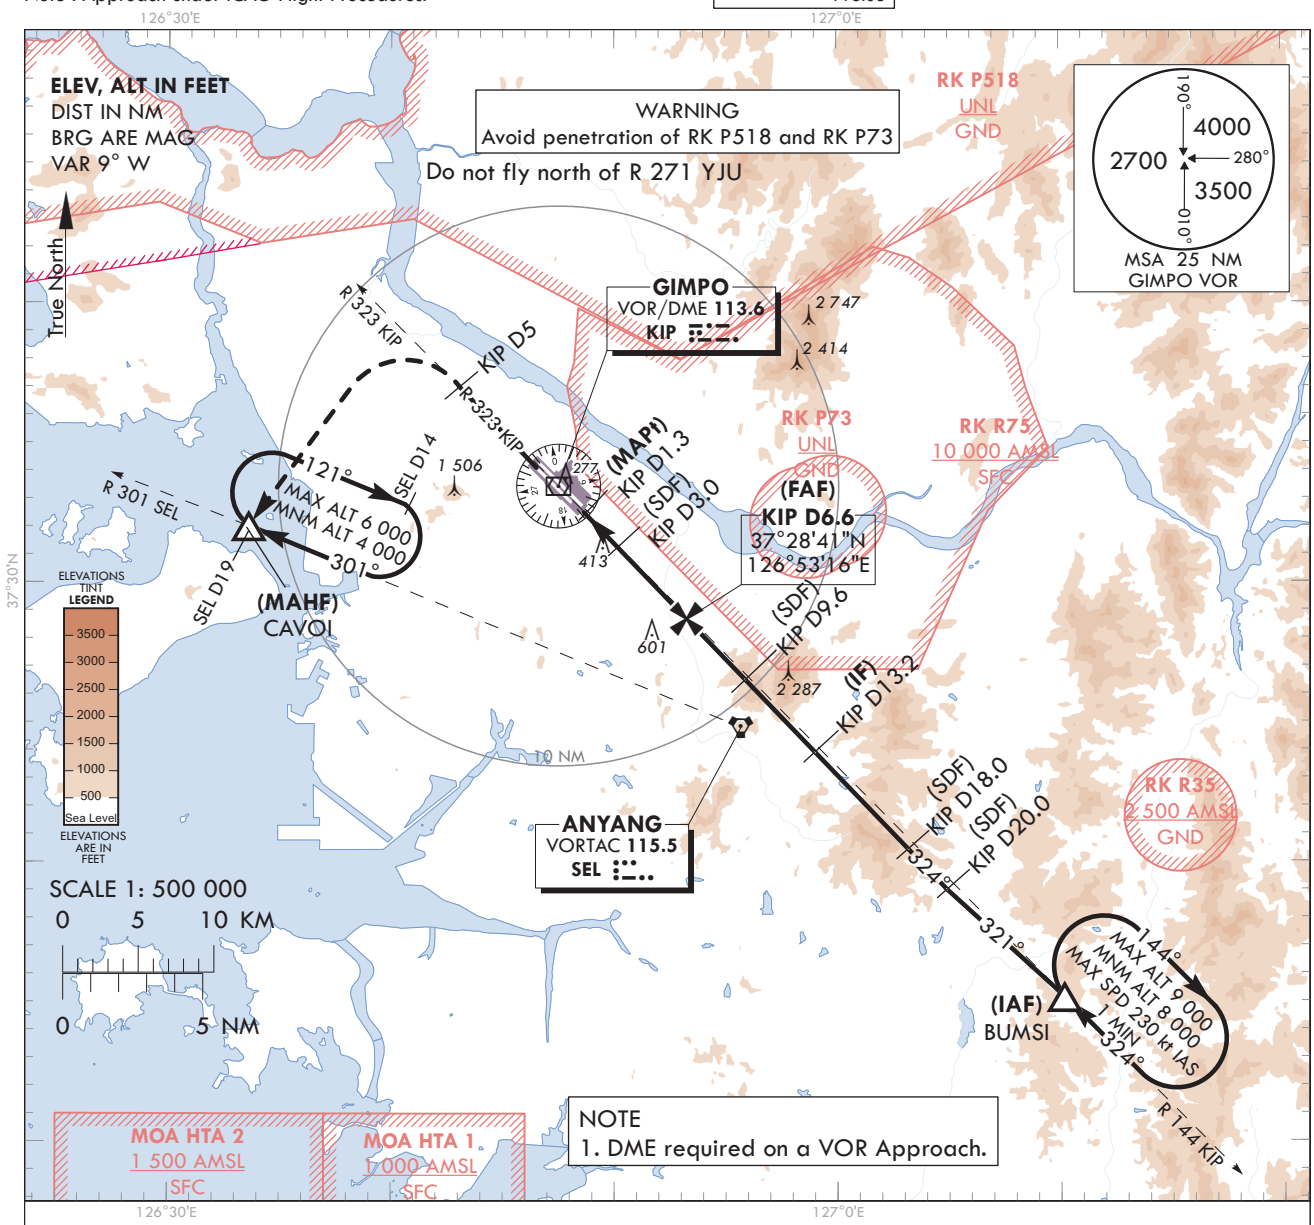

RECOMMENDED PROFILE	DME KIP	6	5	4	3
Final Gradient 5.2%(316.7 ft/NM)to SDF,5.5%(335.7 ft/NM) to THR	ALT(HGT)	1 810(1 769)	1 493(1 452)	1 177(1 136)	860(819)

MISSED APPROACH
Climb to 4 000 ft on R 323 KIP to 5 DME then turn left direct to CAVOI.
Hold as published.
NOTE
1.Missed approach turn limited to 220 kt IAS maximum.

TRANSITION ALT 14 000
TRANSITION LVL FL 140

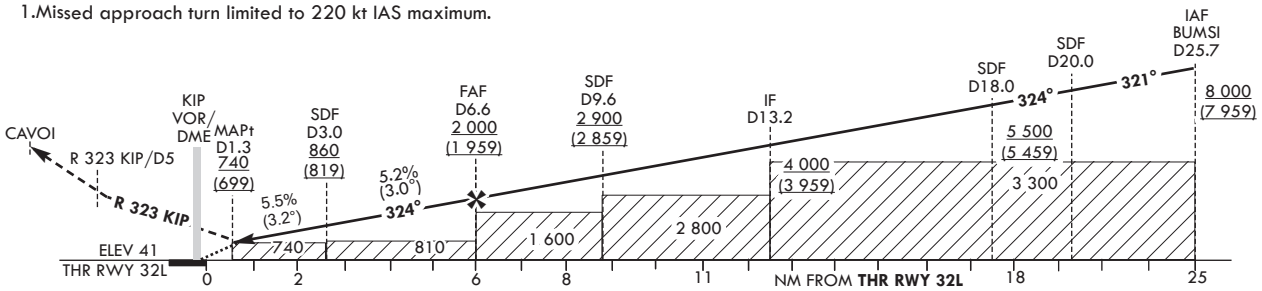

						Knots	60	90	120	150	180
OCA (H)	A	B	C	D	Rate of descent	V/V fpm	319	478	637	797	956
Straight-in Approach	740 (699)				*Timing Not authorized for defining MAPt. *Circling Not authorized.						

Change : Information of landing minima(OCA(H)).

SEOUL/Gimpo Intl(RKSS)
VOR RWY 32L

AERONAUTICAL DATA TABULATION

VOR Approach to RWY 32L from BUMSI			
Fix / Point		Coordinates	
BUMSI(IAF)		37°15'10.2"N	127°10'09.6"E
D20 KIP(SDF)	BRG 320.65°/5.68 NM	37°19'00.4"N	127°04'54.7"E
D18 KIP(SDF)	BRG 324.48°/18.00 NM KIP	37°20'27.2"N	127°03'10.7"E
D13.2 KIP(IF)	BRG 324.48°/13.20 NM KIP	37°23'55.4"N	126°59'00.7"E
D9.6 KIP(SDF)	BRG 324.48°/9.60 NM KIP	37°26'31.4"N	126°55'52.9"E
D6.6 KIP(FAF)	BRG 324.48°/6.60 NM KIP	37°28'41.4"N	126°53'16.3"E
D3.0 KIP(SDF)	BRG 324.48°/3.00 NM KIP	37°31'17.3"N	126°50'08.2"E
D1.3 KIP(MAPt)	BRG 324.48°/1.30 NM KIP	37°32'30.8"N	126°48'39.2"E
THR RWY 32L	Final approach descent angle 2.98°(FAF - SDF)/3.16°(SDF - THR)	37°32'52.83"N	126°48'03.71"E
KIP VOR/DME		37°33'27.1"N	126°47'31.3"E
D5 KIP	R 323 KIP/5.00 NM	37°36'59.7"N	126°43'04.6"E
CAVOI	BRG 223.11°/19.00 NM SEL	37°32'02.0"N	126°33'37.0"E

INSTRUMENT APPROACH CHART - ICAO

Note : Approach under ICAO Flight Procedures.

AERODROME ELEV 59 ft
HEIGHTS RELATED TO
THR RWY 32R - ELEV **42** ft

SEOUL APP	119.75
	119.1
GIMPO TWR	118.1
	118.05

SEOUL/Gimpo Intl(RKSS)

ILS or LOC RWY 32R

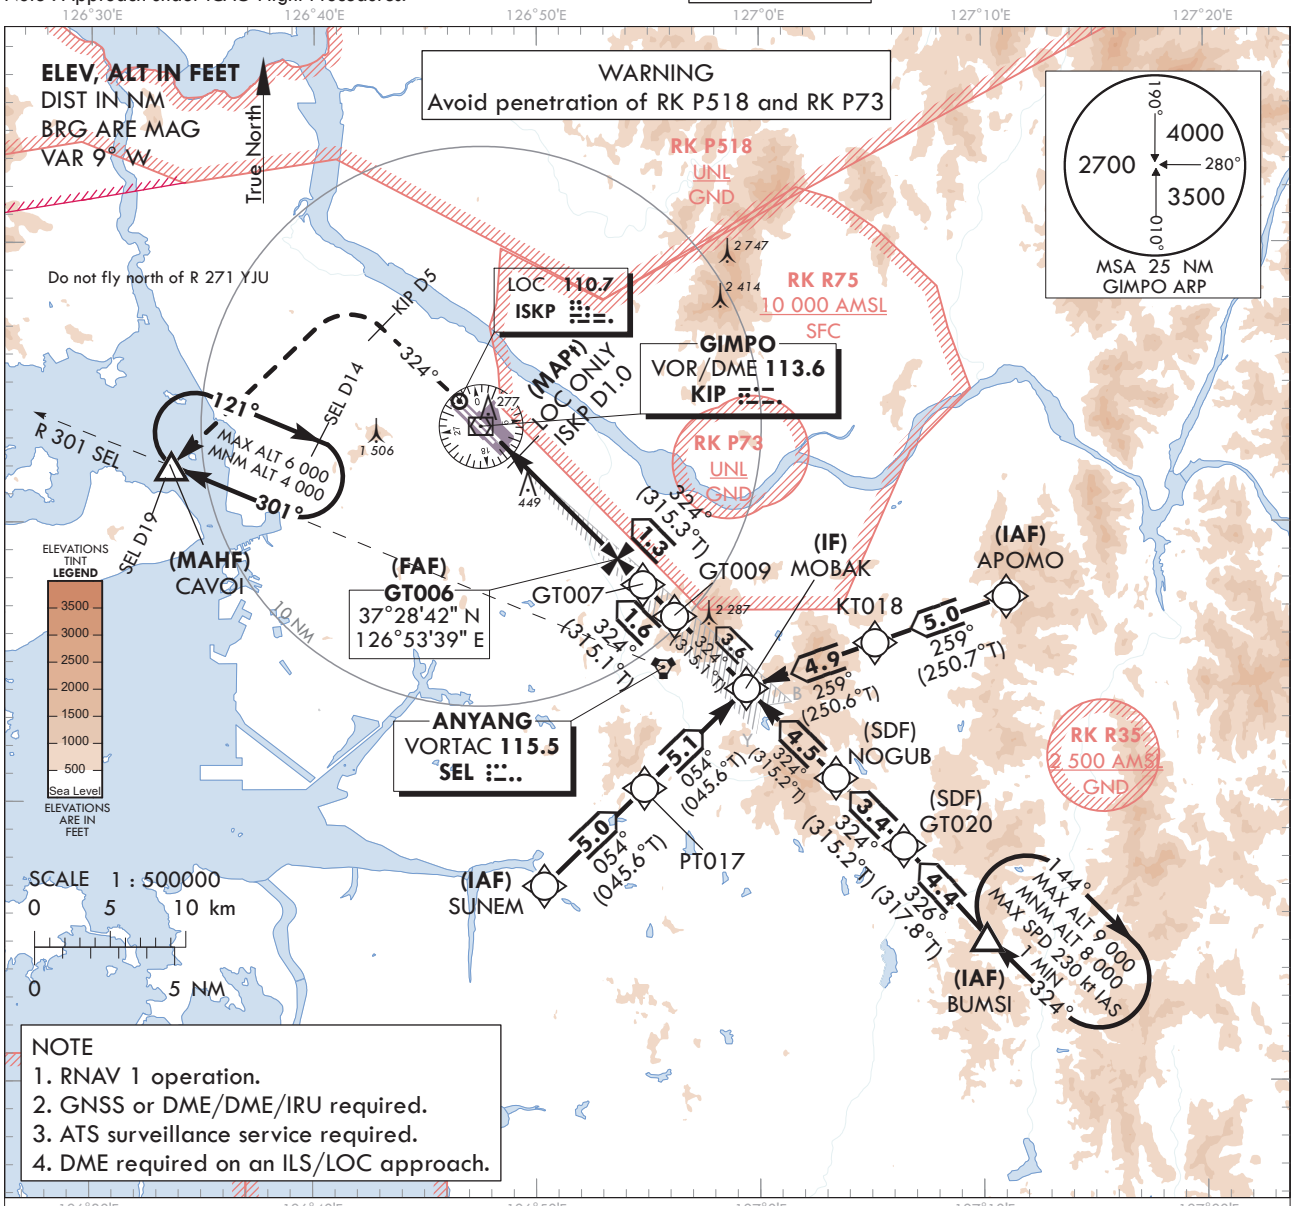

NOTE
1. RNAV 1 operation.
2. GNSS or DME/DME/IRU required.
3. ATS surveillance service required.
4. DME required on an ILS/LOC approach.

RECOMMENDED PROFILE	DME ISKP	6	5	4	3	2
Final Approach Gradient 5.28%, 321 ft/NM	ALT(HGT)	1 968 (1 926)	1 647 (1 605)	1 326 (1 284)	1 005 (963)	684 (642)

TRANSITION ALT 14 000
TRANSITION LVL FL 140

MISSED APPROACH
After 500 ft, Climb on HDG 324° to KIP D5.
Continue climb to 4 000 ft.
Turn left direct to CAVOI. Hold as published.

NOTE
1. Missed approach turn limited to 220 kt IAS maximum.

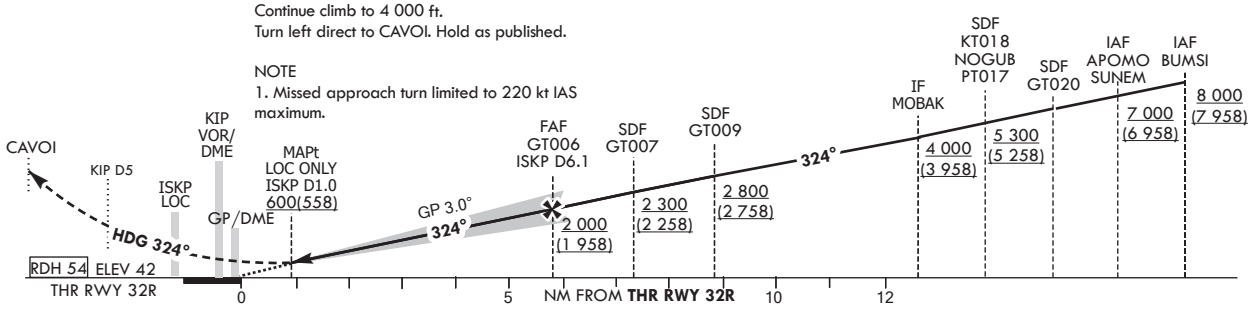

OCA (H)		A	B	C	D
Straight-in Approach	CAT-I	242 (200)			
	LOC	600 (558)			

	Knots	60	90	120	150	180
Rate of descent	V/V fpm	318	478	637	796	955

* Timing Not authorized for defining MAPt.
* Circling Not authorized.

Change : Amended missed approach procedure.

SEOUL/Gimpo Intl(RKSS)
ILS or LOC RWY 32R

AERONAUTICAL DATA TABULATION

ILS/LOC Approach to RWY 32R from APOMO(IAF) to MOBAK(IF)			
Fix / Point		Coordinates	
APOMO(IAF)		37°27'20.9"N	127°11'04.4"E
KT018(SDF)	BRG 259.29°/5.00 NM	37°25'41.9"N	127°05'11.1"E
MOBAK(IF)	BRG 259.23°/4.87 NM	37°24'04.7"N	126°59'25.2"E
ILS/LOC Approach to RWY 32R from BUMSI to MOBAK(IF)			
Fix / Point		Coordinates	
BUMSI(IAF)		37°15'10.2"N	127°10'09.6"E
GT020(SDF)	BRG 326.37°/4.40 NM	37°18'25.8"N	127°06'27.1"E
NOGUB(SDF)	BRG 323.82°/3.42 NM	37°20'51.6"N	127°03'25.8"E
MOBAK(IF)	BRG 323.79°/4.53 NM	37°24'04.7"N	126°59'25.2"E
ILS/LOC Approach to RWY 32R from SUNEM(IAF) to MOBAK(IF)			
Fix / Point		Coordinates	
SUNEM(IAF)		37°17'00.6"N	126°50'21.9"E
PT017(SDF)	BRG 54.22°/5.00 NM	37°20'30.7"N	126°54'50.7"E
MOBAK(IF)	BRG 54.26°/5.10 NM	37°24'04.7"N	126°59'25.2"E
ILS/LOC Approach to RWY 32R from MOBAK(IF) to MAHF			
Fix / Point		Coordinates	
GT009(SDF)	BRG 323.75°/9.00 NM ISKP	37°26'39.3"N	126°56'12.2"E
GT007(SDF)	BRG 323.75°/7.40 NM ISKP	37°27'47.4"N	126°54'47.0"E
GT006(FAF)	BRG 323.90°/6.10 NM ISKP	37°28'42.2"N	126°53'38.9"E
D1.0 ISKP (MAPt LOC ONLY)	BRG 323.90°/1.00 NM ISKP	37°32'16.7"N	126°49'09.7"E
THR RWY 32R		37°32'51.89"N	126°48'25.58"E
ISKP DME		37°32'56.3"N	126°48'12.9"E
KIP VOR/DME		37°33'27.1"N	126°47'31.3"E
Climb to 500 ft	HDG 324	-	
D5 KIP	HDG 324	37°36'59.7"N	126°43'04.6"E
CAVOI	BRG 222.76°/19.00 NM SEL	37°32'02.0"N	126°33'37.0"E

INSTRUMENT APPROACH CHART-ICAO

Note : Approach under ICAO Flight Procedures.

AERODROME ELEV 59 ft
HEIGHTS RELATED TO
THR RWY 32R - ELEV **42** ft

SEOUL APP	119.75
	119.1
GIMPO TWR	118.1
	118.05

SEOUL/Gimpo Intl(RKSS)

RNP RWY 32R

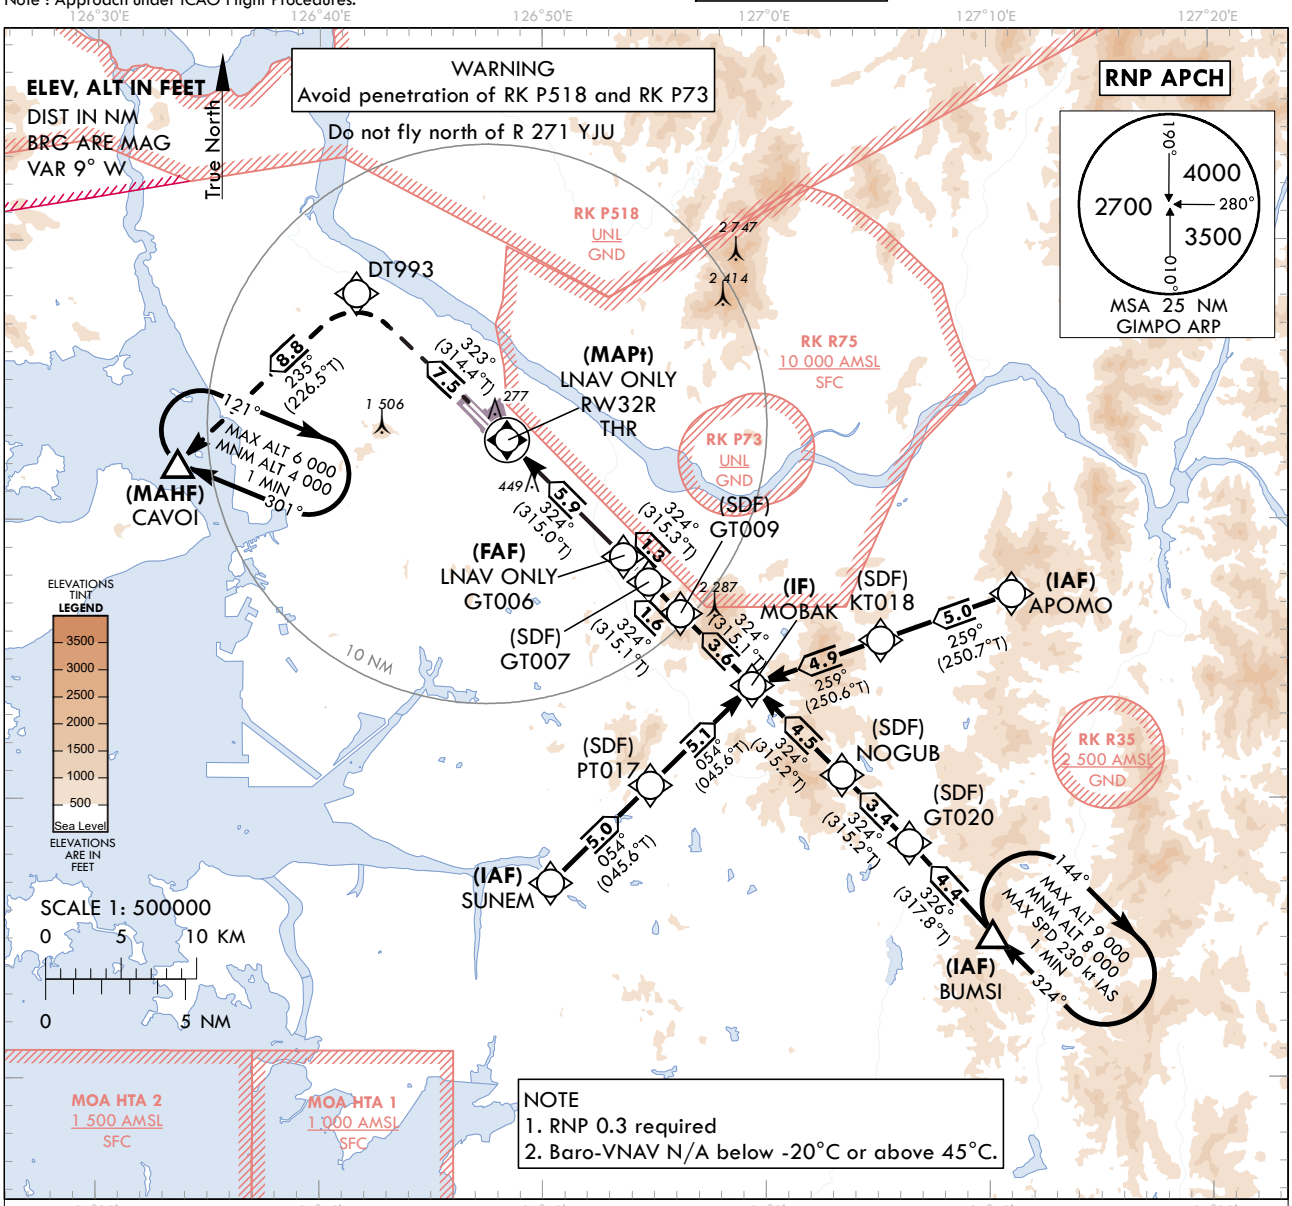

MISSED APPROACH
Climb to 4 000 ft. Track to DT993 and CAVOI.
Hold as published.

TRANSITION ALT 14 000
TRANSITION LVL FL 140

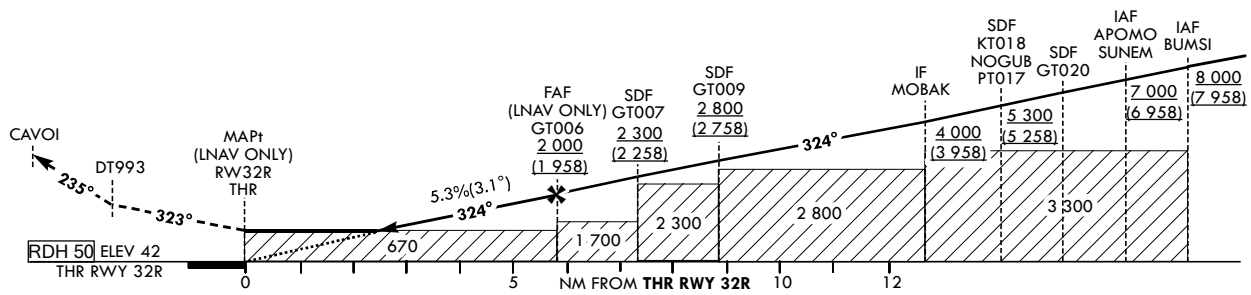

OCA (H)		A	B	C	D		Knots	60	90	120	150	180
Straight-in Approach	LNAV/VNAV	600 (558)				Rate of descent	V/V fpm	325	487	649	812	974
	LNAV	670 (628)				*Timing Not authorized for defining MAPt. *Circling Not authorized.						

Change : Information of landing minima(OCA(H)).

Instrument Approach Procedure Coding Tables

RNP RWY 32R - via APOMO to MOBAK(IF)

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	APOMO	-	-	-	-	+7 000	-	37°27'20.9"N 127°11'04.4"E	-	RNP APCH	IAF
002	TF	KT018	-	259 (250.7)	5.0	-	+5 300	-	37°25'41.9"N 127°05'11.1"E	-	RNP APCH	SDF
003	TF	MOBAK	-	259 (250.6)	4.9	-	+4 000	-	37°24'04.7"N 126°59'25.2"E	-	RNP APCH	IF

RNP RWY 32R - via BUMSI to MOBAK(IF)

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	BUMSI	-	-	-	-	+8 000	-	37°15'10.2"N 127°10'09.6"E	-	RNP APCH	IAF
002	TF	GT020	-	326 (317.8)	4.4	-	-	-	37°18'25.8"N 127°06'27.1"E	-	RNP APCH	SDF
003	TF	NOGUB	-	324 (315.2)	3.4	-	+5 300	-	37°20'51.6"N 127°03'25.8"E	-	RNP APCH	SDF
004	TF	MOBAK	-	326 (317.4)	4.9	-	+4 000	-	37°24'04.7"N 126°59'25.2"E	-	RNP APCH	IF

RNP RWY 32R - via SUNEM to MOBAK(IF)

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	SUNEM	-	-	-	-	+7 000	-	37°17'00.6"N 126°50'21.9"E	-	RNP APCH	IAF
002	TF	PT017	-	054 (045.6)	5.0	-	+5 300	-	37°20'30.7"N 126°54'50.7"E	-	RNP APCH	SDF
003	TF	MOBAK	-	054 (045.6)	5.1	-	+4 000	-	37°24'04.7"N 126°59'25.2"E	-	RNP APCH	IF

RNP RWY 32R - via MOBAK(IF) to MAHF

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
003	TF	MOBAK	-	-	-	-	+4 000	-	37°24'04.7"N 126°59'25.2"E	-	RNP APCH	IF
004	TF	GT009	-	324 (315.1)	3.6	-	+2 800	-	37°26'39.3"N 126°56'12.2"E	-	RNP APCH	SDF
005	TF	GT007	-	324 (315.1)	1.6	-	+2 300	-	37°27'47.4"N 126°54'47.0"E	-	RNP APCH	SDF
006	TF	GT006	-	324 (315.3)	1.3	-	+2 000	-	37°28'42.2"N 126°53'38.9"E	-	RNP APCH	FAF
007	TF	RW32R	Y	324 (315.0)	5.9	-	+670	-	37°32'51.89"N 126°48'25.58"E	-3.06/50	RNP APCH	MAPt
008	TF	DT993	-	323 (314.4)	7.5	-	-	-	37°38'07.5"N 126°41'39.6"E	-	RNP APCH	-
009	TF	CAVOI	Y	235 (226.5)	8.8	-	+4 000	-	37°32'02.0"N 126°33'37.0"E	-	RNP APCH	-

HOLDING PROCEDURE

Holding Identification	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Time (min)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
RNP RWY 32R	HM	BUMSI	Y	324 (315.2)	1	R	-9 000 +8 000	-230	37°15'10.2"N 127°10'09.6"E	-	RNAV 1	-
	HM	CAVOI	Y	301 (292.2)	1	R	-6 000 +4 000	-	37°32'02.0"N 126°33'37.0"E	-	RNAV 1	-

INSTRUMENT APPROACH CHART-ICAO
Note : Approach under ICAO Flight Procedures.

AERODROME ELEV 59 ft
HEIGHTS RELATED TO
THR RWY 32R - ELEV **42** ft

SEOUL APP	119.75
	119.1
GIMPO TWR	118.1
	118.05

SEOUL/Gimpo Intl(RKSS)

VOR RWY 32R

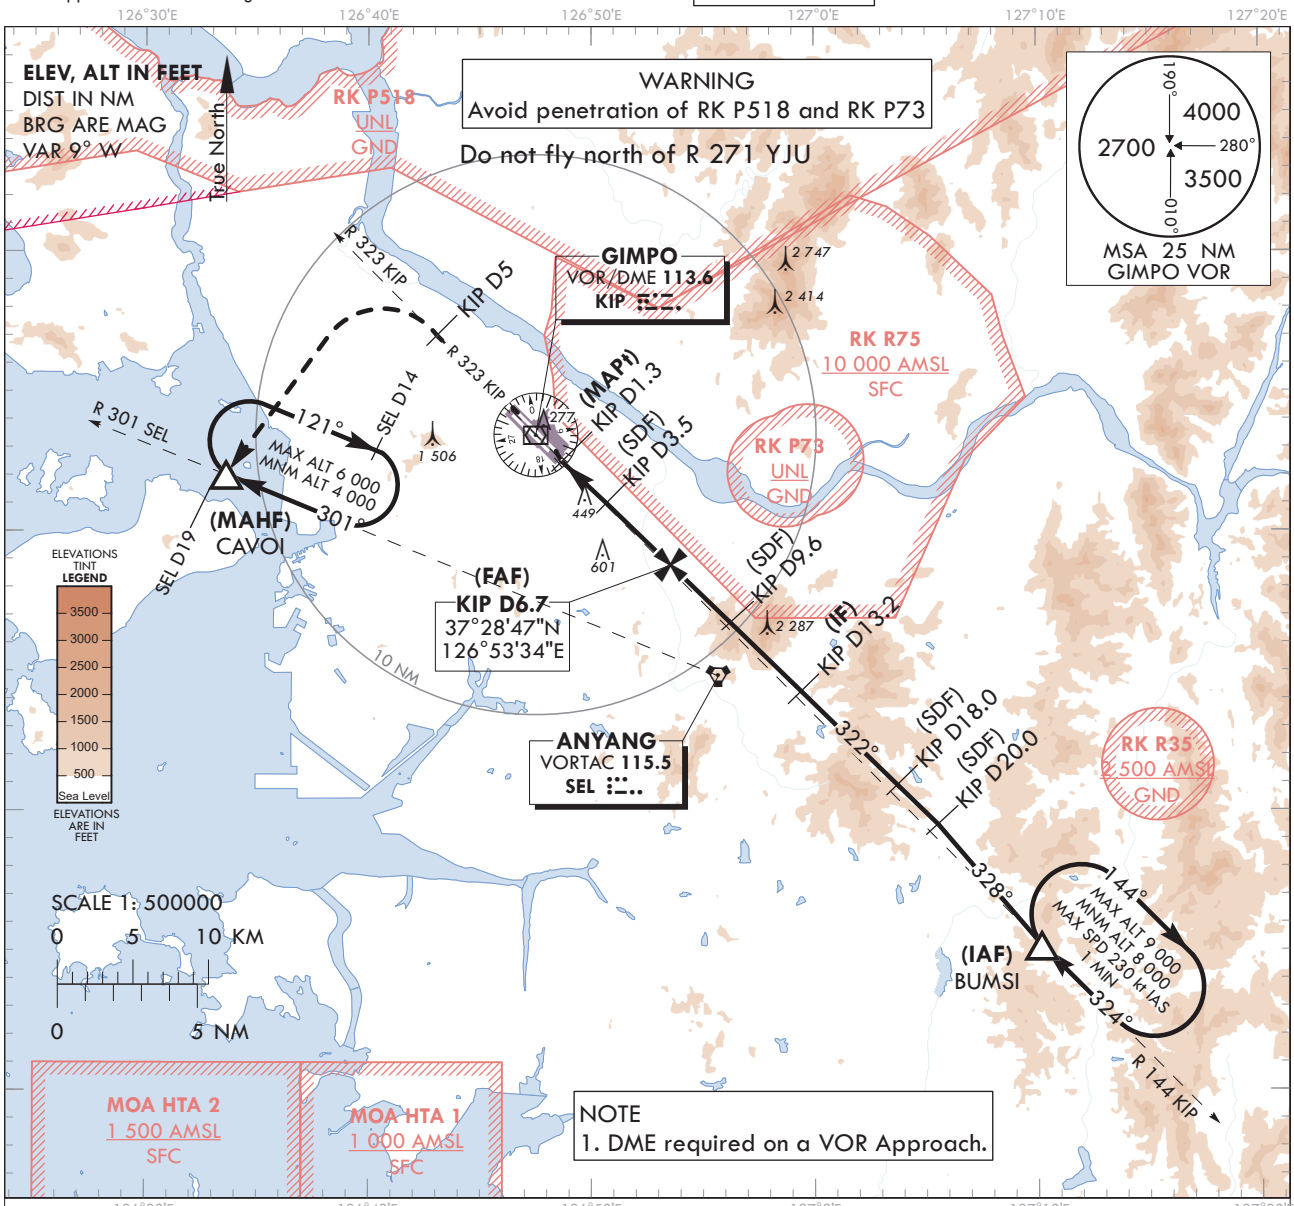

RECOMMENDED PROFILE	DME KIP	6	5	4	3
Final Gradient 5.2%(318.8 ft/NM)to SDF, 5.7%(345.5 ft/NM) to THR	ALT(HGT)	1 779 (1 737)	1 460 (1 418)	1 141 (1 399)	809 (767)

MISSED APPROACH
Climb to 4 000 ft on R 323 KIP to 5 DME then turn left direct to CAVOI.
Hold as published.

TRANSITION ALT 14 000
TRANSITION LVL FL 140

NOTE
1.Missed approach turn limited to 220 kt IAS maximum.

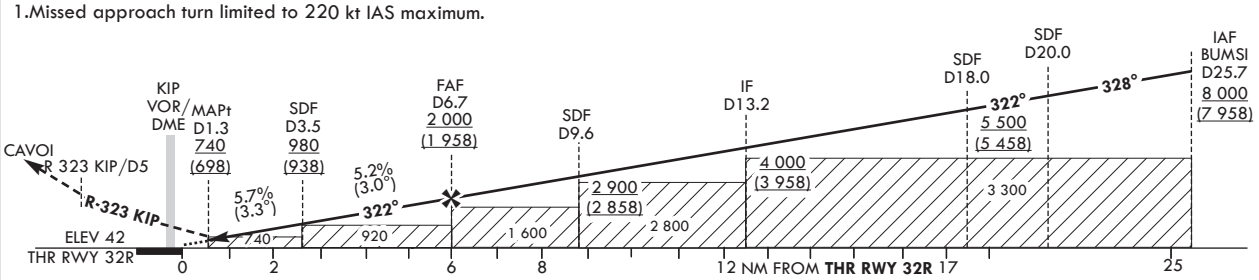

						Knots	60	90	120	150	180
OCA (H)	A	B	C	D	Rate of descent	V/V fpm	331	486	661	827	992
Straight-in Approach	740 (698)				* Timing Not authorized for defining MAPt. * Circling Not authorized.						

Change : Information of landing minima(OCA(H)).

SEOUL/Gimpo Intl(RKSS)
VOR RWY 32R

AERONAUTICAL DATA TABULATION

VOR Approach to RWY 32R from BUMSI			
Fix / Point		Coordinates	
BUMSI(IAF)		37°15'10.2"N	127°10'09.6"E
D20 KIP(SDF)	BRG 327.70°/5.69 NM	37°19'29.9"N	127°05'32.0"E
D18 KIP(SDF)	BRG 322.48°/18.00 NM KIP	37°20'53.8"N	127°03'44.2"E
D13.2 KIP(IF)	BRG 322.48°/13.20 NM KIP	37°24'15.2"N	126°59'25.7"E
D9.6 KIP(SDF)	BRG 322.48°/9.60 NM KIP	37°26'45.9"N	126°56'11.2"E
D6.7 KIP(FAF)	BRG 322.48°/6.70 NM KIP	37°28'47.0"N	126°53'34.1"E
D3.5 KIP(SDF)	BRG 322.48°/3.50 NM KIP	37°31'00.8"N	126°50'40.9"E
D1.3 KIP(MAPt)	BRG 322.48°/1.30 NM KIP	37°32'32.8"N	126°48'41.7"E
THR RWY 32R	Final approach descent angle 3.00°(FAF - SDF)/3.25°(SDF - THR)	37°32'51.89"N	126°48'25.58"E
KIP VOR/DME		37°33'27.1"N	126°47'31.3"E
D5 KIP	R 323 KIP/5.00 NM	37°36'59.7"N	126°43'04.6"E
CAVOI	BRG 223.11°/19.00 NM SEL	37°32'02.0"N	126°33'37.0"E