INSTRUMENT APPROACH CHART - ICAO


Note : Approach Under ICAO Flight Procedures.

AERODROME ELEV 120 ft
HEIGHTS RELATED TO
THR RWY 13R - ELEV **110** ft

DAEGU APP 135.9
DAEGU TWR 126.2

DAEGU/Daegu Intl(RKTN)

ILS Y or LOC Y RWY 13R

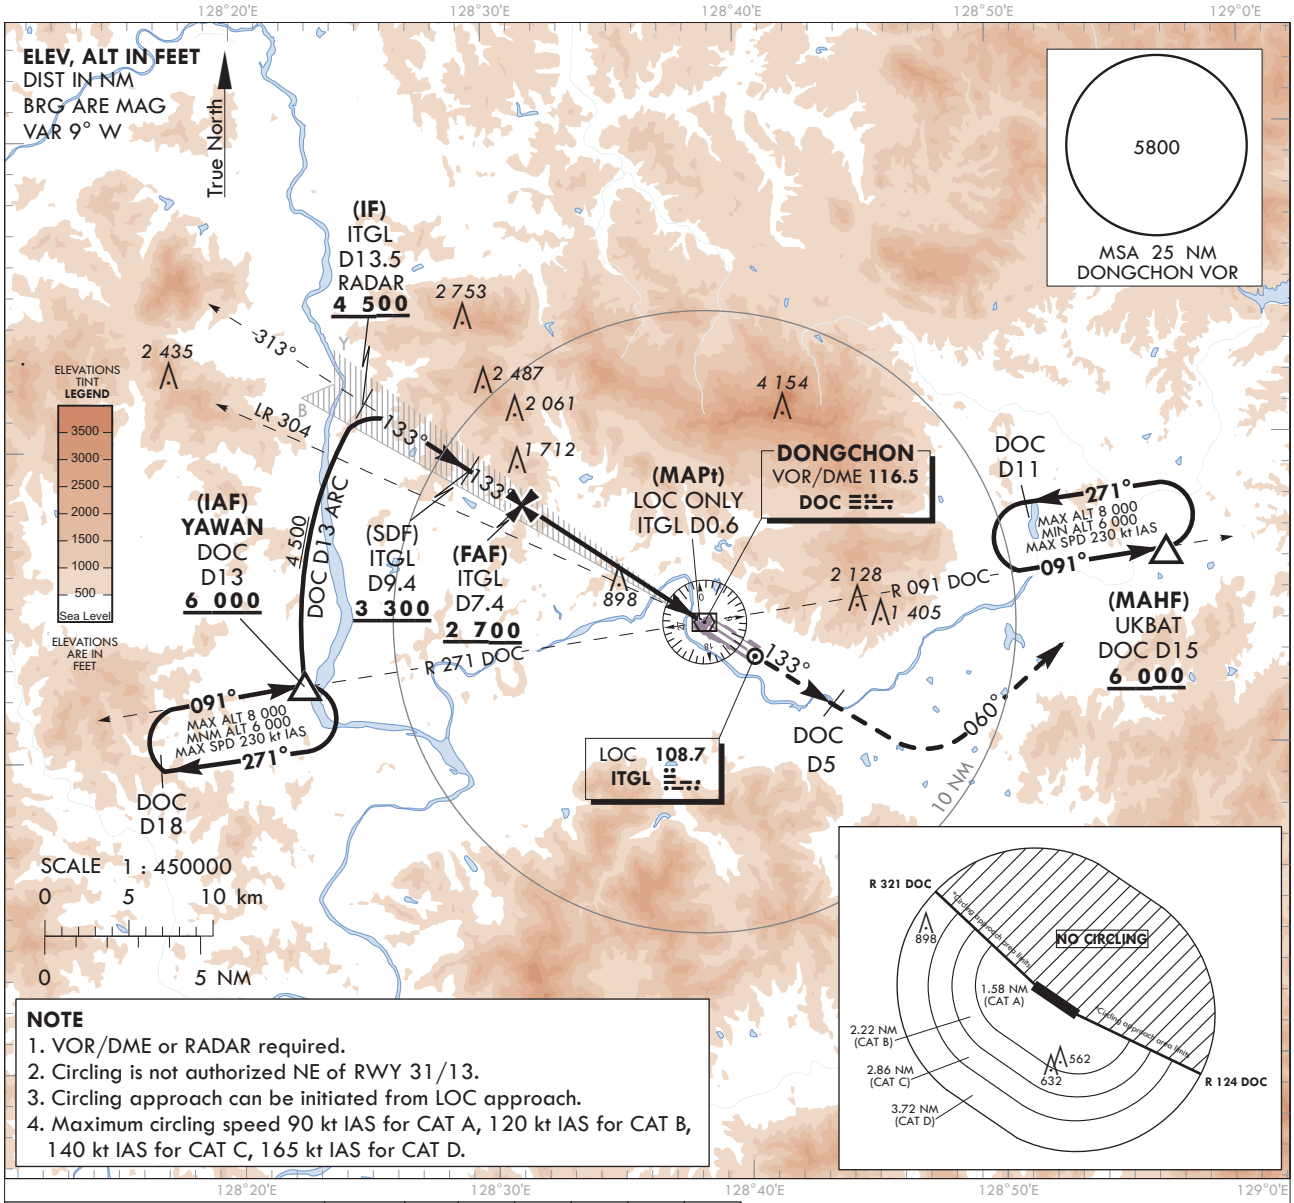


NOTE
1. VOR/DME or RADAR required.
2. Circling is not authorized NE of RWY 31/13.
3. Circling approach can be initiated from LOC approach.
4. Maximum circling speed 90 kt IAS for CAT A, 120 kt IAS for CAT B, 140 kt IAS for CAT C, 165 kt IAS for CAT D.

RECOMMENDED PROFILE(LOC ONLY)	DME ITGL	7	6	5	4	3	2
Final Approach Gradient 5.88%, 357 ft/NM	ALT(HGT)	2 609 (2 499)	2 252 (2 142)	1 895 (1 785)	1 537 (1 427)	1 180 (1 070)	823 (713)

MISSED APPROACH
Climb to 6 000 ft via HDG 133° to DOC 5 DME and climbing left turn HDG 060° to intercept R 091 DOC and R 091 DOC to UKBAT and Hold at or above 6 000 ft.

NOTE
1. Missed approach minimum climb gradient of
(OCH 546) 6.5% CG required until 6 000 ft due airspace restrictions only.
(OCH 1 150) 5.0% CG required until 6 000 ft due airspace restrictions only.
2. If unable to comply with flight restrictions, advise ATC for alternative.

TRANSITION ALT 14 000
TRANSITION LVL FL 140

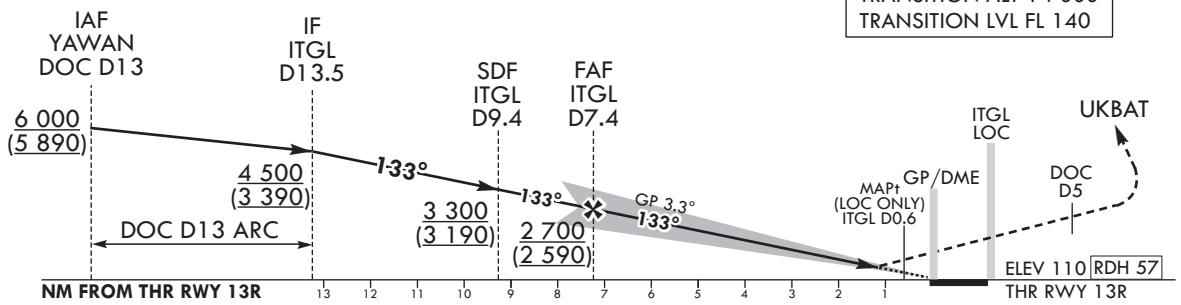

Knots	60	90	120	150	180
Rate of descent V/V fpm	350	526	701	876	1 051

OCA(H)		A	B	C	D
Straight-in Approach	CAT-I	656 (546)			
	LOC	1 260 (1 150)			
Circling		1 260 (1 140)			1 350 (1 230)

- Timing Not authorized for defining MAPt.
- OCH for Circling related to aerodrome ELEV 120 ft.
- CAUTION : Missed APCH CG(6.5%) greater than ICAO standard(5.0%).

Change : Improved clarity such as terrain.

DAEGU/Daegu Intl(RKTN)
ILS Y or LOC Y RWY 13R

AERONAUTICAL DATA TABULATION

ILS/LOC Approach to RWY 13R from YAWAN(IAF)			
Fix / Point		Coordinates	
YAWAN(IAF)	R 271/13.00 NM DOC	35°52'24.8"N	128°22'38.0"E
D13.5 ITGL(IF)	BRG 132.71°/13.50 NM ITGL	36°01'30.6"N	128°25'12.1"E
D9.4 ITGL(SDF)	BRG 132.75°/9.40 NM ITGL	35°59'13.9"N	128°29'20.5"E
D7.4 ITGL(FAF)	BRG 132.77°/7.40 NM ITGL	35°58'06.5"N	128°31'22.8"E
D0.6 ITGL (MAPt LOC ONLY)	BRG 132.84°/0.60 NM ITGL	35°54'17.1"N	128°38'18.2"E
THR RWY 13R		35°54'02.19"N	128°38'45.07"E
DME ITGL		35°53'54.1"N	128°38'53.0"E
VOR/DME DOC		35°54'13.6"N	128°38'29.0"E
D5 DOC	HDG 133	35°51'22.8"N	128°43'32.7"E
UKBAT	R 091/15.00 NM DOC	35°56'16.5"N	128°56'47.1"E

Change : Information of coordinates for YAWAN.

INSTRUMENT APPROACH CHART - ICAO


Note : Approach under ICAO Flight Procedures.

AERODROME ELEV 120 ft
HEIGHTS RELATED TO
THR RWY 31L - ELEV **118** ft

DAEGU APP 135.9
DAEGU TWR 126.2

DAEGU/Daegu Intl(RKTN)

ILS Y or LOC Y RWY 31L

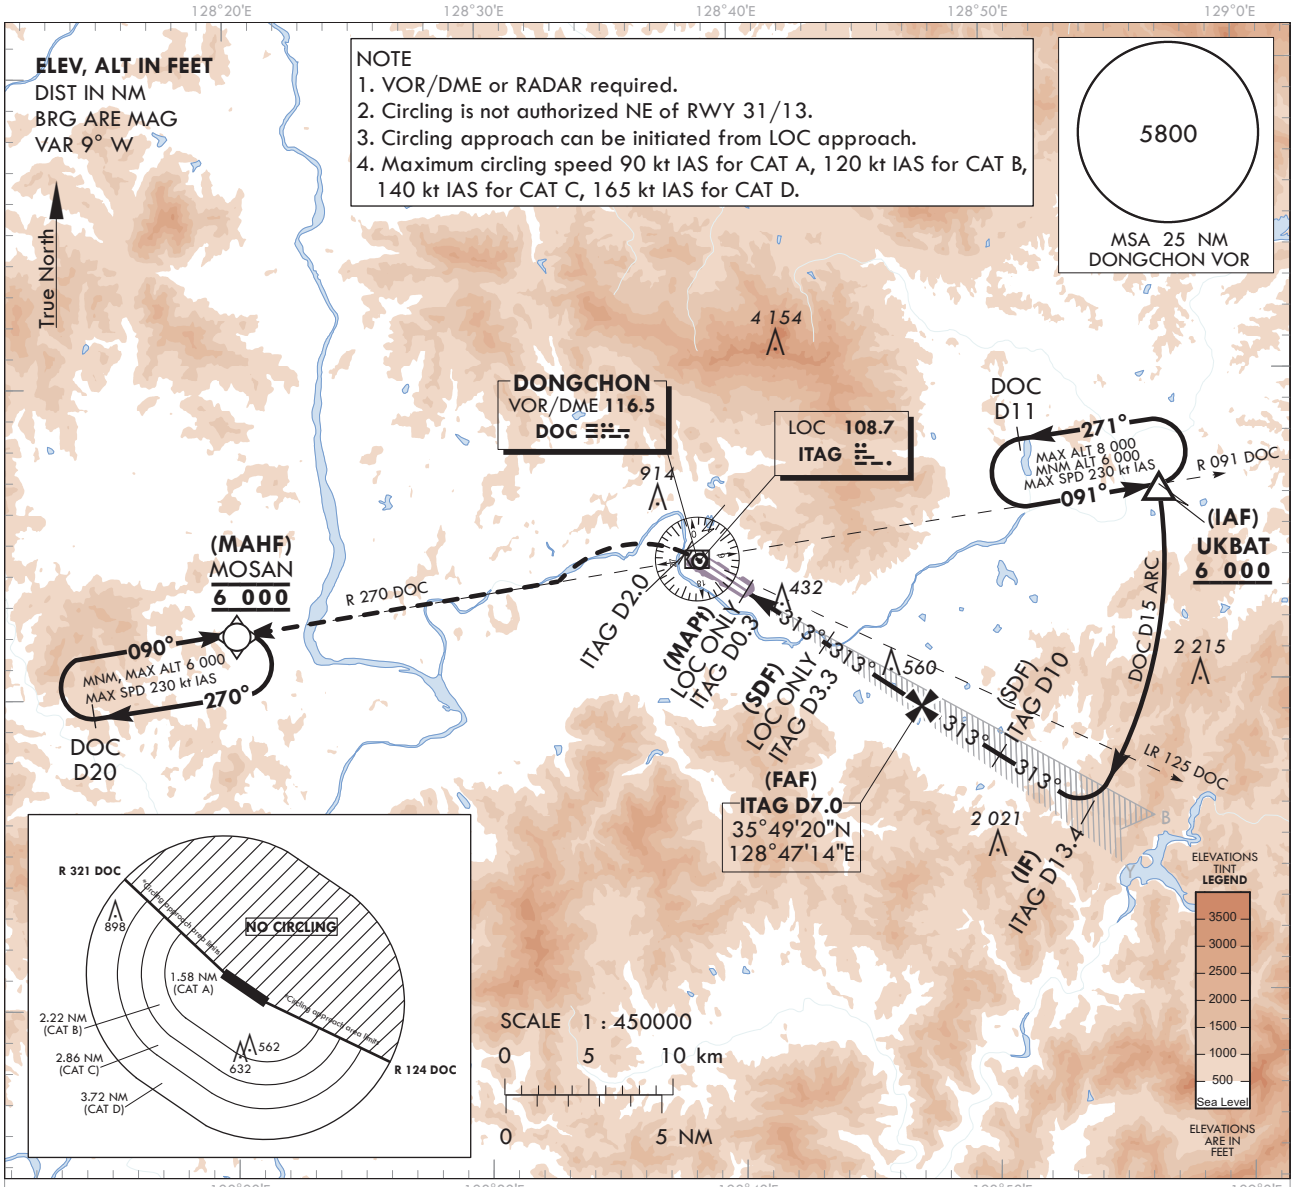


RECOMMENDED PROFILE(LOC ONLY)	DME ITAG	7	6	5	4	3	2
Final Approach Gradient 5.29%(321 ft/NM) to SDF, 5.41%(329 ft/NM) to THR.	ALT(HGT)	2 508 (2 390)	2 187 (2 069)	1 866 (1 748)	1 544 (1 426)	1 101 (983)	773 (655)

TRANSITION ALT 14 000
TRANSITION LVL FL 140

MISSED APPROACH

Climb straight ahead until ITAG D2.0 then left turn to intercept R 270 DOC to MOSAN and Hold at 6 000 ft.

1. 5.7% CG required until 6 000 ft due airspace restrictions only.
2. If unable to comply with flight restrictions, advise ATC for alternative.

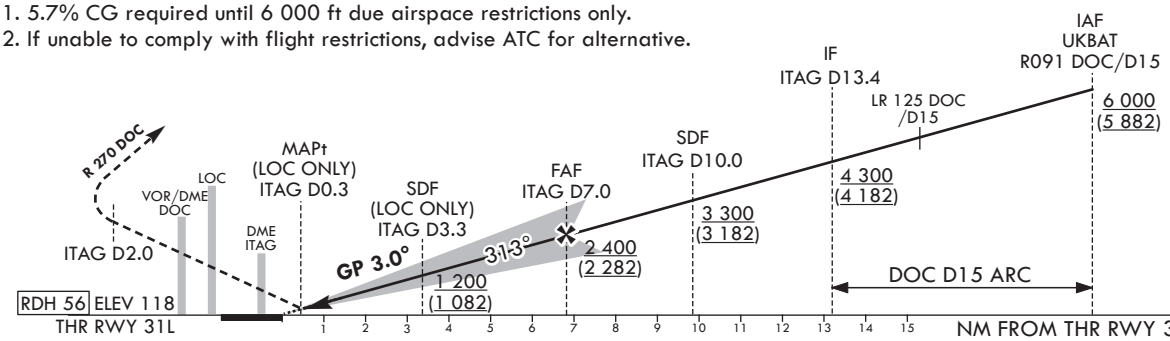

Knots	60	90	120	150	180
Rate of descent V/V fpm	318	478	637	796	955

OCA(H)		A	B	C	D
Straight-in Approach	CAT-I	318 (200)			
	LOC	740 (620)			
Circling		910 (790)	980 (860)	1 080 (960)	1 350 (1 230)

* Timing Not authorized for defining MAPt.
* OCH for LOC and Circling related to aerodrome ELEV 120 ft.
* CAUTION : Missed APCH CG(5.7%) greater than ICAO standard(5.0%).

Change : Information of missed approach procedure and Improved clarity such as terrain.

DAEGU/Daegu Intl(RKTN)
ILS Y or LOC Y RWY 31L

AERONAUTICAL DATA TABULATION

ILS/LOC Approach to RWY 31L from UKBAT(IAF)			
Fix / Point		Coordinates	
UKBAT(IAF)	15 DME ARC/15.00 NM DOC	35°56'16.5"N	128°56'47.1"E
D13.4 ITAG(IF)	BRG 312.99°/13.40 NM ITAG	35°45'43.9"N	128°53'42.4"E
D10.0 ITAG(SDF)	BRG 312.96°/10.00 NM ITAG	35°47'39.5"N	128°50'14.8"E
D7.0 ITAG(FAF)	BRG 312.93°/7.00 NM ITAG	35°49'19.7"N	128°47'14.5"E
D3.3 ITAG(SDF LOC only)	BRG 312.93°/3.30 NM ITAG	35°51'26.4"N	128°43'26.4"E
D0.3 ITAG(MAPt LOC only)	BRG 312.89°/0.30 NM ITAG	35°53'07.9"N	128°40'23.1"E
THR RWY 31L		35°53'11.91"N	128°40'15.91"E
DME ITAG		35°53'15.5"N	128°40'03.0"E
DOC VOR/DME		35°54'13.6"N	128°38'29.0"E
D2.0 ITAG	HDG 313/2.00 NM ITAG	35°54'25.5"N	128°38'02.9"E
MOSAN	R 270/15.00 NM DOC	35°51'58.4"N	128°20'14.0"E

INSTRUMENT APPROACH CHART - ICAO


Note : Approach under ICAO Flight Procedures.

AERODROME ELEV 120ft
HEIGHTS RELATED TO
THR RWY 31R - ELEV **120** ft

DAEGU	APP	135.9
DAEGU	TWR	126.2

DAEGU/Daegu Intl(RKTN)

LOC Y RWY 31R

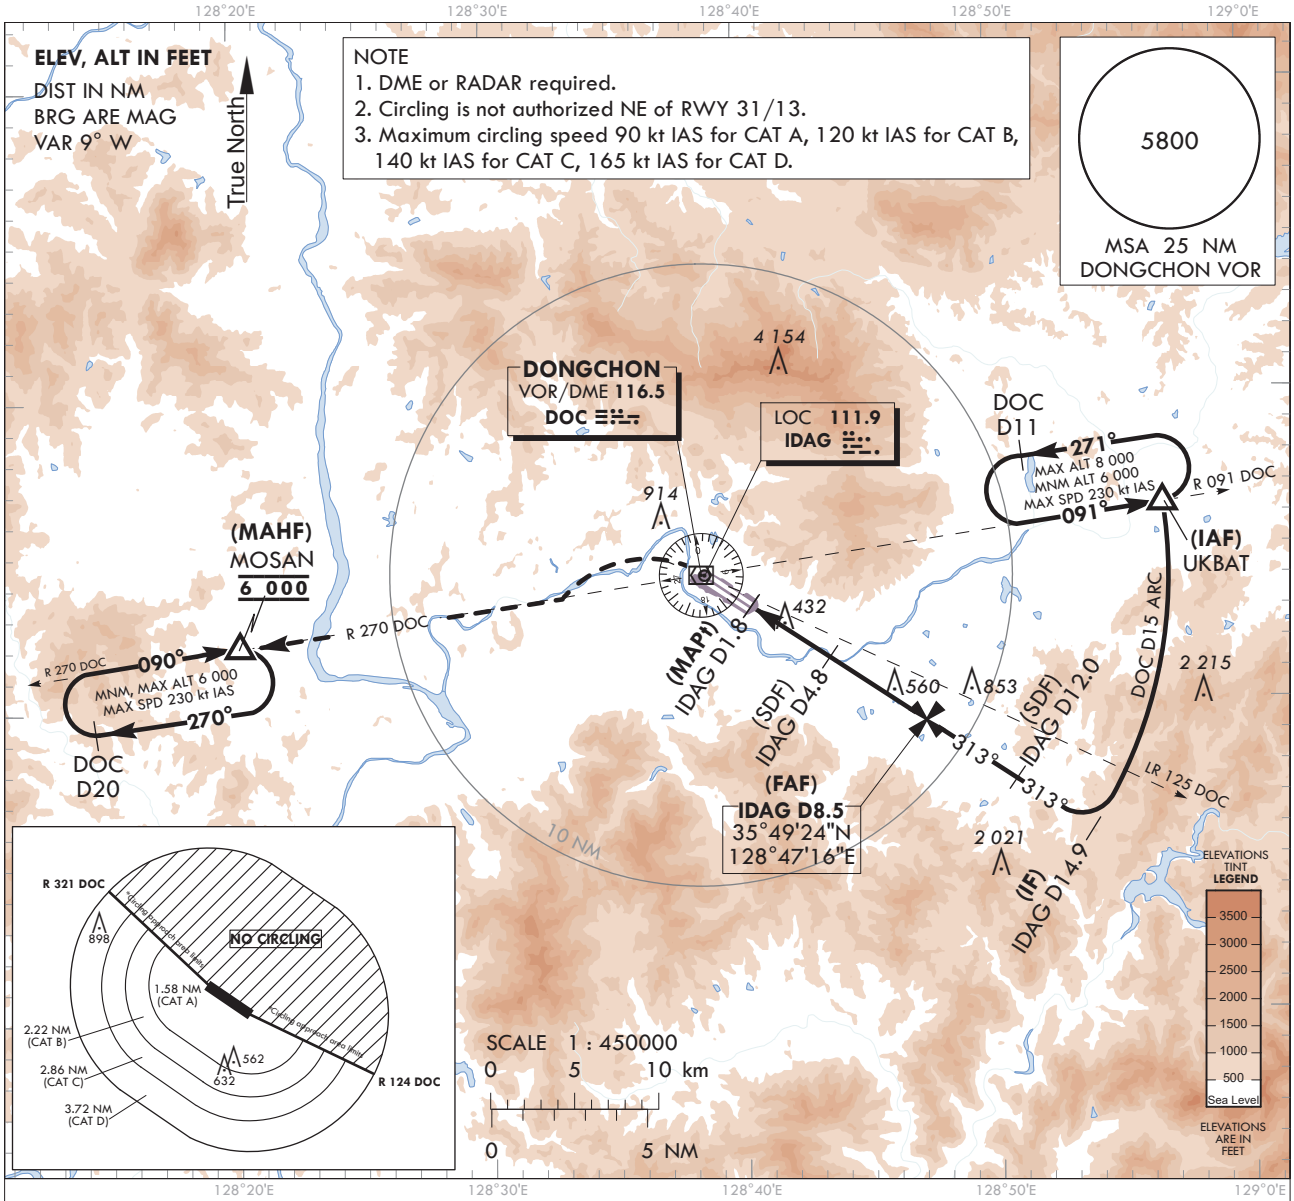


RECOMMENDED PROFILE(LOC ONLY)	DME IDAG	8	7	6	5	4	3
Final Approach Gradient 5.35%(325 ft/NM) to SDF, 5.34%(324 ft/NM) to THR.	ALT(HGT)	2 361 (2 241)	2 036 (1 916)	1 711 (1 591)	1 385 (1 265)	941 (821)	616 (496)

TRANSITION ALT 14 000
TRANSITION LVL FL 140

MISSED APPROACH

Climb to 6 000 ft via direct to DOC and climbing left turn to intercept R 270 DOC and R 270 DOC to MOSAN and Hold at 6 000 ft.

1. 5.7% CG required until 6 000 ft due airspace restrictions only.
2. If unable to comply with flight restrictions, advise ATC for alternative.

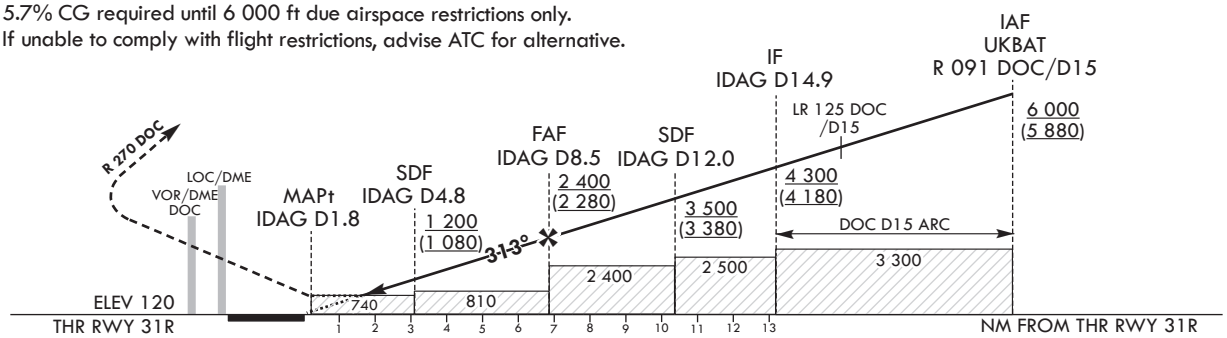

OCA(H)		A	B	C	D
Straight-in Approach	LOC	740 (620)			
Circling		910 (790)	980 (860)	1 080 (960)	1 350 (1 230)

Rate of descent	Knots	60	90	120	150	180
	V/V fpm	325	487	650	812	974

* Timing Not authorized for defining MAPt.
* OCH for LOC and Circling related to aerodrome ELEV 120 ft.
* CAUTION : Missed APCH CG(5.7%) greater than ICAO standard(5.0%).

Change : Information of missed approach procedure and Improved clarity such as terrain.

DAEGU/Daegu Intl(RKTN)
LOC Y RWY 31R

AERONAUTICAL DATA TABULATION

LOC Y Approach to RWY 31R from UKBAT(IAF)			
Fix / Point		Coordinates	
UKBAT(IAF)	15 DME ARC/15.00 NM DOC	35°56'16.5"N	128°56'47.1"E
D14.9 IDAG(IF)	BRG 312.99°/14.90 NM IDAG	35°45'47.6"N	128°53'44.9"E
D12.0 IDAG(SDF)	BRG 312.96°/12.00 NM IDAG	35°47'25.6"N	128°50'48.9"E
D8.5 IDAG(FAF)	BRG 312.92°/8.50 NM IDAG	35°49'24.2"N	128°47'15.7"E
D4.8 IDAG(SDF)	BRG 312.89°/4.80 NM IDAG	35°51'29.4"N	128°43'30.0"E
D1.8 IDAG(MAPt)	BRG 311.82°/1.80 NM IDAG	35°53'10.8"N	128°40'26.9"E
THR RWY 31R		35°53'15.29"N	128°40'18.89"E
DME IDAG		35°54'13.7"N	128°38'38.8"E
DOC VOR/DME		35°54'13.6"N	128°38'29.0"E
MOSAN	R 270/15.00 NM DOC	35°51'58.4"N	128°20'14.0"E

Change : Information of coordinates for THR RWY 31R.

INSTRUMENT APPROACH CHART - ICAO


Note : Approach under ICAO Flight Procedures.

AERODROME ELEV 120 ft
HEIGHTS RELATED TO
THR RWY 31R - ELEV **120** ft

DAEGU APP 135.9
DAEGU TWR 126.2

DAEGU/Daegu Intl(RKTN)

RNP Y RWY 31R

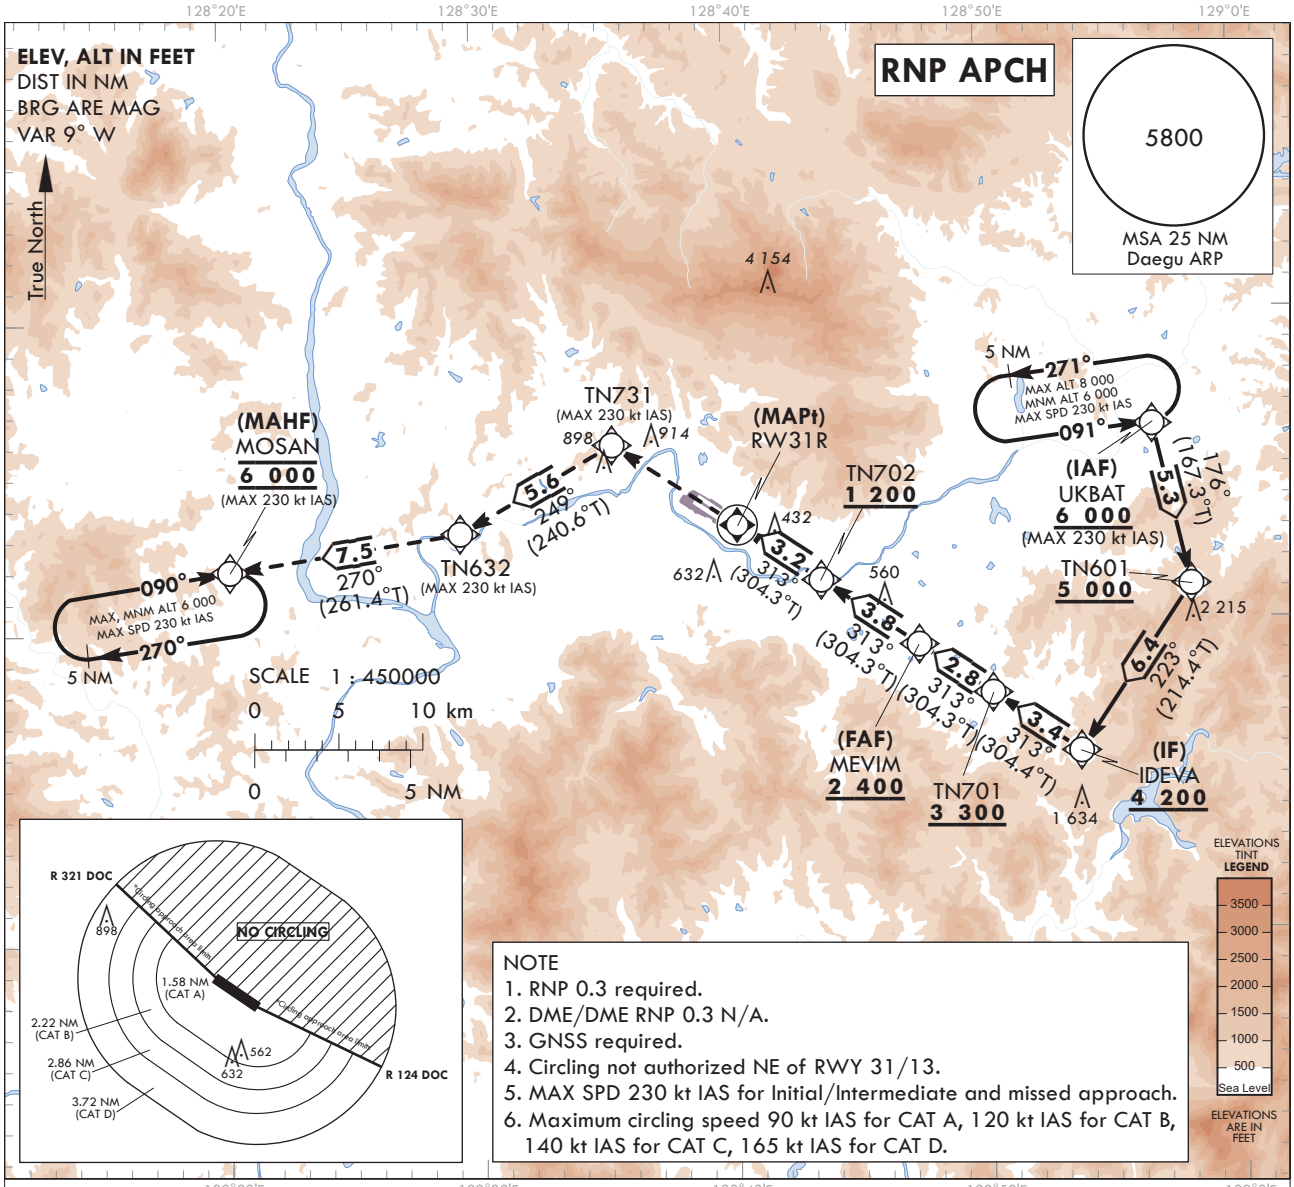


NOTE
1. RNP 0.3 required.
2. DME/DME RNP 0.3 N/A.
3. GNSS required.
4. Circling not authorized NE of RWY 31/13.
5. MAX SPD 230 kt IAS for Initial/Intermediate and missed approach.
6. Maximum circling speed 90 kt IAS for CAT A, 120 kt IAS for CAT B, 140 kt IAS for CAT C, 165 kt IAS for CAT D.

MISSED APPROACH
Climb to 6 000 ft on direct to TN731 and track 249° to TN632 and track 270° to cross MOSAN at 6 000 ft and hold.

TRANSITION ALT 14 000
TRANSITION LVL FL 140

1. 5.3% CG required until 6 000 ft due airspace restrictions only.
2. If unable to comply with flight restrictions, advise ATC for alternative.

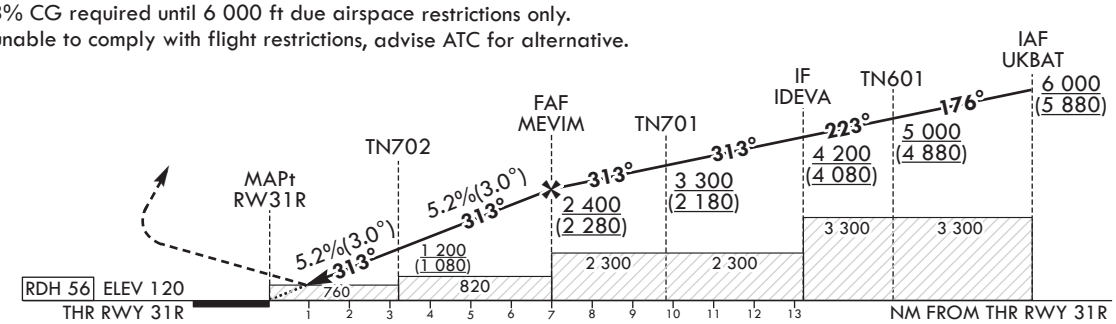

OCA(H)		A	B	C	D
Straight-in Approach	LNAV	760 (640)			
Circling		910 (790)	1 000 (880)	1 080 (960)	1 350 (1 230)

Knots	60	90	120	150	180
Rate of descent V/V fpm	318	477	636	796	955

* Timing Not authorized for defining MAPt.
* OCH for Circling and LNAV related to aerodrome ELEV 120 ft.
* CAUTION : Missed APCH CG(5.3%) greater than ICAO standard(5.0%).

Change : Improved clarity such as terrain.

Instrument Approach Procedure Coding Tables

RNP Y RWY 31R

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	UKBAT	-	-	-	-	+6 000	-230	35°56'16.5"N 128°56'47.1"E	-	RNP APCH	IAF
002	TF	TN601	-	176(167.3)	5.3	-	+5 000	-230	35°51'06.5"N 128°58'12.6"E	-	RNP APCH	-
003	TF	IDEVA	-	223(214.4)	6.4	-	+4 200	-230	35°45'47.6"N 128°53'44.7"E	-	RNP APCH	IF
004	TF	TN701	-	313(304.4)	3.4	-	+3 300	-230	35°47'42.9"N 128°50'17.7"E	-	RNP APCH	-
005	TF	MEVIM	-	313(304.3)	2.8	-	+2 400	-230	35°49'18.8"N 128°47'25.2"E	-	RNP APCH	FAF
006	TF	TN702	-	313(304.3)	3.8	-	+1 200	-	35°51'26.4"N 128°43'35.4"E	-3.00/56	RNP APCH	SDF
007	TF	RW31R	Y	313(304.3)	3.2	-	-	-	35°53'15.29"N 128°40'18.89"E	-	RNP APCH	MAPt
008	DF	TN731	-	-	-	-	-	-230	35°55'53.2"N 128°35'24.2"E	-	RNP APCH	-
009	TF	TN632	-	249(240.6)	5.6	-	-	-230	35°53'06.4"N 128°29'21.3"E	-	RNP APCH	-
010	TF	MOSAN	-	270(261.4)	7.5	-	@6 000	-230	35°51'58.4"N 128°20'14.0"E	-	RNP APCH	-
011	HM	MOSAN	Y	090(081.8)	-	R	@6 000	-230	35°51'58.4"N 128°20'14.0"E	-	RNP APCH	5 NM (Outbound Leg)

HOLDING PROCEDURE

Holding Identification	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
RNP Y RWY 31R	HM	UKBAT	Y	091(082.2)	5.0	L	-8 000 +6 000	-230	35°56'16.5"N 128°56'47.1"E	-	RNP 1	-