
STANDARD DEPARTURE CHART INSTRUMENT (SID) - ICAO

TRANSITION	ALT	14 000
TRANSITION	LVL	FL 140

DAEGU	DEP	135.9
DAEGU	TWR	126.2

DAEGU/Daegu Intl(RKTN)
RWY 13L/R RADAR 1E
RWY 31L/R RADAR 1W

Note : Departure under ICAO Flight Procedures.

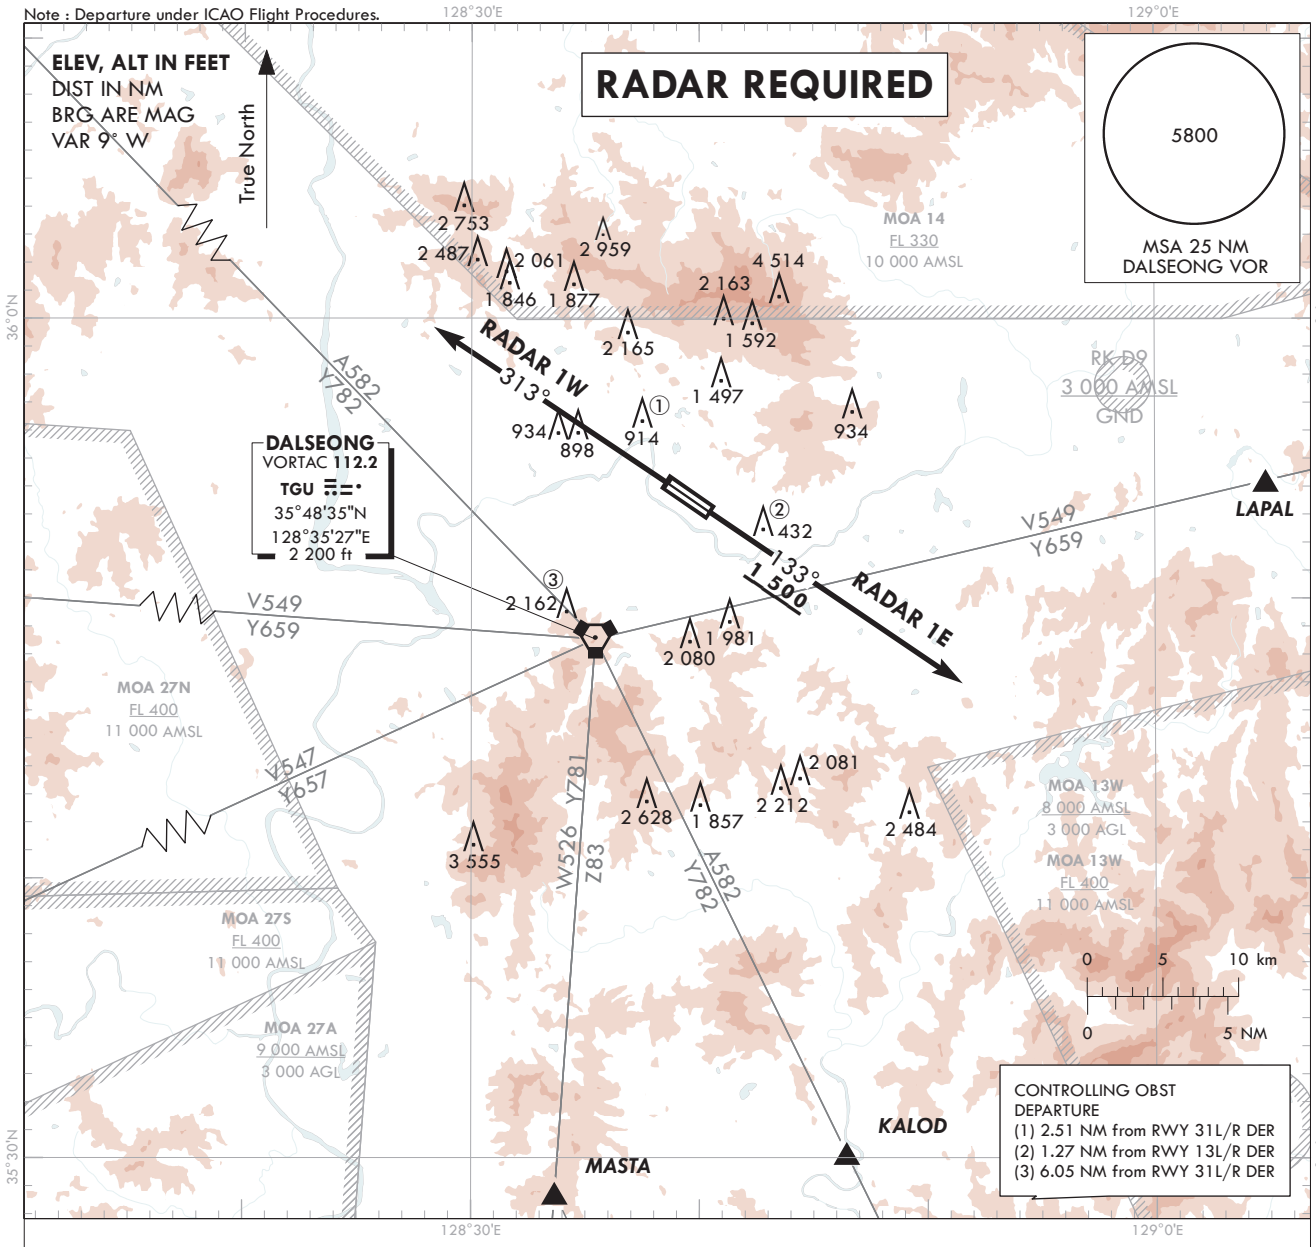

RADAR ONE ECHO DEPARTURE

TAKE OFF RWY 13L/R : Climb on HDG 133° to 1 500 ft, then expect radar vectors to intercept filed enroute fix or navaid. Maintain 8 000 ft or assigned altitude/flight level. Expect filed altitude/flight level 10 minutes after departure.

1. 6.6% CG required until 5 000 ft due airspace restrictions only.
2. If unable to comply with flight restrictions, advise ATC for alternative.

RADAR ONE WHISKEY DEPARTURE

TAKE OFF RWY 31L/R : Climb on HDG 313°, then expect radar vectors to intercept filed enroute fix or navaid. Maintain 8 000 ft or assigned altitude/flight level. Expect filed altitude/flight level 10 minutes after departure.

1. 7.7% CG required until 5 000 ft due airspace restrictions only.
2. If unable to comply with flight restrictions, advise ATC for alternative.

LOST COMMUNICATIONS PROCEDURE

If radio contact is not established with departure control prior to reaching 5 000 ft, Continue climb to 8 000 ft before turning to filed fix/navaid and proceed filed route and altitude.

Change : Amended HGT of OBST(2 480 → 2 080).

INTENTIONALLY

LEFT

BLANK


STANDARD DEPARTURE CHART INSTRUMENT (SID) - ICAO

TRANSITION ALT 14 000
TRANSITION LVL FL 140

DAEGU	DEP	135.9
DAEGU	TWR	126.2

DAEGU/Daegu Intl(RKTN)
RWY 13L/R
BITUX 1B OPEDA 1B
IGDOK 1B MASTA 1B
KALOD 1B LAPAL 1B

Note : Departure under ICAO Flight Procedures.

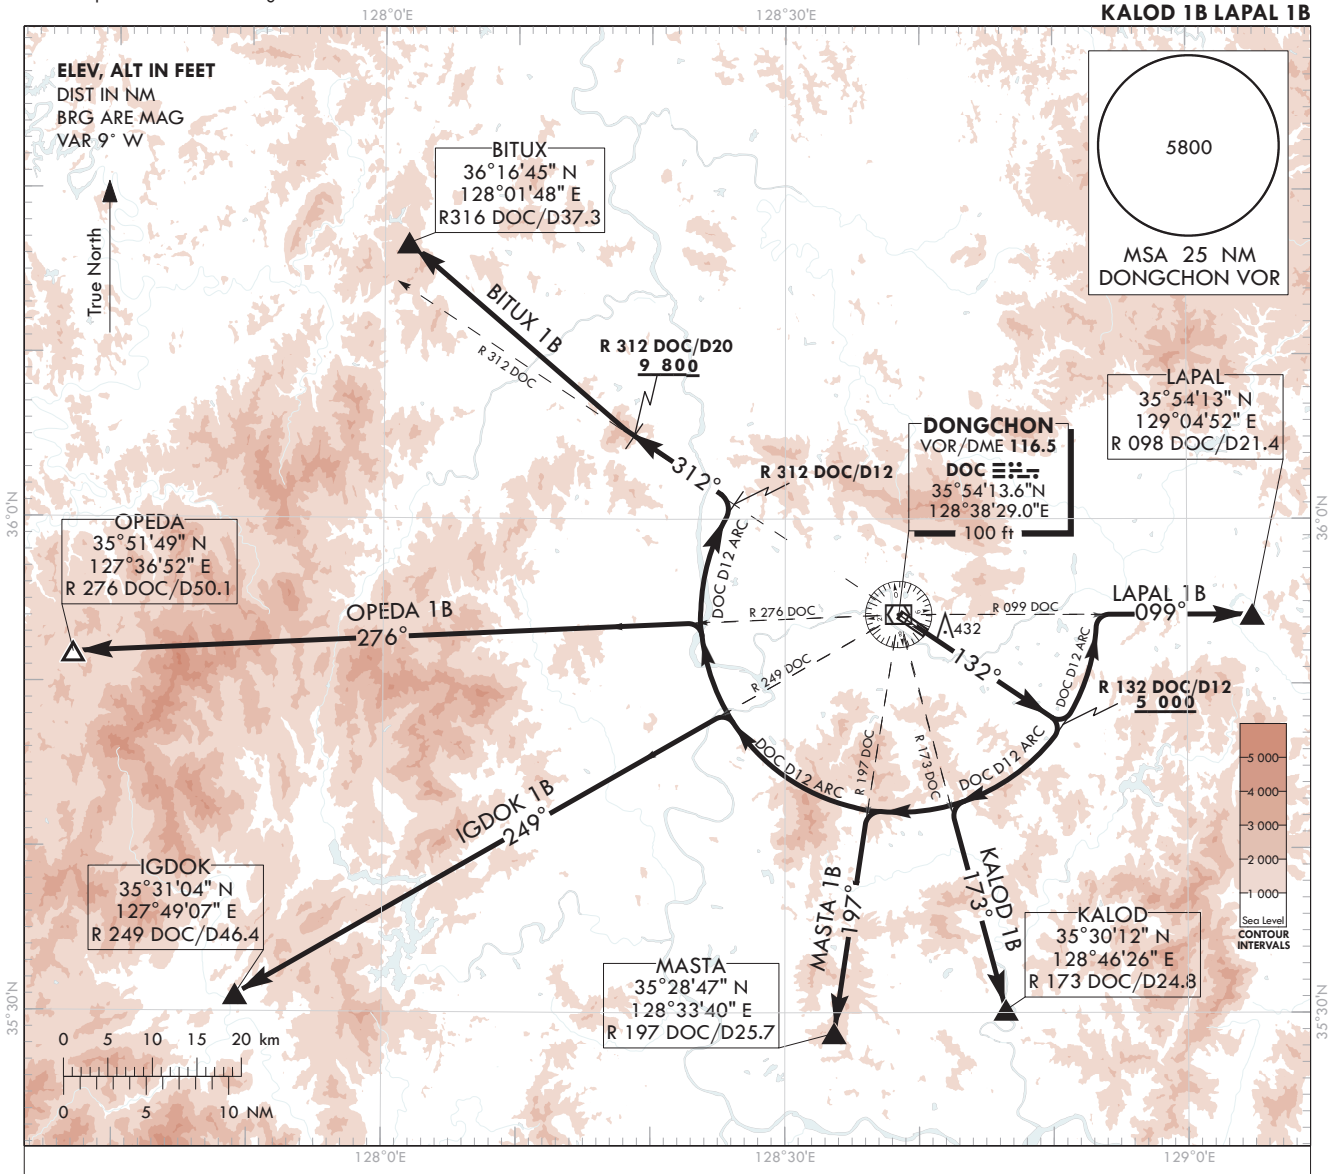

GENERAL INFORMATION

1. 7.9% CG required until 5 000 ft due airspace restrictions only.
2. If unable to comply with flight restrictions, advise ATC for alternative.

BITUX ONE BRAVO DEPARTURE

Climb on HDG 132° to intercept R 132 DOC and proceed to DOC D12 at or above 5 000 ft, then Right turn and proceed via the DOC D12 arc to intercept R 312 DOC/D12 and proceed to R 312 DOC/D20 at or above 9 800 ft, then direct to BITUX.

OPEDA ONE BRAVO DEPARTURE

Climb on HDG 132° to intercept R 132 DOC and proceed to DOC D12 at or above 5 000 ft, then Right turn and proceed via the DOC D12 arc to intercept R 276 DOC/D12 and proceed to OPEDA.

IGDOK ONE BRAVO DEPARTURE

Climb on HDG 132° to intercept R 132 DOC and proceed to DOC D12 at or above 5 000 ft, then Right turn and proceed via the DOC D12 arc to intercept R 249 DOC/D12 and proceed to IGDOK.

MASTA ONE BRAVO DEPARTURE

Climb on HDG 132° to intercept R 132 DOC and proceed to DOC D12 at or above 5 000 ft, then Right turn and proceed via the DOC D12 arc to intercept R 197 DOC/D12 and proceed to MASTA.

KALOD ONE BRAVO DEPARTURE

Climb on HDG 132° to intercept R 132 DOC and proceed to DOC D12 at or above 5 000 ft, then Right turn and proceed via the DOC D12 arc to intercept R 173 DOC/D12 and proceed to KALOD.

LAPAL ONE BRAVO DEPARTURE

Climb on HDG 132° to intercept R 132 DOC and proceed to DOC D12 at or above 5 000 ft, then Left turn and proceed via the DOC D12 arc to intercept R 099 DOC/D12 and proceed to LAPAL.

Change : Information of standard instrument departure procedure for RWY 13L/R.

INTENTIONALLY

LEFT

BLANK


STANDARD DEPARTURE CHART INSTRUMENT (SID) - ICAO

TRANSITION ALT 14 000
TRANSITION LVL FL 140

DAEGU	DEP	135.9
DAEGU	TWR	126.2

DAEGU/Daegu Intl(RKTN)
RWY 31L/R
BITUX 1A OPEDA 1A
IGDOK 1A MASTA 1A
KALOD 1A LAPAL 1A

Note : Departure under ICAO Flight Procedures.

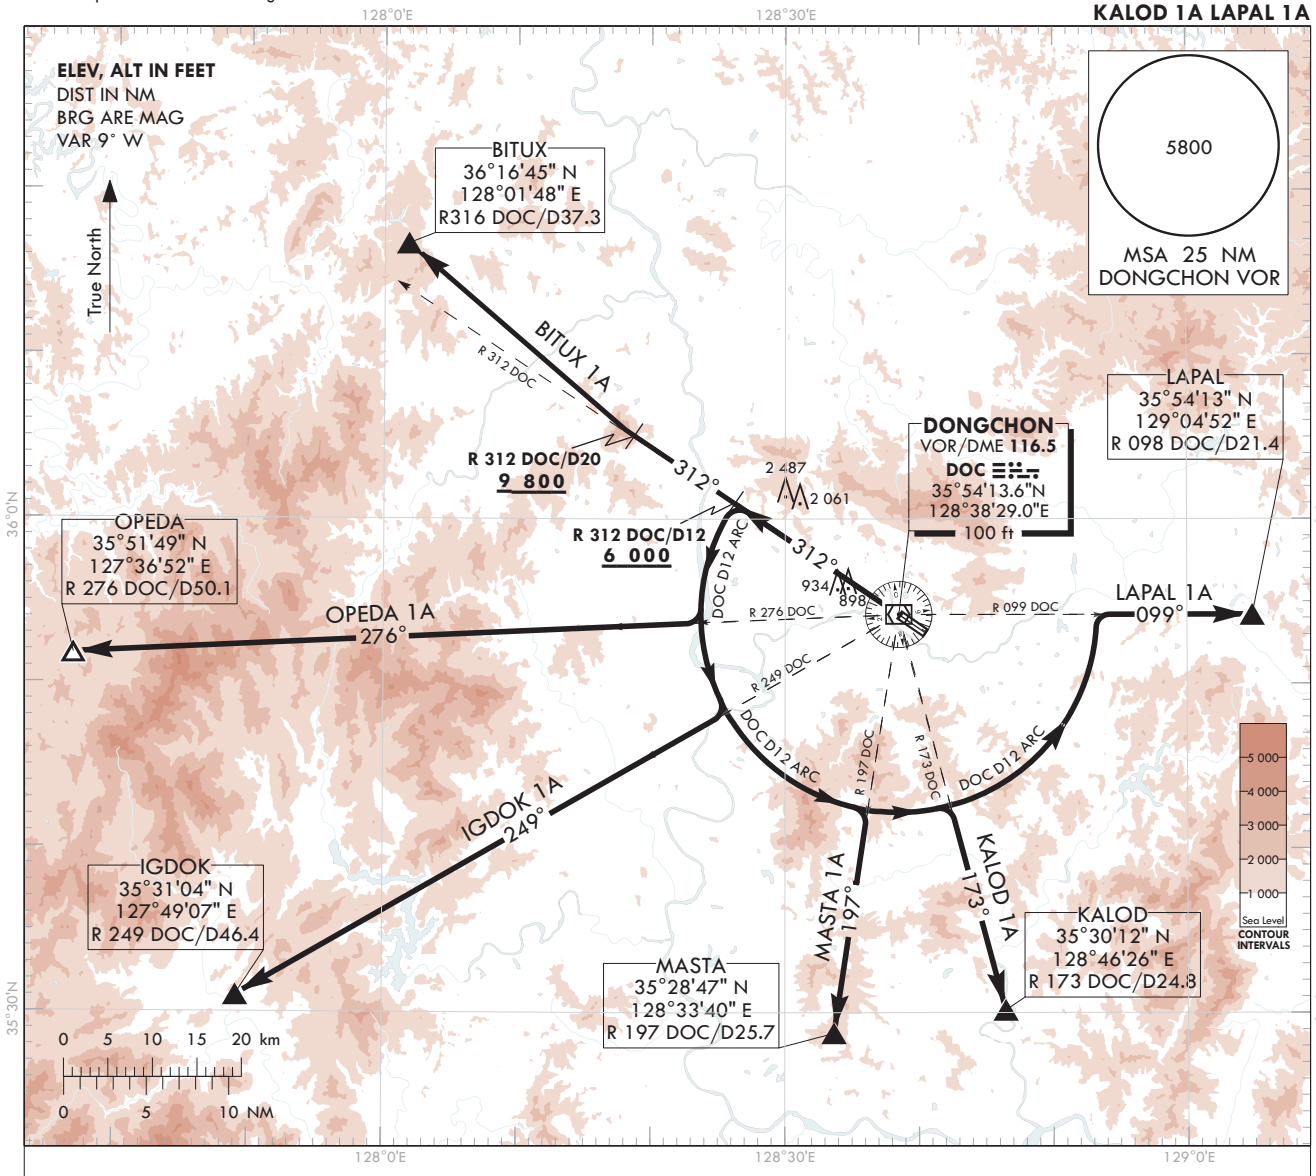

GENERAL INFORMATION

1. 7.9% CG required until 6 000 ft(BITUX ONE ALPHA DEPARTURE : until 9 800 ft) due airspace restrictions only.
2. If unable to comply with flight restrictions, advise ATC for alternative.

BITUX ONE ALPHA DEPARTURE

Climb on HDG 312° to intercept R 312 DOC and proceed to DOC D12 at or above 6 000 ft and proceed to DOC D20 at or above 9 800 ft, then direct to BITUX.

OPEDA ONE ALPHA DEPARTURE

Climb on HDG 312° to intercept R 312 DOC and proceed to DOC D12 at or above 6 000 ft, then Left turn and proceed via the DOC D12 arc to intercept R 276 DOC/D12 and proceed to OPEDA.

IGDOK ONE ALPHA DEPARTURE

Climb on HDG 312° to intercept R 312 DOC and proceed to DOC D12 at or above 6 000 ft, then Left turn and proceed via the DOC D12 arc to intercept R 249 DOC/D12 and proceed to IGDOK.

MASTA ONE ALPHA DEPARTURE

Climb on HDG 312° to intercept R 312 DOC and proceed to DOC D12 at or above 6 000 ft, then Left turn and proceed via the DOC D12 arc to intercept R 197 DOC/D12 and proceed to MASTA.

KALOD ONE ALPHA DEPARTURE

Climb on HDG 312° to intercept R 312 DOC and proceed to DOC D12 at or above 6 000 ft, then Left turn and proceed via the DOC D12 arc to intercept R 173 DOC/D12 and proceed to KALOD.

LAPAL ONE ALPHA DEPARTURE

Climb on HDG 312° to intercept R 312 DOC and proceed to DOC D12 at or above 6 000 ft, then Left turn and proceed via the DOC D12 arc to intercept R 099 DOC/D12 and proceed to LAPAL.

Change : Information of standard instrument departure procedure for RWY 31L/R.

INTENTIONALLY

LEFT

BLANK


STANDARD DEPARTURE CHART INSTRUMENT (SID) - ICAO

Note : Departure under ICAO Flight Procedures.

TRANSITION ALT 14 000
TRANSITION LVL FL 140

DAEGU	DEP	135.9
DAEGU	TWR	126.2

DAEGU/Daegu Intl(RKTN)
RWY 13L/R
RNAV BITUX 1D RNAV OPEDA 1D
RNAV IGDOK 1D RNAV MASTA 1D
RNAV KALOD 1D RNAV LAPAL 1D

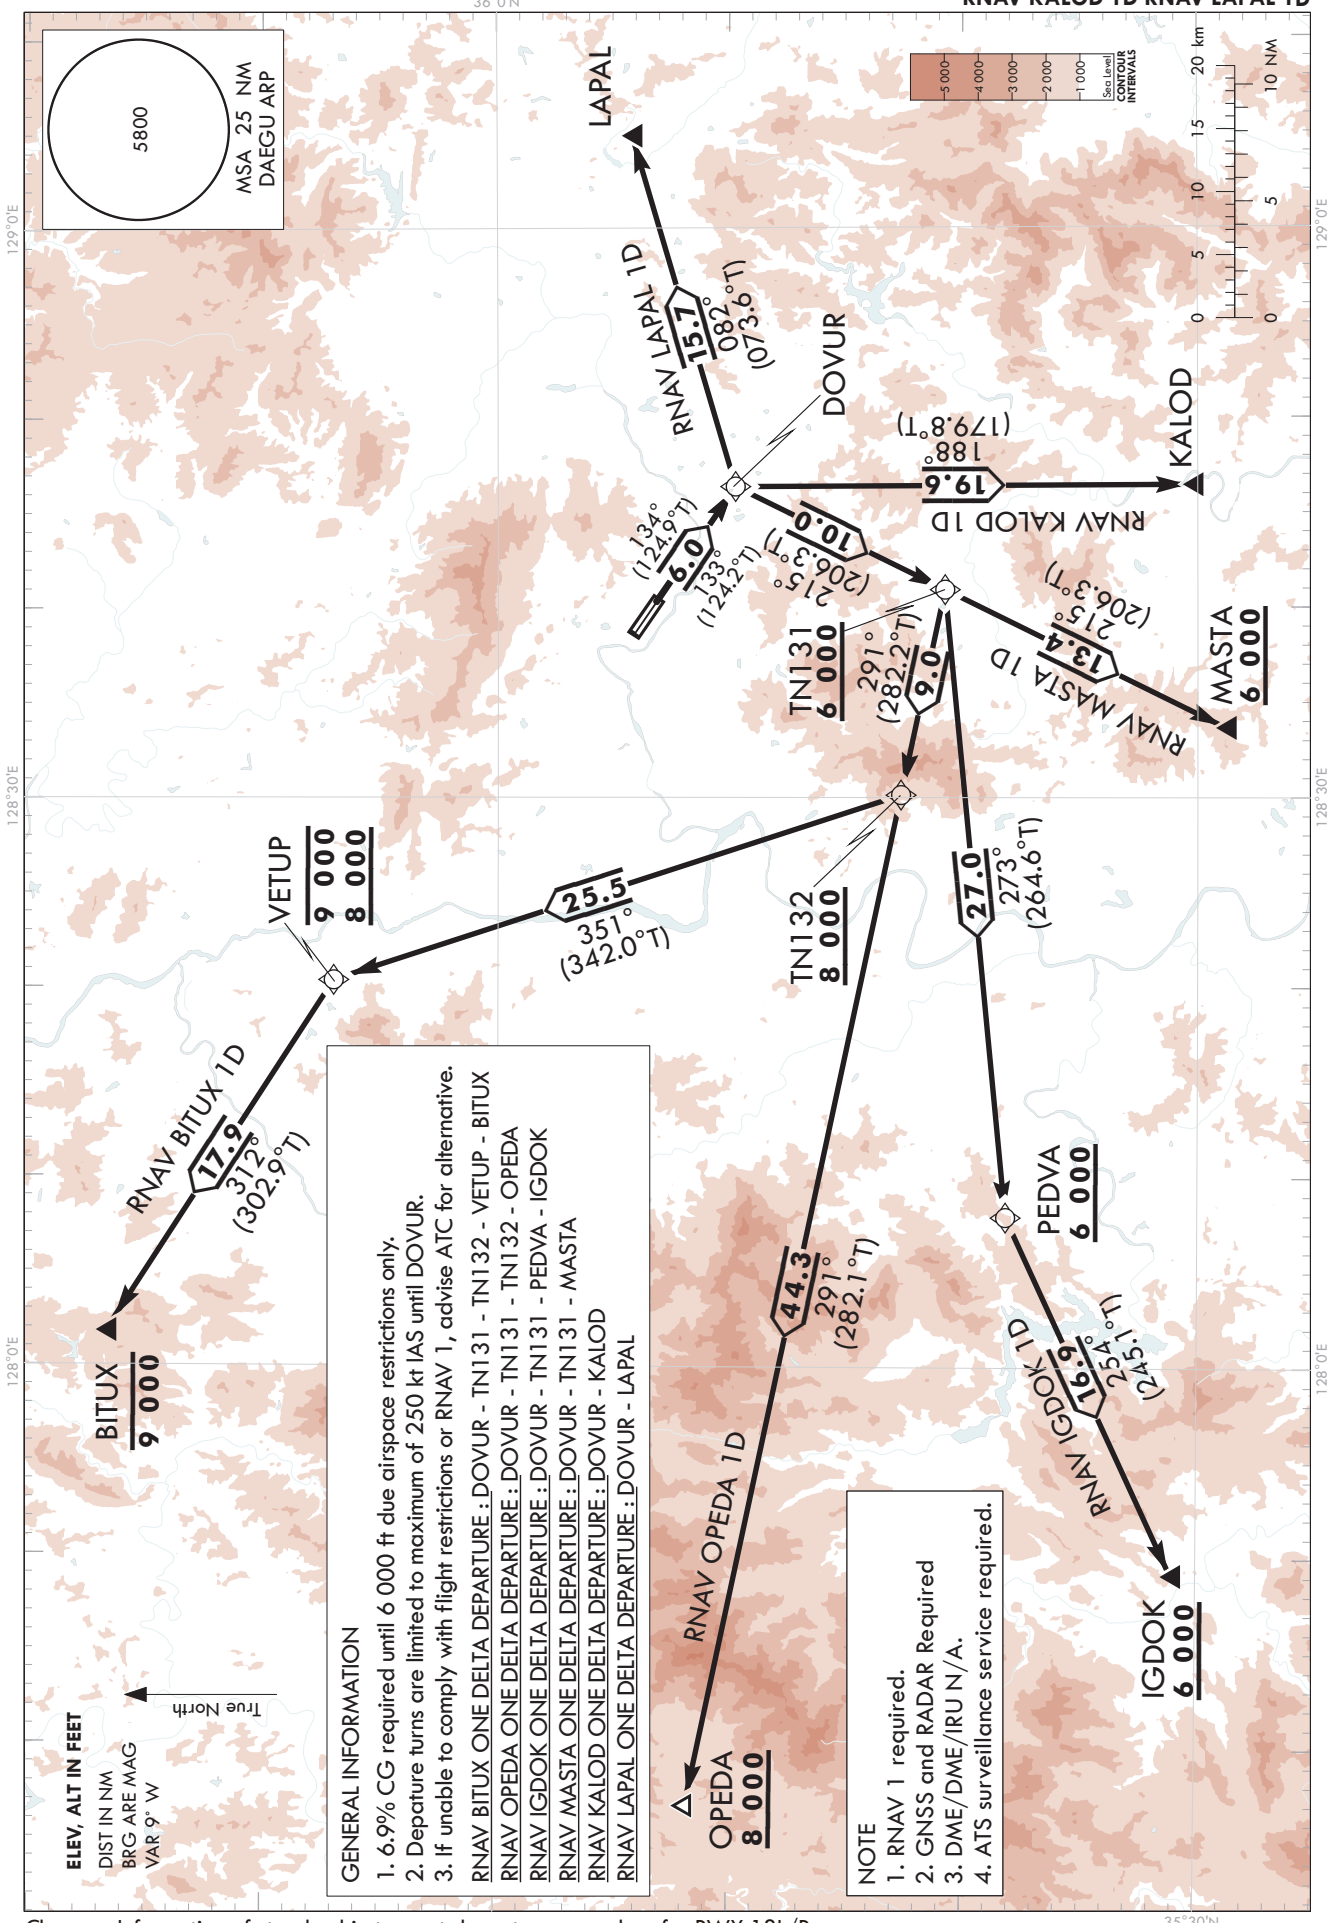

GENERAL INFORMATION

1. 6.9% CG required until 6 000 ft due airspace restrictions only.
2. Departure turns are limited to maximum of 250 kt IAS until DOVUR.
3. If unable to comply with flight restrictions or RNAV 1, advise ATC for alternative.

RNAV BITUX ONE DELTA DEPARTURE : DOVUR - TN131 - TN132 - VETUP - BITUX
RNAV OPEDA ONE DELTA DEPARTURE : DOVUR - TN131 - TN132 - OPEDA
RNAV IGDOK ONE DELTA DEPARTURE : DOVUR - TN131 - PEDVA - IGDOK
RNAV MASTA ONE DELTA DEPARTURE : DOVUR - TN131 - MASTA
RNAV KALOD ONE DELTA DEPARTURE : DOVUR - KALOD
RNAV LAPAL ONE DELTA DEPARTURE : DOVUR - LAPAL

NOTE

1. RNAV 1 required.
2. GNSS and RADAR Required
3. DME/DME/IRU N/A.
4. ATS surveillance service required.

Change : Information of standard instrument departure procedure for RWY 13L/R.

DAEGU/Daegu INTL(RKTN)
RWY 13L/R
RNAV BITUX 1D RNAV OPEDA 1D
RNAV IGDOK 1D RNAV MASTA 1D
RNAV KALOD 1D RNAV LAPAL 1D

AERONAUTICAL DATA TABULATION

Standard Instrument Departure Procedure Coding Tables

RNAV BITUX 1D

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	DOVUR	-	13L-134(124.9) 13R-133(124.2)	6.0	-	-	-250	35°49'48.9"N 128°46'21.9"E	-	RNAV 1	-
002	TF	TN131	-	215(206.3)	10.0	-	+6 000	-	35°40'50.1"N 128°40'55.5"E	-	RNAV 1	-
003	TF	TN132	-	291(282.2)	9.0	-	+8 000	-	35°42'43.8"N 128°30'07.4"E	-	RNAV 1	-
004	TF	VETUP	-	351(342.0)	25.5	-	-9 000 +8 000	-	36°07'02.7"N 128°20'21.4"E	-	RNAV 1	-
005	TF	BITUX	-	312(302.9)	17.9	-	-9 000	-	36°16'44.9"N 128°01'47.9"E	-	RNAV 1	-

RNAV OPEDA 1D

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	DOVUR	-	13L-134(124.9) 13R-133(124.2)	6.0	-	-	-250	35°49'48.9"N 128°46'21.9"E	-	RNAV 1	-
002	TF	TN131	-	215(206.3)	10.0	-	+6 000	-	35°40'50.1"N 128°40'55.5"E	-	RNAV 1	-
003	TF	TN132	-	291(282.2)	9.0	-	+8 000	-	35°42'43.8"N 128°30'07.4"E	-	RNAV 1	-
004	TF	OPEDA	-	291(282.1)	44.3	-	+8 000	-	35°51'48.5"N 127°36'52.0"E	-	RNAV 1	-

RNAV IGDOK 1D

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	DOVUR	-	13L-134(124.9) 13R-133(124.2)	6.0	-	-	-250	35°49'48.9"N 128°46'21.9"E	-	RNAV 1	-
002	TF	TN131	-	215(206.3)	10.0	-	+6 000	-	35°40'50.1"N 128°40'55.5"E	-	RNAV 1	-
003	TF	PEDVA	-	273(264.6)	27.0	-	+6 000	-	35°38'13.0"N 128°07'54.2"E	-	RNAV 1	-
004	TF	IGDOK	-	254(245.1)	16.9	-	+6 000	-	35°31'03.6"N 127°49'06.6"E	-	RNAV 1	-

Change : Information of standard instrument departure procedure for RWY 13L/R.

DAEGU/Daegu INTL(RKTN)
RWY 13L/R
RNAV BITUX 1D RNAV OPEDA 1D
RNAV IGDOK 1D RNAV MASTA 1D
RNAV KALOD 1D RNAV LAPAL 1D

AERONAUTICAL DATA TABULATION

Standard Instrument Departure Procedure Coding Tables

RNAV MASTA 1D

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	DOVUR	-	13L-134(124.9) 13R-133(124.2)	6.0	-	-	-250	35°49'48.9"N 128°46'21.9"E	-	RNAV 1	-
002	TF	TN131	-	215(206.3)	10.0	-	+6 000	-	35°40'50.1"N 128°40'55.5"E	-	RNAV 1	-
003	TF	MASTA	-	215(206.3)	13.4	-	+6 000	-	35°28'47.0"N 128°33'39.6"E	-	RNAV 1	-

RNAV KALOD 1D

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	DOVUR	-	13L-134(124.9) 13R-133(124.2)	6.0	-	-	-250	35°49'48.9"N 128°46'21.9"E	-	RNAV 1	-
002	TF	KALOD	-	188(179.8)	19.6	-	-	-	35°30'12.1"N 128°46'26.5"E	-	RNAV 1	-

RNAV LAPAL 1D

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	DOVUR	-	13L-134(124.9) 13R-133(124.2)	6.0	-	-	-250	35°49'48.9"N 128°46'21.9"E	-	RNAV 1	-
002	TF	LAPAL	-	082(073.6)	15.7	-	-	-	35°54'12.6"N 129°04'52.0"E	-	RNAV 1	-

Change : Information of standard instrument departure procedure for RWY 13L/R.

INTENTIONALLY

LEFT

BLANK


STANDARD DEPARTURE CHART INSTRUMENT (SID) - ICAO

Note : Departure under ICAO Flight Procedures.

TRANSITION ALT 14 000
TRANSITION LVL FL 140

DAEGU	DEP	135.9
DAEGU	TWR	126.2

DAEGU/Daegu Intl(RKTN)
RWY 31L/R
RNAV BITUX 1K RNAV OPEDA 1K
RNAV IGDOK 1K RNAV MASTA 1K
RNAV KALOD 1K RNAV LAPAL 1K

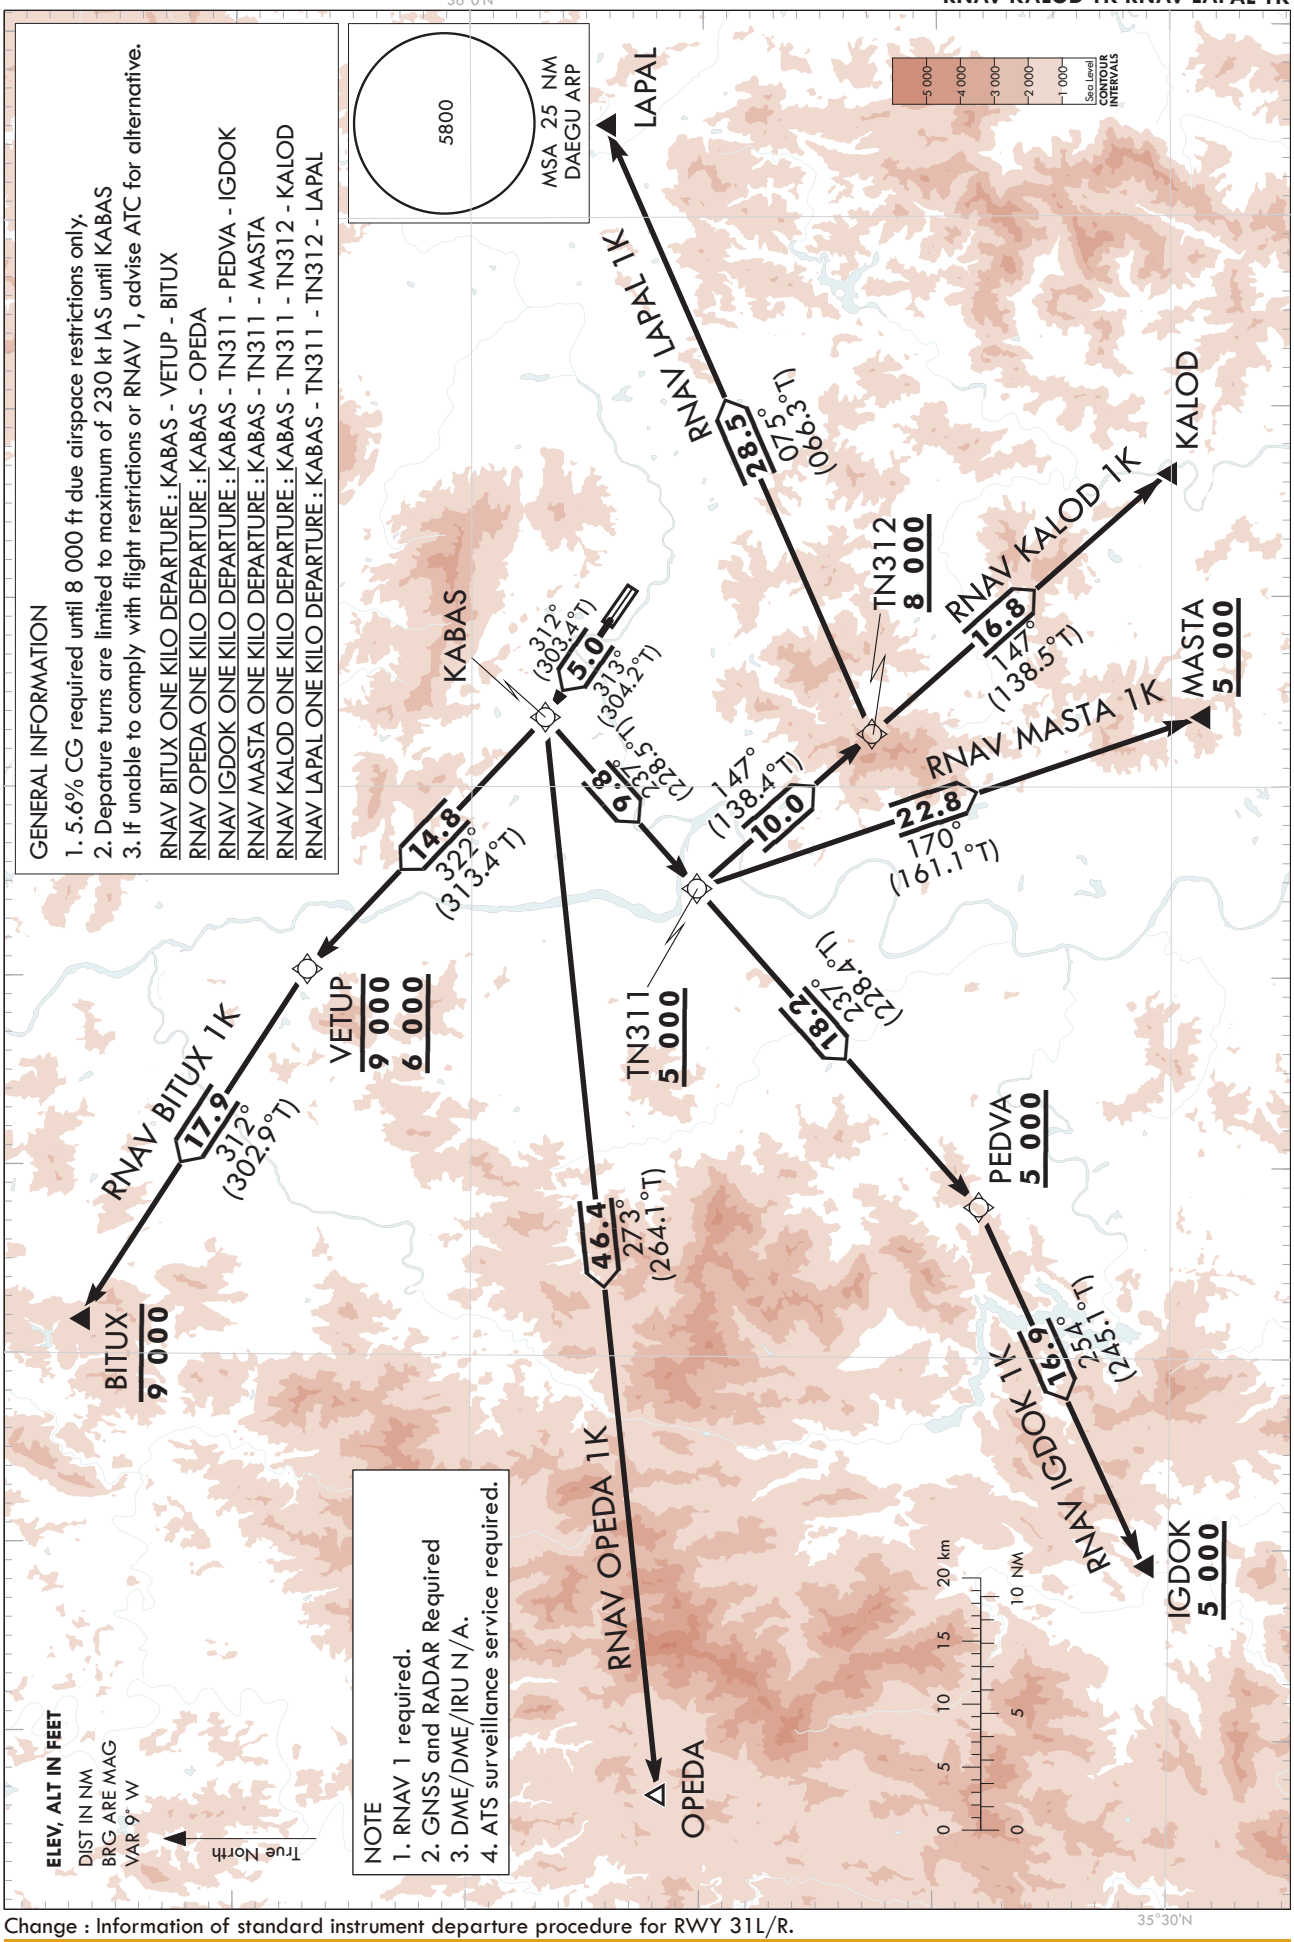

Change : Information of standard instrument departure procedure for RWY 31L/R.

Standard Instrument Departure Procedure Coding Tables

RNAV BITUX 1K

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	KABAS	-	31L-313(304.2) 31R-312(303.4)	5.0	-	-	-230	35°56'51.0"N 128°33'39.5"E	-	RNAV 1	-
002	TF	VETUP	-	322(313.4)	14.8	-	-9 000 +6 000	-	36°07'02.7"N 128°20'21.4"E	-	RNAV 1	-
003	TF	BITUX	-	312(302.9)	17.9	-	-9 000	-	36°16'44.9"N 128°01'47.9"E	-	RNAV 1	-

RNAV OPEDA 1K

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	KABAS	-	31L-313(304.2) 31R-312(303.4)	5.0	-	-	-230	35°56'51.0"N 128°33'39.5"E	-	RNAV 1	-
002	TF	OPEDA	-	273(264.1)	46.4	-	-	-	35°51'48.5"N 127°36'52.0"E	-	RNAV 1	-

RNAV IGDOK 1K

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	KABAS	-	31L-313(304.2) 31R-312(303.4)	5.0	-	-	-230	35°56'51.0"N 128°33'39.5"E	-	RNAV 1	-
002	TF	TN311	-	237(228.5)	9.8	-	+5 000	-	35°50'20.7"N 128°24'37.8"E	-	RNAV 1	-
003	TF	PEDVA	-	237(228.4)	18.2	-	+5 000	-	35°38'13.0"N 128°07'54.2"E	-	RNAV 1	-
004	TF	IGDOK	-	254(245.1)	16.9	-	+5 000	-	35°31'03.6"N 127°49'06.6"E	-	RNAV 1	-

RNAV MASTA 1K

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	KABAS	-	31L-313(304.2) 31R-312(303.4)	5.0	-	-	-230	35°56'51.0"N 128°33'39.5"E	-	RNAV 1	-
002	TF	TN311	-	237(228.5)	9.8	-	+5 000	-	35°50'20.7"N 128°24'37.8"E	-	RNAV 1	-
003	TF	MASTA	-	170(161.1)	22.8	-	+5 000	-	35°28'47.0"N 128°33'39.6"E	-	RNAV 1	-

Change : Information of standard instrument departure procedure for RWY 31L/R.

DAEGU/Daegu INTL(RKTN)
RWY 31L/R
RNAV BITUX 1K RNAV OPEDA 1K
RNAV IGDOK 1K RNAV MASTA 1K
RNAV KALOD 1K RNAV LAPAL 1K

AERONAUTICAL DATA TABULATION

Standard Instrument Departure Procedure Coding Tables

RNAV KALOD 1K

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course°M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	KABAS	-	31L-313(304.2) 31R-312(303.4)	5.0	-	-	-230	35°56'51.0"N 128°33'39.5"E	-	RNAV 1	-
002	TF	TN311	-	237(228.5)	9.8	-	+5 000	-	35°50'20.7"N 128°24'37.8"E	-	RNAV 1	-
003	TF	TN312	-	147(138.4)	10.0	-	+8 000	-	35°42'50.9"N 128°32'46.7"E	-	RNAV 1	-
004	TF	KALOD	-	147(138.5)	16.8	-	+8 000	-	35°30'12.1"N 128°46'26.5"E	-	RNAV 1	-

RNAV LAPAL 1K

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course°M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	KABAS	-	31L-313(304.2) 31R-312(303.4)	5.0	-	-	-230	35°56'51.0"N 128°33'39.5"E	-	RNAV 1	-
002	TF	TN311	-	237(228.5)	9.8	-	+5 000	-	35°50'20.7"N 128°24'37.8"E	-	RNAV 1	-
003	TF	TN312	-	147(138.4)	10.0	-	+8 000	-	35°42'50.9"N 128°32'46.7"E	-	RNAV 1	-
004	TF	LAPAL	-	075(066.3)	28.5	-	+8 000	-	35°54'12.6"N 129°04'52.0"E	-	RNAV 1	-

Change : Information of standard instrument departure procedure for RWY 31L/R.

INTENTIONALLY

LEFT

BLANK