INSTRUMENT APPROACH CHART - ICAO


AERODROME ELEV **192** ft
HEIGHTS RELATED TO
THR RWY 06L - ELEV **167** ft

JUNGWON	APP	134.0
CHEONGJU	GCA	134.4 134.1
CHEONGJU	TWR	118.7 126.2

CHEONGJU/Cheongju Intl(RKTU)


ILS Z or LOC Z RWY 06L

Note : Approach under ICAO Flight Procedures.

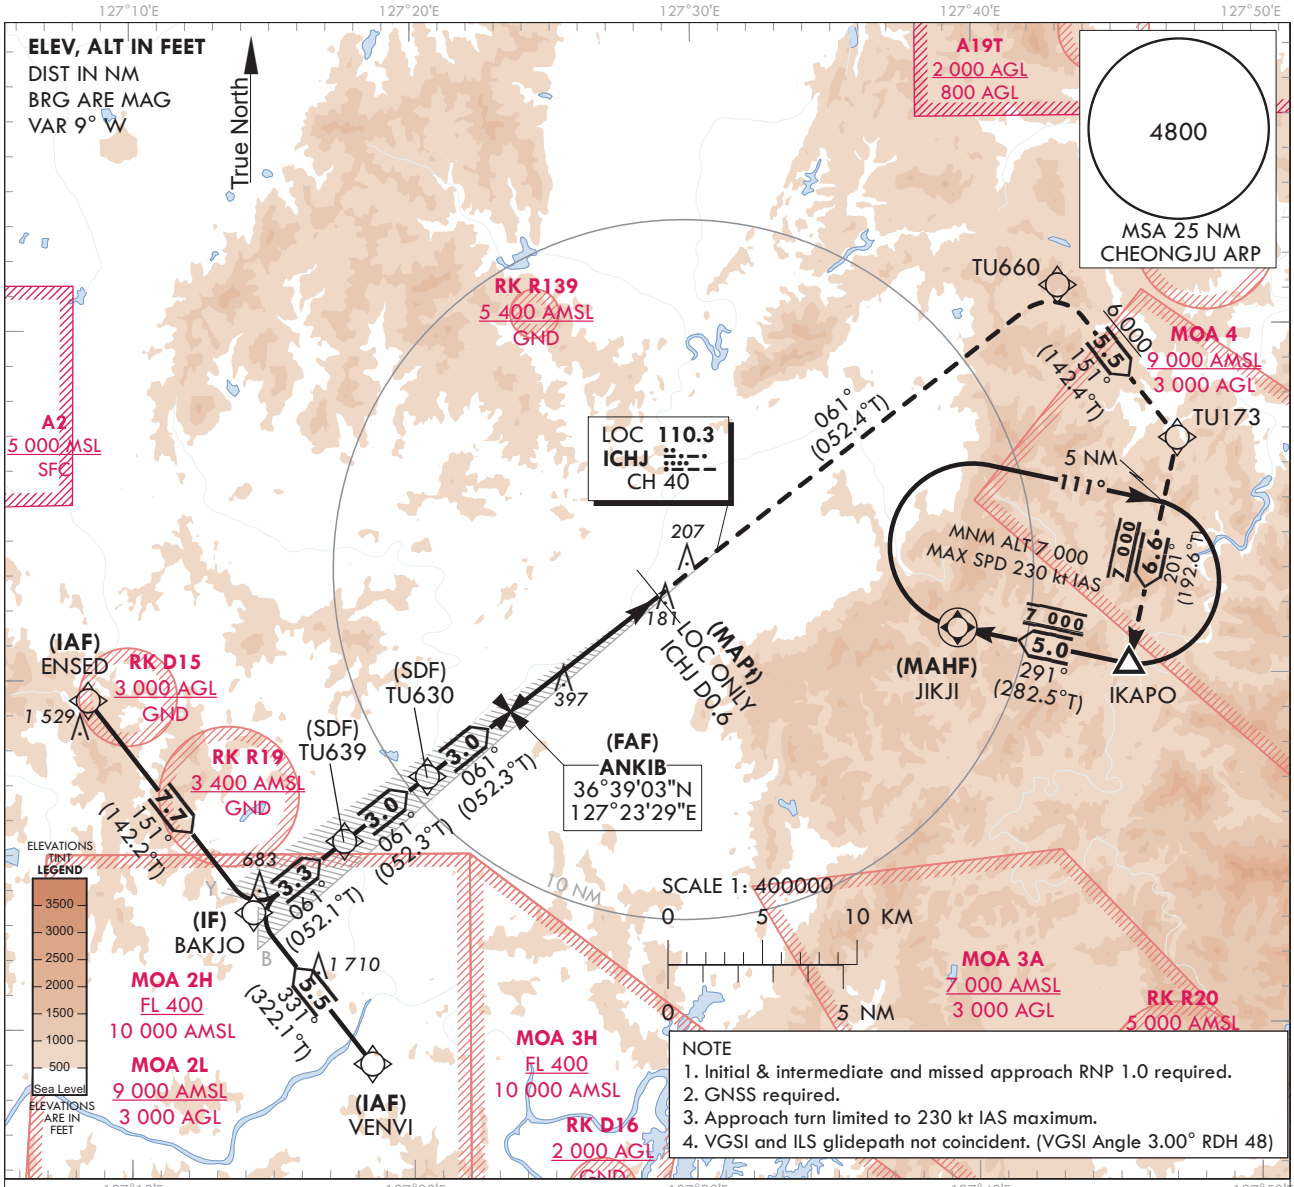

RECOMMENDED PROFILE (LOC ONLY)	DME ICHJ	5	4	3	2
Final Approach Gradient 5.33%, 324 ft/NM	ALT(HGT)	1 785 (1 618)	1 461 (1 294)	1 137 (970)	813 (646)

MISSED APPROACH
Climb to 7 000 ft via on track 061° to TU660, then track 151° to cross TU173 at or above 6 000 ft, then track 201° to IKAPO, then track 291° to JIKJI and hold.

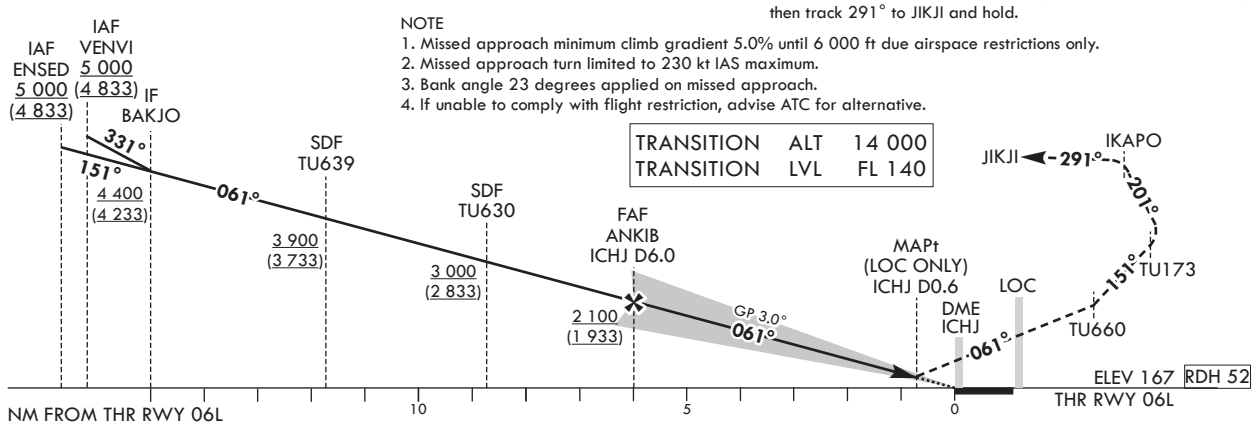

OCA (H)		A	B	C	D		Knots	60	90	120	150	180
Straight-in Approach	CAT-I	367 (200)				Rate of descent	V/V fpm	318	478	637	796	955
	LOC	730 (563)				* Timing Not authorized for defining MAPt. * Circling Not authorized.						

Change : Improved clarity such as terrain.

CHEONGJU/Cheongju Intl(RKTU)
ILS Z or LOC Z RWY 06L

AERONAUTICAL DATA TABULATION

ILS/LOC Approach to RWY 06L from ENSED to BAKJO(IF)	
Fix/Point	Coordinates
ENSED(IAF)	36°39'25.0"N 127°08'29.0"E
BAKJO(IF)	36°33'20.1"N 127°14'19.5"E

ILS/LOC Approach to RWY 06L from VENVI to BAKJO(IF)	
Fix/Point	Coordinates
VENVI(IAF)	36°28'59.3"N 127°18'30.9"E
BAKJO(IF)	36°33'20.1"N 127°14'19.5"E

ILS/LOC Approach to RWY 06L from BAKJO(IF) to MAHF		
Fix/Point		Coordinates
TU639(SDF)		36°35'21.9"N 127°17'33.6"E
TU630(SDF)		36°37'12.1"N 127°20'30.5"E
ANKIB(FAF)	BRG 61.15°/5.98 NM ICHJ	36°39'03.0"N 127°23'28.9"E
ICHJ D0.6(MAPt LOC ONLY)	BRG 61.20°/0.60 NM ICHJ	36°42'20.3"N 127°28'46.9"E
RWY 06L THR		36°42'36.12"N 127°29'12.42"E
DME ICHJ		36°42'39.7"N 127°29'24.5"E
TU660		36°51'08.3"N 127°43'01.8"E
TU173		36°46'44.7"N 127°47'14.2"E
IKAPO		36°40'16.6"N 127°45'26.2"E
JIKJI(MAHF)		36°41'21.7"N 127°39'22.1"E

Change : Information of coordinates for DME ICHJ.

INSTRUMENT APPROACH CHART - ICAO


AERODROME ELEV 192 ft
HEIGHTS RELATED TO
THR RWY 06L - ELEV **167** ft

JUNGWON	APP	134.0	
CHEONGJU	GCA	134.4	134.1
CHEONGJU	TWR	118.7	126.2

CHEONGJU/Cheongju Intl(RKTU)

RNP RWY 06L


Note : Approach under ICAO Flight Procedures.

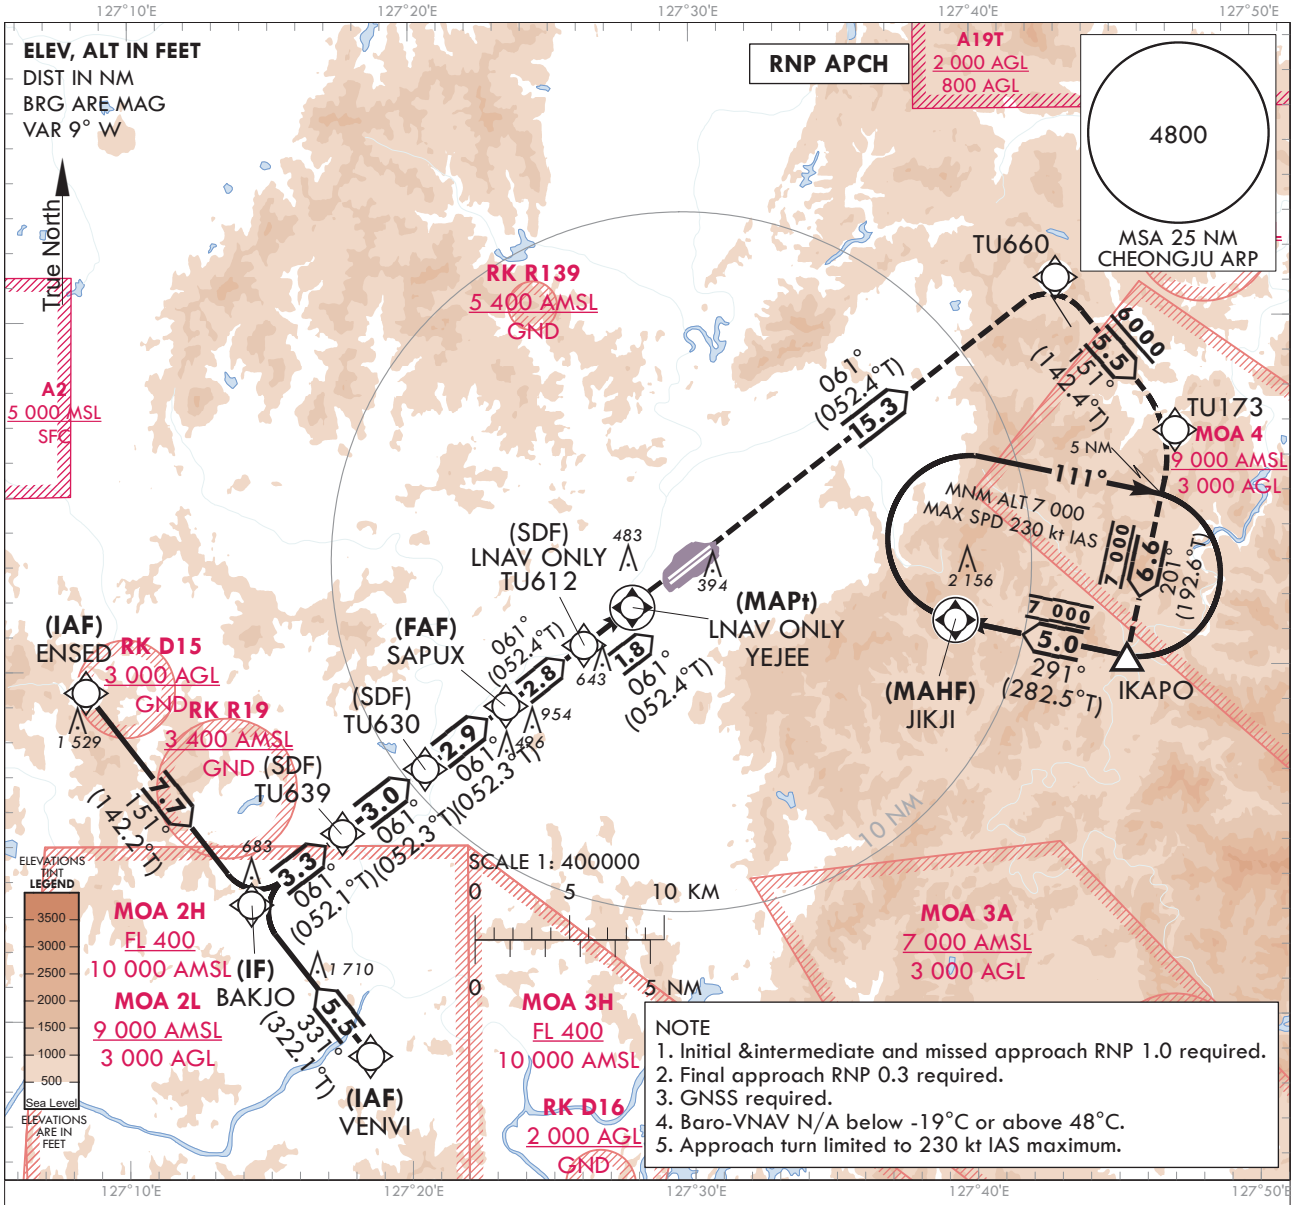

TRANSITION	ALT	14 000
TRANSITION	LVL	FL 140

MISSED APPROACH
Climb to 7 000 ft via on track 061° to TU660, then track 151° to cross TU173 at or above 6 000 ft, then track 201° to IKAPO, then track 291° to JIKJI and hold.

NOTE
1. Missed approach minimum climb gradient 5.0% until 6 000 ft due airspace restrictions only.
2. Missed approach turn limited to 230 kt IAS maximum.
3. Bank angle 23 degrees applied on missed approach.
4. If unable to comply with flight restriction, advise ATC for alternative.

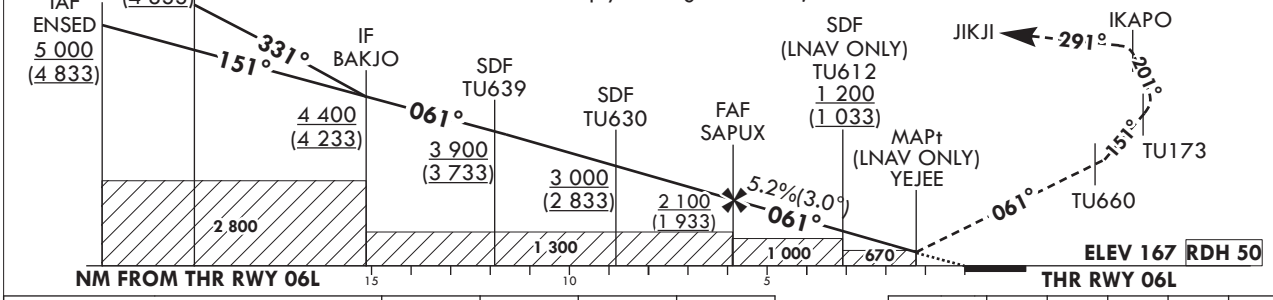

OCA (H)		A	B	C	D		Knots	60	90	120	150	180
Straight-in Approach	LNAV/VNAV	513 (346)				Rate of descent	V/V fpm	318	478	637	796	955
	LNAV	670 (503)				* Timing Not authorized for defining MAPt. * Circling Not authorized.						

Change : Improved clarity such as terrain.

Instrument Approach Procedure Coding Tables

RNP RWY 06L - via ENSED(IAF) to BAKJO(IF)

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	ENSED	-	-	-	-	+5 000	-230	36°39'25.0"N 127°08'29.0"E	-	RNP APCH	IAF
002	TF	BAKJO	-	151(142.2)	7.7	-	+4 400	-230	36°33'20.1"N 127°14'19.5"E	-	RNP APCH	IF

RNP RWY 06L - via VENVI(IAF) to BAKJO(IF)

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	VENVI	-	-	-	-	+5 000	-230	36°28'59.3"N 127°18'30.9"E	-	RNP APCH	IAF
002	TF	BAKJO	-	331(322.1)	5.5	-	+4 400	-230	36°33'20.1"N 127°14'19.5"E	-	RNP APCH	IF

RNP RWY 06L - via BAKJO(IF) to JIKJI(MAHF)

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	TF	BAKJO	-	-	-	-	+4 400	-230	36°33'20.1"N 127°14'19.5"E	-	RNP APCH	IF
002	TF	TU639	-	061(052.1)	3.3	-	+3 900	-230	36°35'21.9"N 127°17'33.6"E	-	RNP APCH	SDF
003	TF	TU630	-	061(052.3)	3.0	-	+3 000	-230	36°37'12.1"N 127°20'30.5"E	-	RNP APCH	SDF
004	TF	SAPUX	-	061(052.3)	2.9	-	+2 100	-	36°38'59.3"N 127°23'22.9"E	-	RNP APCH	FAF
005	TF	TU612	-	061(052.4)	2.8	-	+1 200	-	36°40'42.9"N 127°26'09.9"E	-	RNP APCH	SDF
006	TF	YEJEE	Y	061(052.4)	1.8	-	+670	-	36°41'47.4"N 127°27'53.8"E	-3.00/50	RNP APCH	MAPt
007	TF	TU660	-	061(052.4)	15.3	-	-	-230	36°51'08.3"N 127°43'01.8"E	-	RNP APCH	-
008	TF	TU173	-	151(142.4)	5.5	-	+6 000	-230	36°46'44.7"N 127°47'14.2"E	-	RNP APCH	-
009	TF	IKAPO	-	201(192.6)	6.6	-	@7 000	-230	36°40'16.6"N 127°45'26.2"E	-	RNP APCH	-
010	TF	JIKJI	-	291(282.5)	5.0	-	@7 000	-230	36°41'21.7"N 127°39'22.1"E	-	RNP APCH	-
011	HM	JIKJI	Y	291(282.5)	5.0	R	+7 000	-230	36°41'21.7"N 127°39'22.1"E	-	RNP APCH	-

INSTRUMENT APPROACH CHART - ICAO


AERODROME ELEV **192** ft
HEIGHTS RELATED TO
THR RWY 06R - ELEV **171** ft

JUNGWON	APP	134.0
CHEONGJU	GCA	134.4 134.1
CHEONGJU	TWR	118.7 126.2

CHEONGJU/Cheongju Intl(RKTU)

ILS Z or LOC Z RWY 06R


Note : Approach under ICAO Flight Procedures.

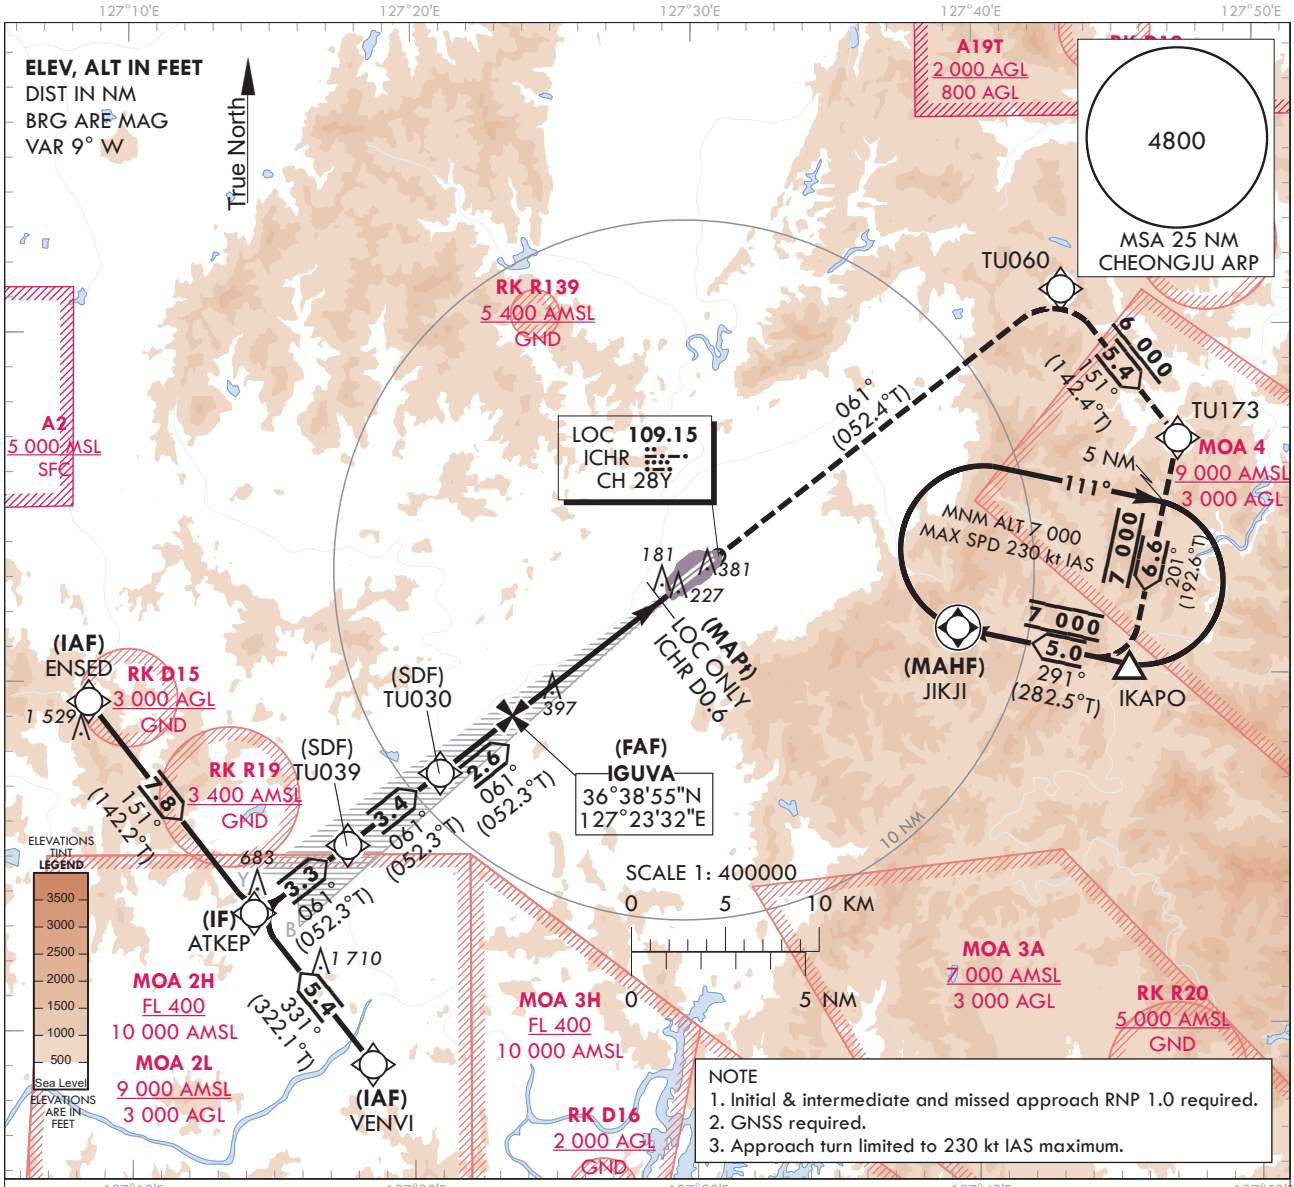

RECOMMENDED PROFILE (LOC ONLY)	DME ICHR	5	4	3	2
Final Approach Gradient 5.33%, 324 ft/NM	ALT(HGT)	1 790 (1 619)	1 466 (1 295)	1 142 (971)	818 (647)

MISSED APPROACH
Climb to 7 000 ft via on track 061° to TU060, then track 151° to cross TU173 at or above 6 000 ft, then track 201° to IKAPO, then track 291° to JIKJI and hold.

NOTE
1. Missed approach minimum climb gradient 5.0% until 6 000 ft due airspace restrictions only.
2. Missed approach turn limited to 230 kt IAS maximum.
3. Bank angle 23 degrees applied on missed approach.
4. If unable to comply with flight restriction, advise ATC for alternative.

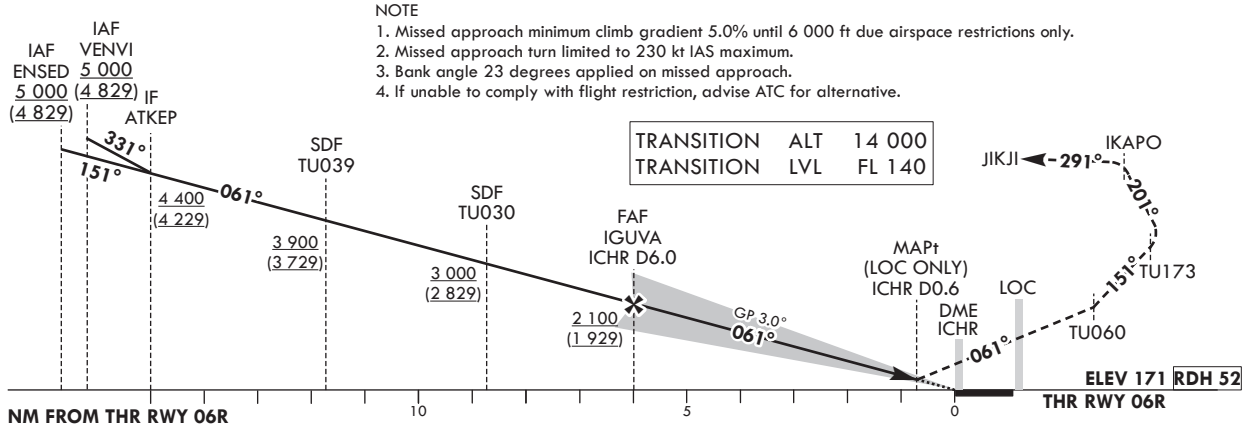

OCA (H)		A	B	C	D		Knots	60	90	120	150	180
Straight-in Approach	CAT-I	371 (200)				Rate of descent	V/V fpm	318	478	637	796	955
	LOC	730 (559)				* Timing Not authorized for defining MAPt. * Circling Not authorized.						

Change : Improved clarity such as terrain.

CHEONGJU/Cheongju Intl(RKTU)
ILS Z or LOC Z RWY 06R

AERONAUTICAL DATA TABULATION

ILS/LOC Approach to RWY 06R from ENSED to ATKEP(IF)	
Fix/Point	Coordinates
ENSED(IAF)	36°39'25.0"N 127°08'29.0"E
ATKEP(IF)	36°33'14.7"N 127°14'24.7"E

ILS/LOC Approach to RWY 06R from VENVI to ATKEP(IF)	
Fix/Point	Coordinates
VENVI(IAF)	36°28'59.3"N 127°18'30.9"E
ATKEP(IF)	36°33'14.7"N 127°14'24.7"E

ILS/LOC Approach to RWY 06R from ATKEP(IF) to MAHF		
Fix/Point		Coordinates
TU039(SDF)		36°35'16.0"N 127°17'39.2"E
TU030(SDF)		36°37'19.1"N 127°20'56.9"E
IGUVA(FAF)	BRG 61.15°/5.96 NM ICHR	36°38'55.5"N 127°23'31.9"E
ICHR D0.6(MAPt LOC ONLY)	BRG 61.20°/0.60 NM ICHR	36°42'12.3"N 127°28'49.1"E
RWY 06R THR		36°42'28.26"N 127°29'14.84"E
DME ICHR		36°42'31.7"N 127°29'26.8"E
TU060		36°51'02.4"N 127°43'07.5"E
TU173		36°46'44.7"N 127°47'14.2"E
IKAPO		36°40'16.6"N 127°45'26.2"E
JIKJI(MAHF)		36°41'21.7"N 127°39'22.1"E

INSTRUMENT APPROACH CHART - ICAO


AERODROME ELEV **192** ft
HEIGHTS RELATED TO
THR RWY 24L - ELEV **191** ft

JUNGWON	APP	134.0
CHEONGJU	GCA	134.4 134.1
CHEONGJU	TWR	118.7 126.2

CHEONGJU/Cheongju Intl(RKTU)

RNP RWY 24L


Note : Approach under ICAO Flight Procedures.

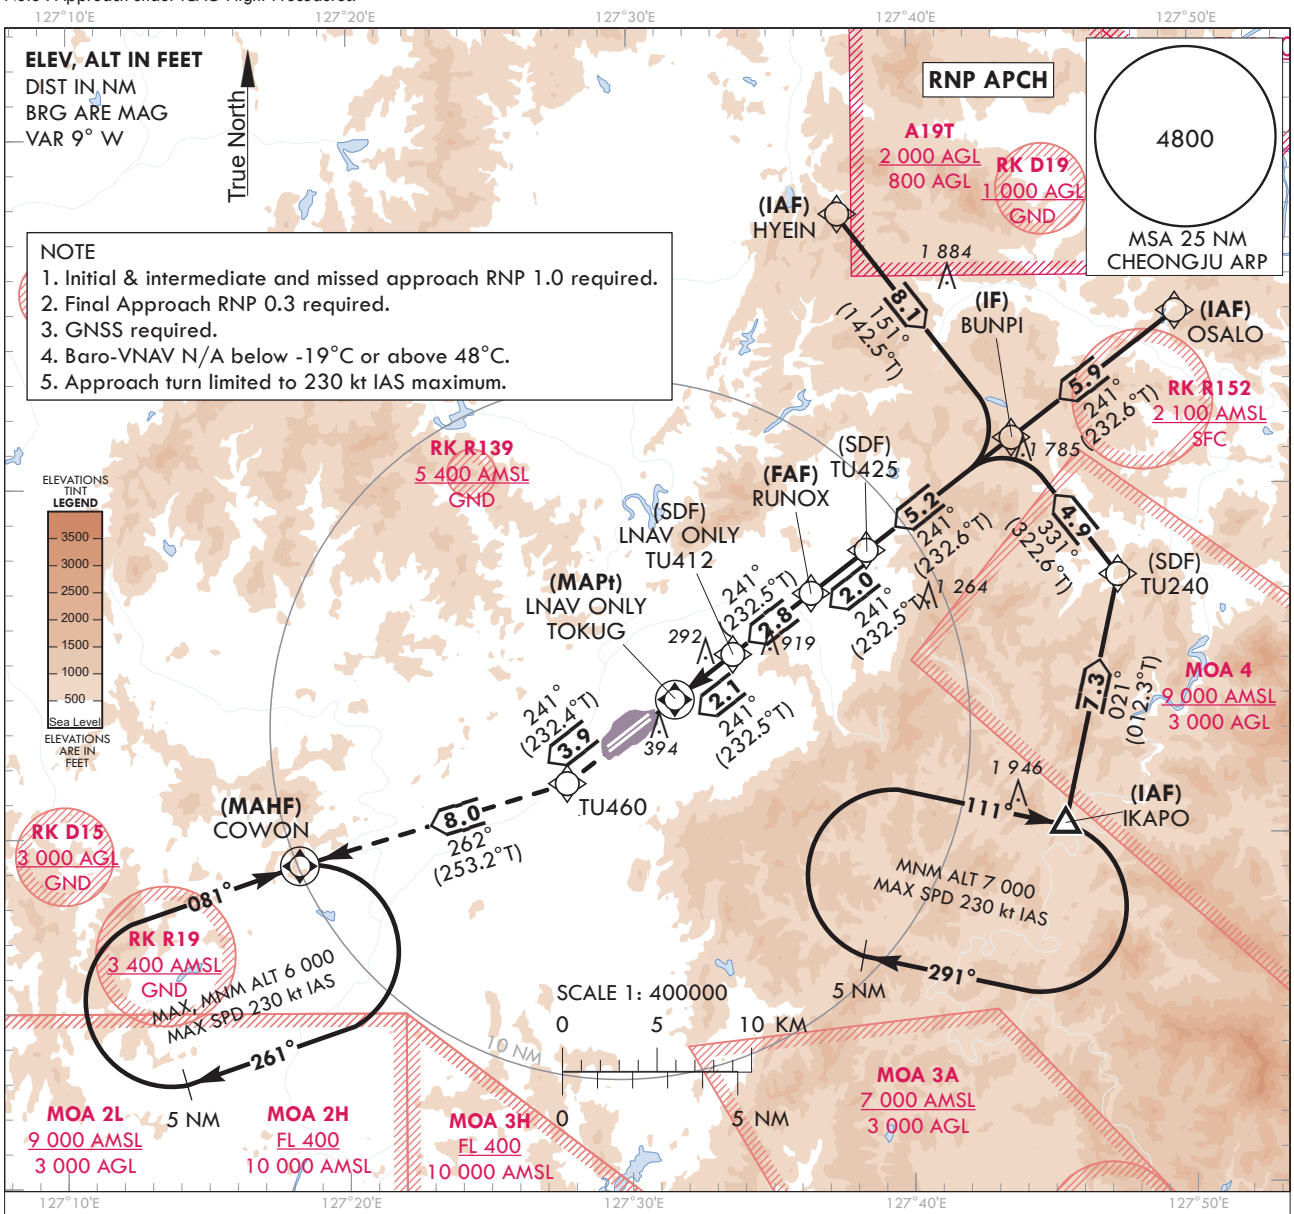

MISSED APPROACH
Climb to 6 000 ft via on track 241° to TU460, then track 262° to COWON, then continue climb to 6 000 ft and hold.

NOTE
1. Missed approach minimum climb gradient 6.0% until COWON due airspace restrictions only.
2. Missed approach turn limited to 230 kt IAS maximum.
3. If unable to comply with flight restriction, advise ATC for alternative.

TRANSITION	ALT	14 000
TRANSITION	LVL	FL 140

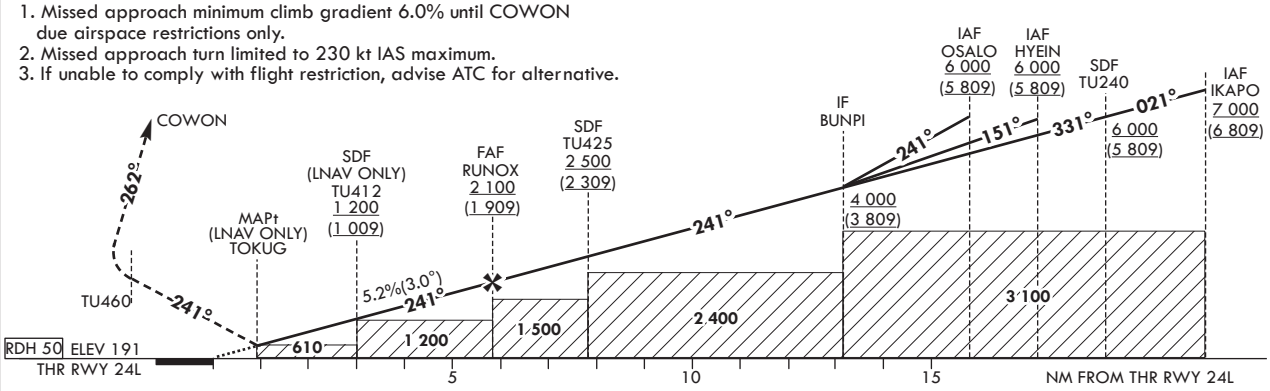

OCA (H)		A	B	C	D
Straight-in Approach	LNAV/VNAV	570 (379)			
	LNAV	610 (418)			

Rate of descent	Knots	60	90	120	150	180
	V/V fpm	318	478	637	796	955

* Timing Not authorized for defining MAPt.
* Circling Not authorized.
* OCH for LNAV related to aerodrome ELEV 192 ft.
* CAUTION : Missed APCH CG(6.0%) greater than ICAO standard(5.0%).

Change : Improved clarity such as terrain.

Instrument Approach Procedure Coding Tables

RNP RWY 24L - via IKAPO(IAF) to BUNPI(IF)

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	IKAPO	-	-	-	-	+7 000	-230	36°40'16.6"N 127°45'26.2"E	-	RNP APCH	IAF
002	TF	TU240	-	021(12.3)	7.3	-	+6 000	-230	36°47'25.1"N 127°47'22.5"E	-	RNP APCH	SDF
003	TF	BUNPI	-	331(322.6)	4.9	-	+4 000	-230	36°51'21.1"N 127°43'37.9"E	-	RNP APCH	IF

RNP RWY 24L - via HYEIN(IAF) to BUNPI(IF)

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	HYEIN	-	-	-	-	+6 000	-230	36°57'47.1"N 127°37'29.7"E	-	RNP APCH	IAF
002	TF	BUNPI	-	151(142.5)	8.1	-	+4 000	-230	36°51'21.1"N 127°43'37.9"E	-	RNP APCH	IF

RNP RWY 24L - via OSALO(IAF) to BUNPI(IF)

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	OSALO	-	-	-	-	+6 000	-230	36°54'56.9"N 127°49'29.3"E	-	RNP APCH	IAF
002	TF	BUNPI	-	241(232.6)	5.9	-	+4 000	-230	36°51'21.1"N 127°43'37.9"E	-	RNP APCH	IF

RNP RWY 24L - via BUNPI(IF) to COWON(MAHF)

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	TF	BUNPI	-	-	-	-	+4 000	-230	36°51'21.1"N 127°43'37.9"E	-	RNP APCH	IF
002	TF	TU425	-	241(232.6)	5.2	-	+2 500	-230	36°48'09.3"N 127°38'26.5"E	-	RNP APCH	SDF
003	TF	RUNOX	-	241(232.5)	2.0	-	+2 100	-	36°46'56.2"N 127°36'28.0"E	-	RNP APCH	FAF
004	TF	TU412	-	241(232.5)	2.8	-	+1 200	-	36°45'12.4"N 127°33'40.0"E	-	RNP APCH	SDF
005	TF	TOKUG	Y	241(232.5)	2.1	-	+610	-	36°43'55.5"N 127°31'35.7"E	-3.00/50	RNP APCH	MAPt
006	TF	TU460	-	241(232.4)	3.9	-	-	-230	36°41'32.6"N 127°27'45.1"E	-	RNP APCH	-
007	TF	COWON	-	262(253.2)	8.0	-	6 000	-230	36°39'13.6"N 127°18'14.5"E	-	RNP APCH	-
008	HM	COWON	Y	081(072.1)	5.0	R	@6 000	-230	36°39'13.6"N 127°18'14.5"E	-	RNP APCH	-

HOLDING PROCEDURE

Holding Identification	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Time (MIN)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
RNP RWY 24L	HM	IKAPO	Y	111(102.5)	-	R	+7 000	-230	36°40'16.6"N 127°45'26.2"E	-	RNP 1	5 NM Leg

INSTRUMENT APPROACH CHART - ICAO


AERODROME ELEV **192** ft
HEIGHTS RELATED TO
THR RWY 24R - ELEV **186** ft

JUNGWON	APP	134.0	
CHEONGJU	GCA	134.4	134.1
CHEONGJU	TWR	118.7	126.2

CHEONGJU/Cheongju Intl(RKTU)

ILS Z or LOC Z RWY 24R

Note : Approach under ICAO Flight Procedures.

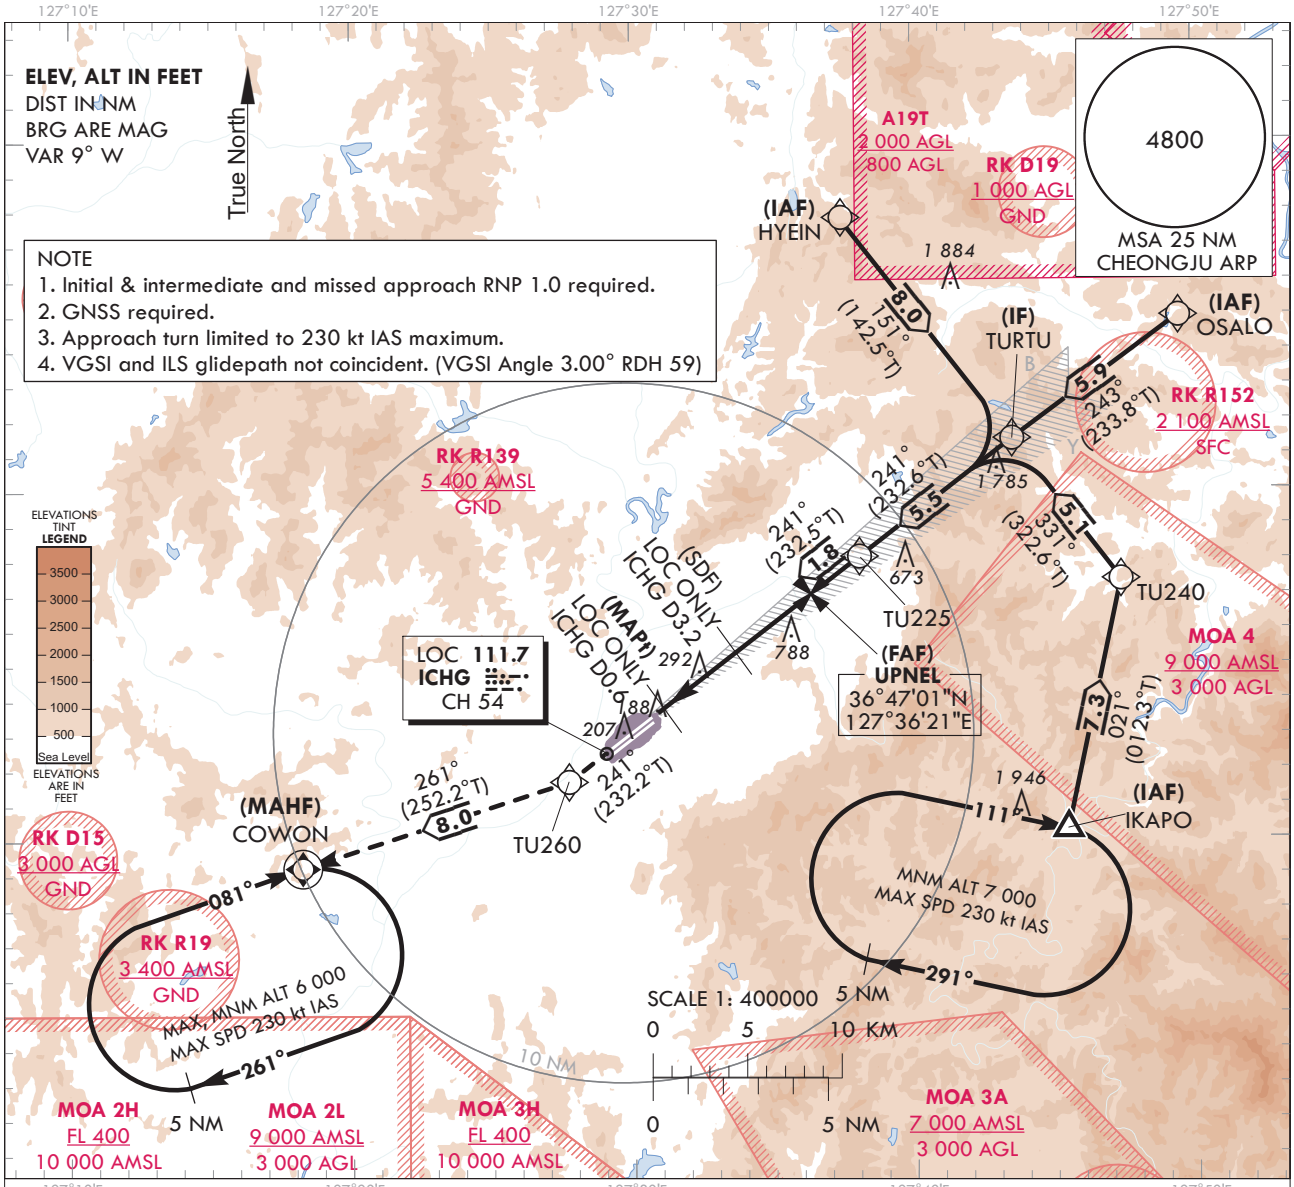


MISSED APPROACH
Climb to 6 000 ft via on track 241° to TU260, then track 261° to COWON, then continue climb to 6 000 ft and hold.

RECOMMENDED PROFILE (LOC ONLY)	DME ICHG	5	4	3	2
Final Approach Gradient 5.47%(324 ft/NM) to SDF, 5.22%(317 ft/NM) to THR	ALT(HGT)	1 984 (1 798)	1 651 (1 465)	1 137 (951)	820 (634)

NOTE
1. Missed approach minimum climb gradient 6.0% until COWON due airspace restrictions only.
2. Missed approach turn limited to 230 kt IAS maximum.
3. If unable to comply with flight restriction, advise ATC for alternative.

TRANSITION	ALT	14 000
TRANSITION	LVL	FL 140

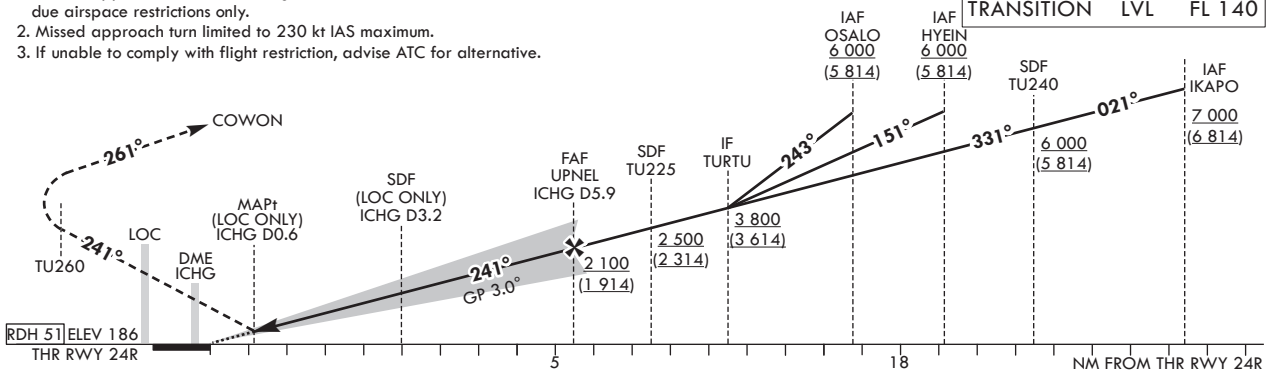

Knots	60	90	120	150	180
Rate of descent V/V fpm	318	478	637	796	955

OCA (H)		A	B	C	D
Straight-in Approach	CAT-I	386 (200)			
	LOC	610 (418)			

* Timing Not authorized for defining MAPt.
* Circling Not authorized.
* OCH for LOC related to aerodrome ELEV 192 ft.
* CAUTION : Missed APCH CG(6.0%) greater than ICAO standard(5.0%).

Change : Improved clarity such as terrain.

CHEONGJU/Cheongju Intl(RKTU)
ILS Z or LOC Z RWY 24R

AERONAUTICAL DATA TABULATION

ILS/LOC Approach to RWY 24R from IKAPO to TURTU(IF)	
Fix/Point	Coordinates
IKAPO(IAF)	36°40'16.6"N 127°45'26.2"E
TU240(SDF)	36°47'25.1"N 127°47'22.5"E
TURTU(IF)	36°51'27.0"N 127°43'32.3"E

ILS/LOC Approach to RWY 24R from OSALO to TURTU(IF)	
Fix/Point	Coordinates
OSALO(IAF)	36°54'56.9"N 127°49'29.3"E
TURTU(IF)	36°51'27.0"N 127°43'32.3"E

ILS/LOC Approach to RWY 24R from HYEIN to TURTU(IF)	
Fix/Point	Coordinates
HYEIN(IAF)	36°57'47.1"N 127°37'29.7"E
TURTU(IF)	36°51'27.0"N 127°43'32.3"E

ILS/LOC Approach to RWY 24R from TURTU(IF) to MAHF		
Fix/Point		Coordinates
TU225(SDF)		36°48'05.3"N 127°38'04.9"E
UPNEL(FAF)	BRG 241.28°/5.92 NM ICHG	36°47'01.2"N 127°36'20.9"E
ICHG D3.2(SDF LOC ONLY)	BRG 241.25°/3.20 NM ICHG	36°45'21.6"N 127°33'39.9"E
ICHG D0.6(MAPt LOC ONLY)	BRG 241.23°/0.60 NM ICHG	36°43'46.3"N 127°31'05.8"E
RWY 24R THR		36°43'30.39"N 127°30'40.04"E
DME ICHG		36°43'27.4"N 127°30'27.6"E
TU260		36°41'40.5"N 127°27'42.6"E
COWON(MAHF)		36°39'13.6"N 127°18'14.5"E

INSTRUMENT APPROACH CHART - ICAO


AERODROME ELEV **192** ft
HEIGHTS RELATED TO
THR RWY 24R - ELEV **186** ft

JUNGWON	APP	134.0	
CHEONGJU	GCA	134.4	134.1
CHEONGJU	TWR	118.7	126.2

CHEONGJU/Cheongju Intl(RKTU)

RNP RWY 24R


Note : Approach under ICAO Flight Procedures.

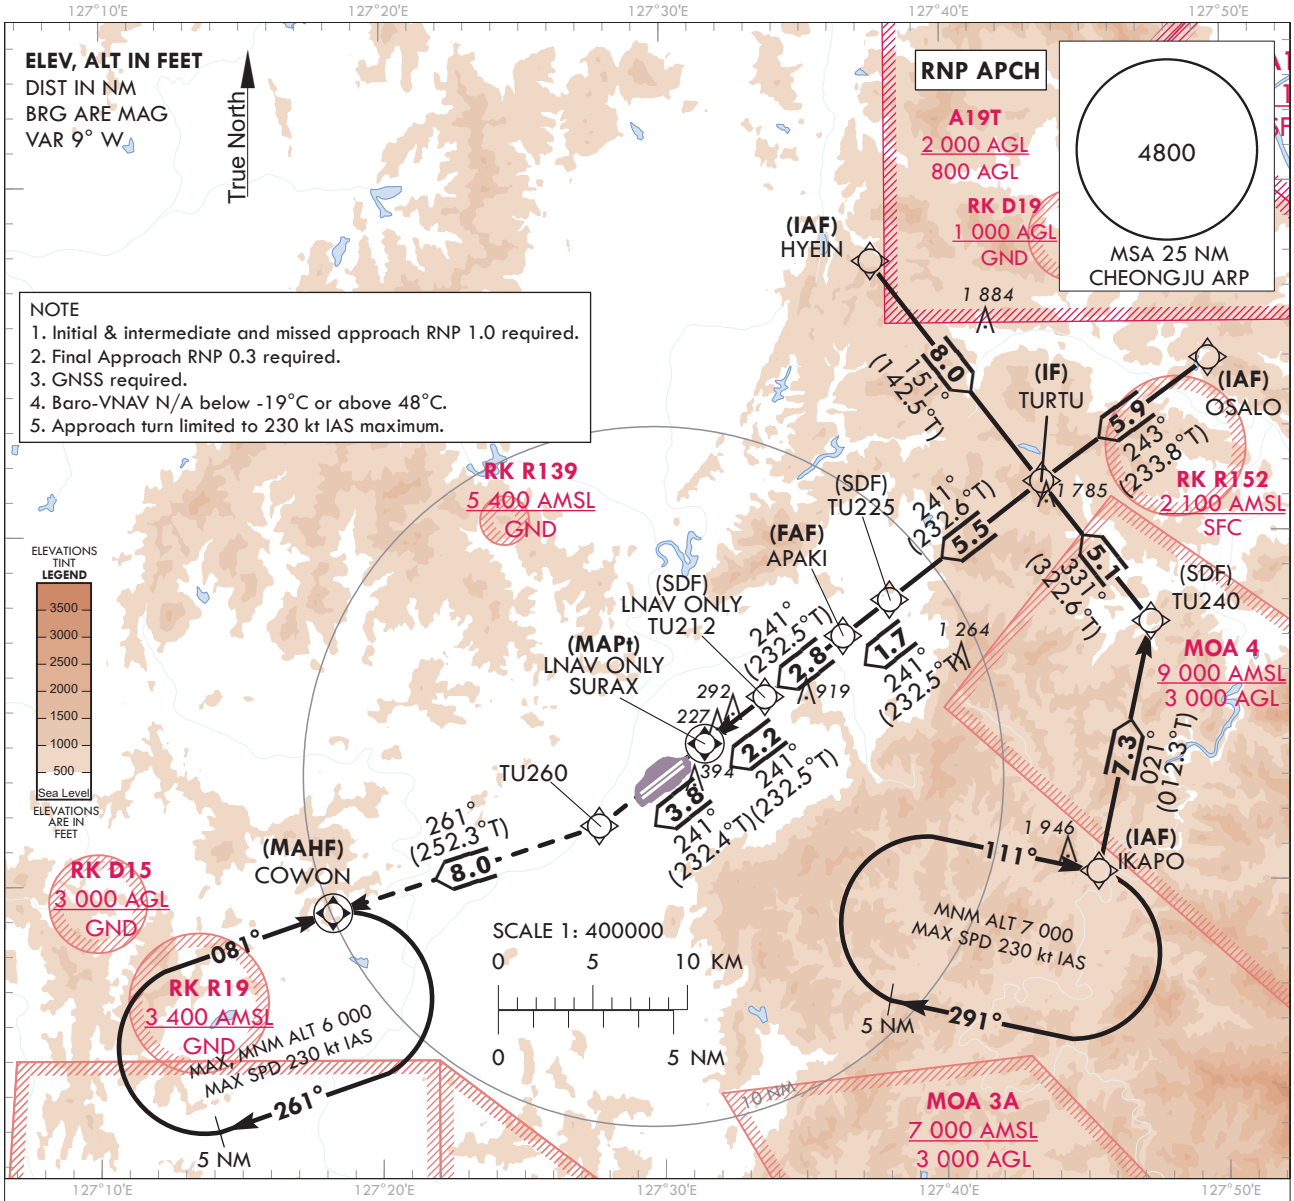

MISSED APPROACH
Climb to 6 000 ft via on track 241° to TU260, then track 261° to COWON, then continue climb to 6 000 ft and hold.

TRANSITION	ALT	14 000
TRANSITION	LVL	FL 140

NOTE
1. Missed approach minimum climb gradient 6.0% until COWON due airspace restrictions only.
2. Missed approach turn limited to 230 kt IAS maximum.
3. If unable to comply with flight restriction, advise ATC for alternative.

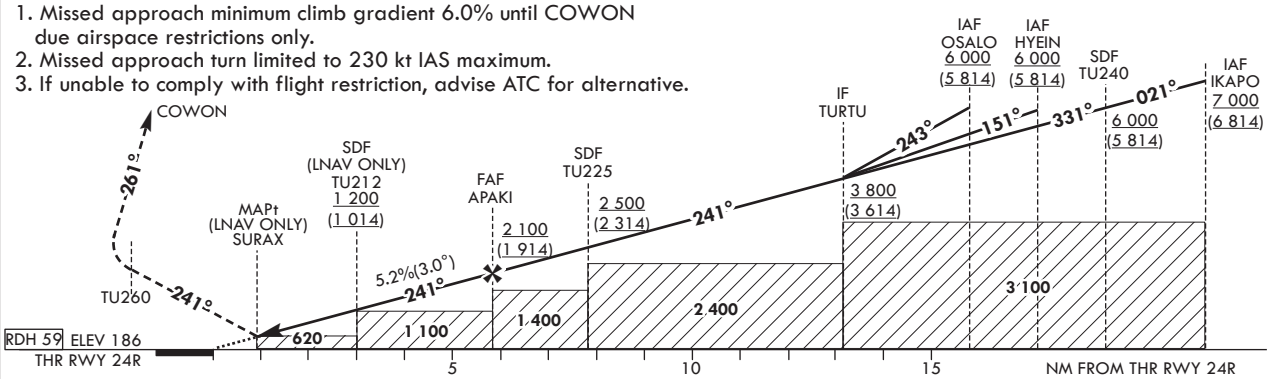

OCA (H)		A	B	C	D
Straight-in Approach	LNAV/VNAV	560 (374)			
	LNAV	620 (428)			

Rate of descent	Knots	60	90	120	150	180
	V/V fpm	318	478	637	796	955

* Timing Not authorized for defining MAPt.
* Circling Not authorized.
* OCH for LNAV related to aerodrome ELEV 192 ft.
* CAUTION : Missed APCH CG(6.0%) greater than ICAO standard(5.0%).

Change : Improved clarity such as terrain.

Instrument Approach Procedure Coding Tables

RNP RWY 24R - via IKAPO to TURTU(IF)

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	IKAPO	-	-	-	-	+7 000	-230	36°40'16.6"N 127°45'26.2"E	-	RNP APCH	IAF
002	TF	TU240	-	021(012.3)	7.3	-	+6 000	-230	36°47'25.1"N 127°47'22.5"E	-	RNP APCH	SDF
003	TF	TURTU	-	331(322.6)	5.1	-	+3 800	-230	36°51'27.0"N 127°43'32.3"E	-	RNP APCH	IF

RNP RWY 24R - via HYEIN to TURTU(IF)

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	HYEIN	-	-	-	-	+6 000	-230	36°57'47.1"N 127°37'29.7"E	-	RNP APCH	IAF
002	TF	TURTU	-	151(142.5)	8.0	-	+3 800	-230	36°51'27.0"N 127°43'32.3"E	-	RNP APCH	IF

RNP RWY 24R - via OSALO to TURTU(IF)

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	OSALO	-	-	-	-	+6 000	-230	36°54'56.9"N 127°49'29.3"E	-	RNP APCH	IAF
002	TF	TURTU	-	243(233.8)	5.9	-	+3 800	-230	36°51'27.0"N 127°43'32.3"E	-	RNP APCH	IF

RNP RWY 24R - via TURTU(IF) to COWON(MAHF)

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	TF	TURTU	-	-	-	-	+3 800	-230	36°51'27.0"N 127°43'32.3"E	-	RNP APCH	IF
002	TF	TU225	-	241(232.6)	5.5	-	+2 500	-230	36°48'05.3"N 127°38'04.9"E	-	RNP APCH	SDF
003	TF	APAKI	-	241(232.5)	1.7	-	+ 2 100	-	36°47'03.7"N 127°36'25.0"E	-	RNP APCH	FAF
004	TF	TU212	-	241(232.5)	2.8	-	+1 200	-	36°45'20.2"N 127°33'37.6"E	-	RNP APCH	SDF
005	TF	SURAX	Y	241(232.5)	2.2	-	+620	-	36°44'00.5"N 127°31'28.6"E	-3.00/59	RNP APCH	MAPt
006	TF	TU260	-	241(232.4)	3.8	-	-	-230	36°41'40.5"N 127°27'42.6"E	-	RNP APCH	-
007	TF	COWON	-	261(252.3)	8.0	-	6 000	-230	36°39'13.6"N 127°18'14.5"E	-	RNP APCH	-
008	HM	COWON	Y	081(072.1)	5.0	R	@6 000	-230	36°39'13.6"N 127°18'14.5"E	-	RNP APCH	-

HOLDING PROCEDURE

Holding Identification	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Time (MIN)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
RNP RWY 24R	HM	IKAPO	Y	111(102.5)	-	R	+7 000	-230	36°40'16.6"N 127°45'26.2"E	-	RNP 1	5 NM Leg