
STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO

Note : Departure under ICAO Flight Procedures.

TRANSITION ALT 14 000
TRANSITION LVL FL 140

JUNGWON DEP 129.65
CHEONGJU TWR 118.7 126.2

CHEONGJU/Cheongju INTL(RKTU)
RWY 06L/R
RNP GUKDO 1D, RNP OLMEN 1D
RNP BULTI 1D, RNP MAKDU 1D
RNP OSPOT 1D

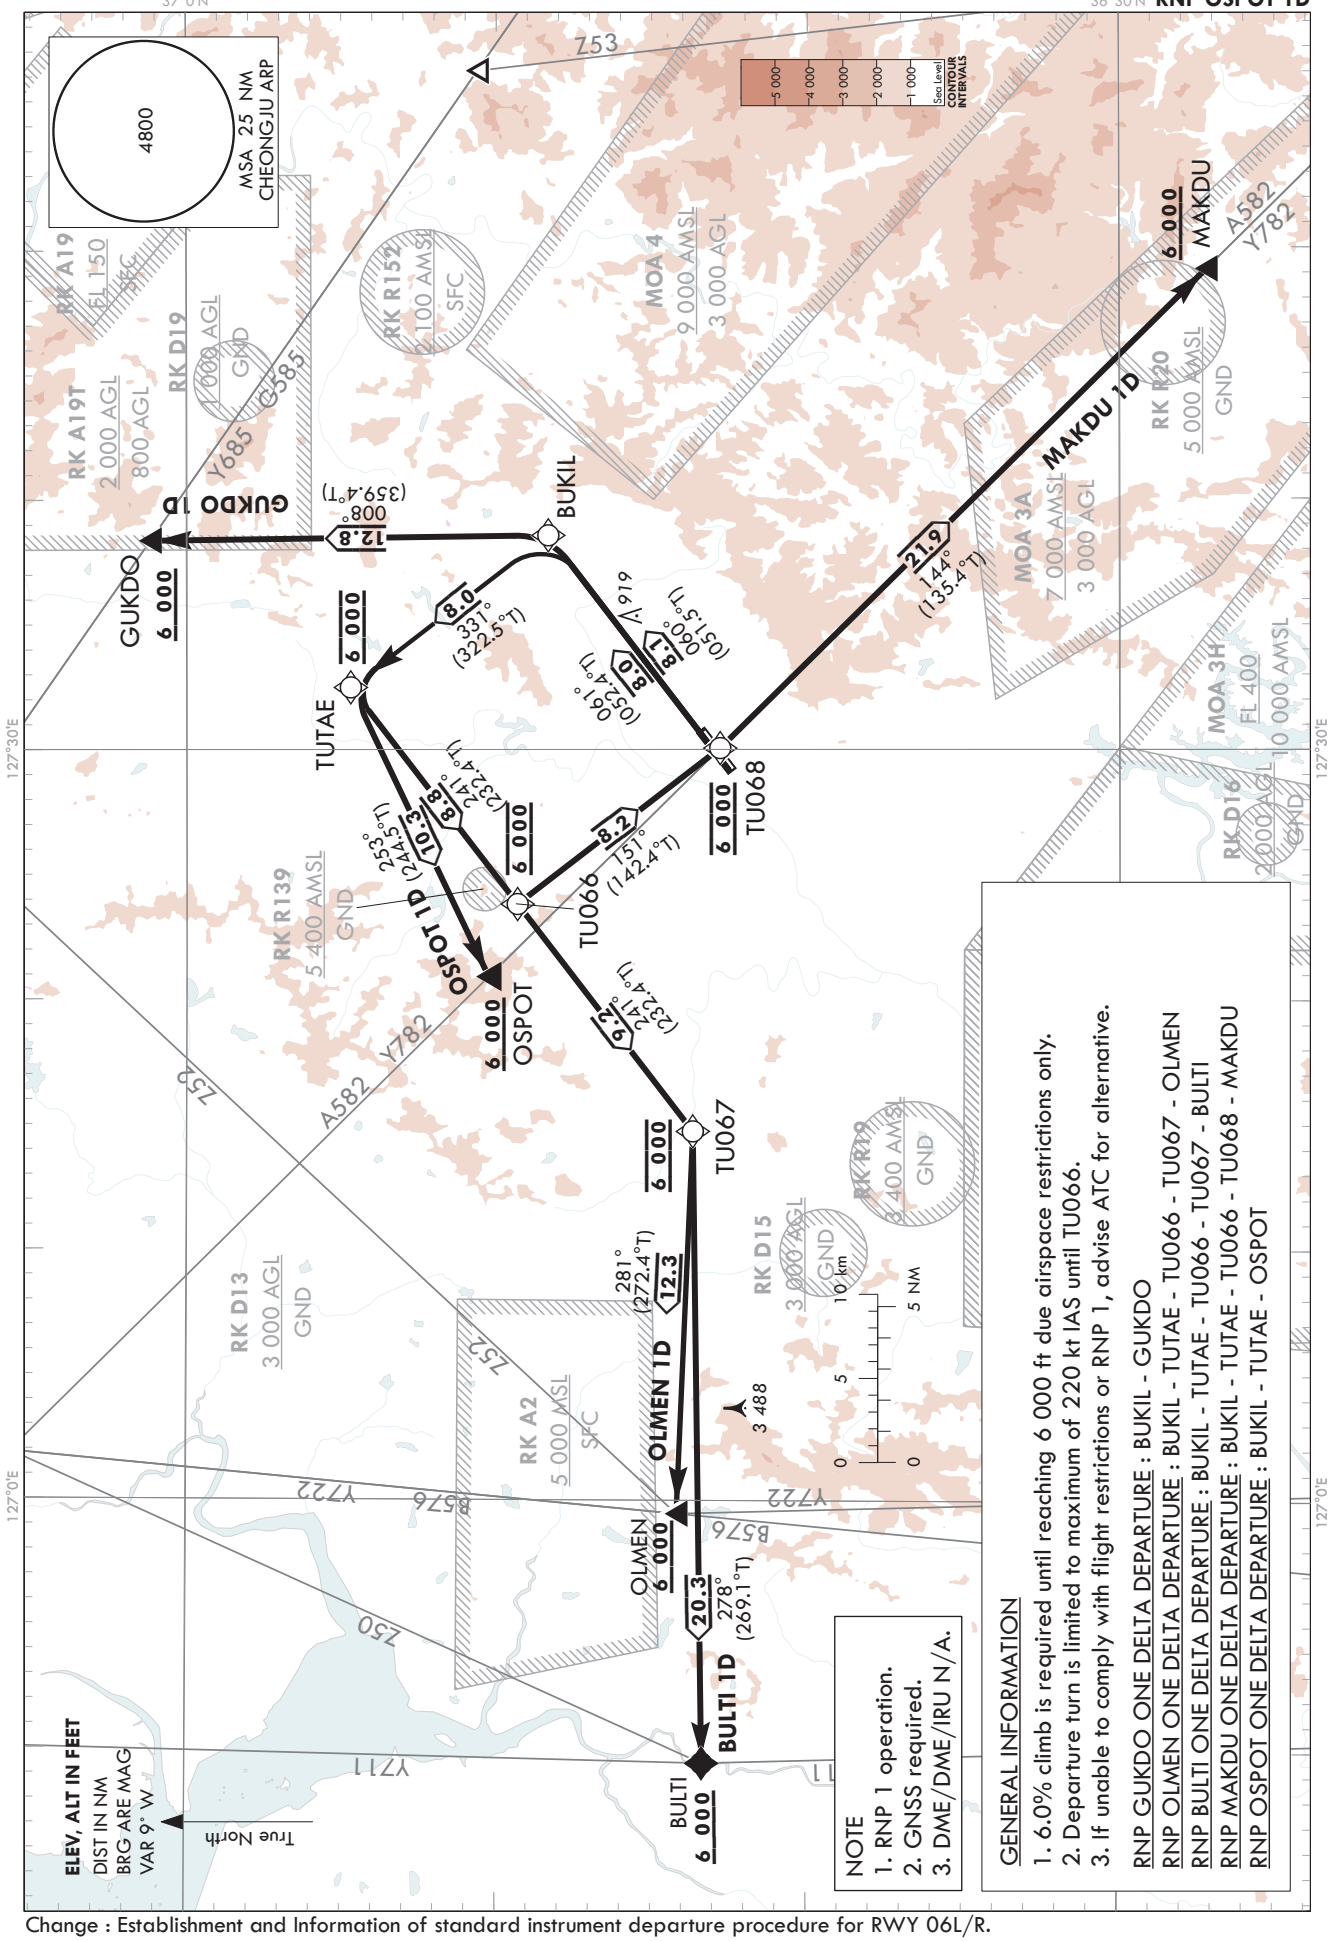

NOTE
1. RNP 1 operation.
2. GNSS required.
3. DME/DME/IRU N/A.

GENERAL INFORMATION
1. 6.0% climb is required until reaching 6 000 ft due airspace restrictions only.
2. Departure turn is limited to maximum of 220 kt IAS until TU066.
3. If unable to comply with flight restrictions or RNP 1, advise ATC for alternative.

RNP GUKDO ONE DELTA DEPARTURE : BUKIL - GUKDO
RNP OLMEN ONE DELTA DEPARTURE : BUKIL - TUTAE - TU066 - TU067 - OLMEN
RNP BULTI ONE DELTA DEPARTURE : BUKIL - TUTAE - TU066 - TU067 - BULTI
RNP MAKDU ONE DELTA DEPARTURE : BUKIL - TUTAE - TU066 - TU068 - MAKDU
RNP OSPOT ONE DELTA DEPARTURE : BUKIL - TUTAE - OSPOT

Change : Establishment and Information of standard instrument departure procedure for RWY 06L/R.

CHEONGJU/Cheongju INTL(RKTU)
RWY 06L/R
RNP GUKDO 1D, RNP OLMEN 1D
RNP BULTI 1D

AERONAUTICAL DATA TABULATION

Standard Instrument Departure Procedure Coding Tables

RNP GUKDO 1D

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	BUKIL	-	06L-061(052.4) 06R-060(051.5)	06L-8.0 06R-8.1	-	-	-220	36°48'23.2"N 127°38'33.7"E	-	RNP 1	-
002	TF	GUKDO	-	008(359.4)	12.8	-	+6 000	-	37°01'10.9"N 127°38'22.9"E	-	RNP 1	-

RNP OLMEN 1D

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	BUKIL	-	06L-061(052.4) 06R-060(051.5)	06L-8.0 06R-8.1	-	-	-220	36°48'23.2"N 127°38'33.7"E	-	RNP 1	-
002	TF	TUTAE	-	331(322.5)	8.0	-	@6 000	-220	36°54'44.4"N 127°32'29.4"E	-	RNP 1	-
003	TF	TU066	-	241(232.4)	8.8	-	@6 000	-220	36°49'22.4"N 127°23'49.1"E	-	RNP 1	-
004	TF	TU067	-	241(232.4)	9.2	-	@6 000	-	36°43'43.8"N 127°14'44.4"E	-	RNP 1	-
005	TF	OLMEN	-	281(272.4)	12.3	-	+6 000	-	36°44'13.4"N 126°59'27.6"E	-	RNP 1	-

RNP BULTI 1D

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	BUKIL	-	06L-061(052.4) 06R-060(051.5)	06L-8.0 06R-8.1	-	-	-220	36°48'23.2"N 127°38'33.7"E	-	RNP 1	-
002	TF	TUTAE	-	331(322.5)	8.0	-	@6 000	-220	36°54'44.4"N 127°32'29.4"E	-	RNP 1	-
003	TF	TU066	-	241(232.4)	8.8	-	@6 000	-220	36°49'22.4"N 127°23'49.1"E	-	RNP 1	-
004	TF	TU067	-	241(232.4)	9.2	-	@6 000	-	36°43'43.8"N 127°14'44.4"E	-	RNP 1	-
005	TF	BULTI	-	278(269.1)	20.3	-	+6 000	-	36°43'22.3"N 126°49'29.7"E	-	RNP 1	-

Change : Establishment and Information of standard instrument departure procedure for RWY 06L/R.

CHEONGJU/Cheongju INTL(RKTU)
RWY 06L/R
RNP MAKDU 1D, RNP OSPOT 1D

AERONAUTICAL DATA TABULATION

Standard Instrument Departure Procedure Coding Tables

RNP MAKDU 1D

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	BUKIL	-	06L-061(052.4) 06R-060(051.5)	06L-8.0 06R-8.1	-	-	-220	36°48'23.2"N 127°38'33.7"E	-	RNP 1	-
002	TF	TUTAE	-	331(322.5)	8.0	-	@6 000	-220	36°54'44.4"N 127°32'29.4"E	-	RNP 1	-
003	TF	TU066	-	241(232.4)	8.8	-	@6 000	-220	36°49'22.4"N 127°23'49.1"E	-	RNP 1	-
004	TF	TU068	-	151(142.4)	8.2	-	@6 000	-	36°42'51.7"N 127°30'03.3"E	-	RNP 1	-
005	TF	MAKDU	-	144(135.4)	21.9	-	+6 000	-	36°27'12.3"N 126°49'09.0"E	-	RNP 1	-

RNP OSPOT 1D

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	BUKIL	-	06L-061(052.4) 06R-060(051.5)	06L-8.0 06R-8.1	-	-	-220	36°48'23.2"N 127°38'33.7"E	-	RNP 1	-
002	TF	TUTAE	-	331(322.5)	8.0	-	@6 000	-220	36°54'44.4"N 127°32'29.4"E	-	RNP 1	-
003	TF	OSPOT	-	253(244.5)	10.3	-	+6 000	-	36°50'18.1"N 127°20'54.9"E	-	RNP 1	-

Change : Amended procedure name.

INTENTIONALLY

LEFT

BLANK


STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO

Note : Departure under ICAO Flight Procedures.

TRANSITION ALT 14 000
TRANSITION LVL FL 140

JUNGWON DEP 129.65
CHEONGJU TWR 118.7 126.2

CHEONGJU/Cheongju INTL(RKTU)
RWY 24L/R
RNP GUKDO 1C, RNP OLMEN 1C
RNP BULTI 1C, RNP MAKDU 1C
RNP OSPOT 1C

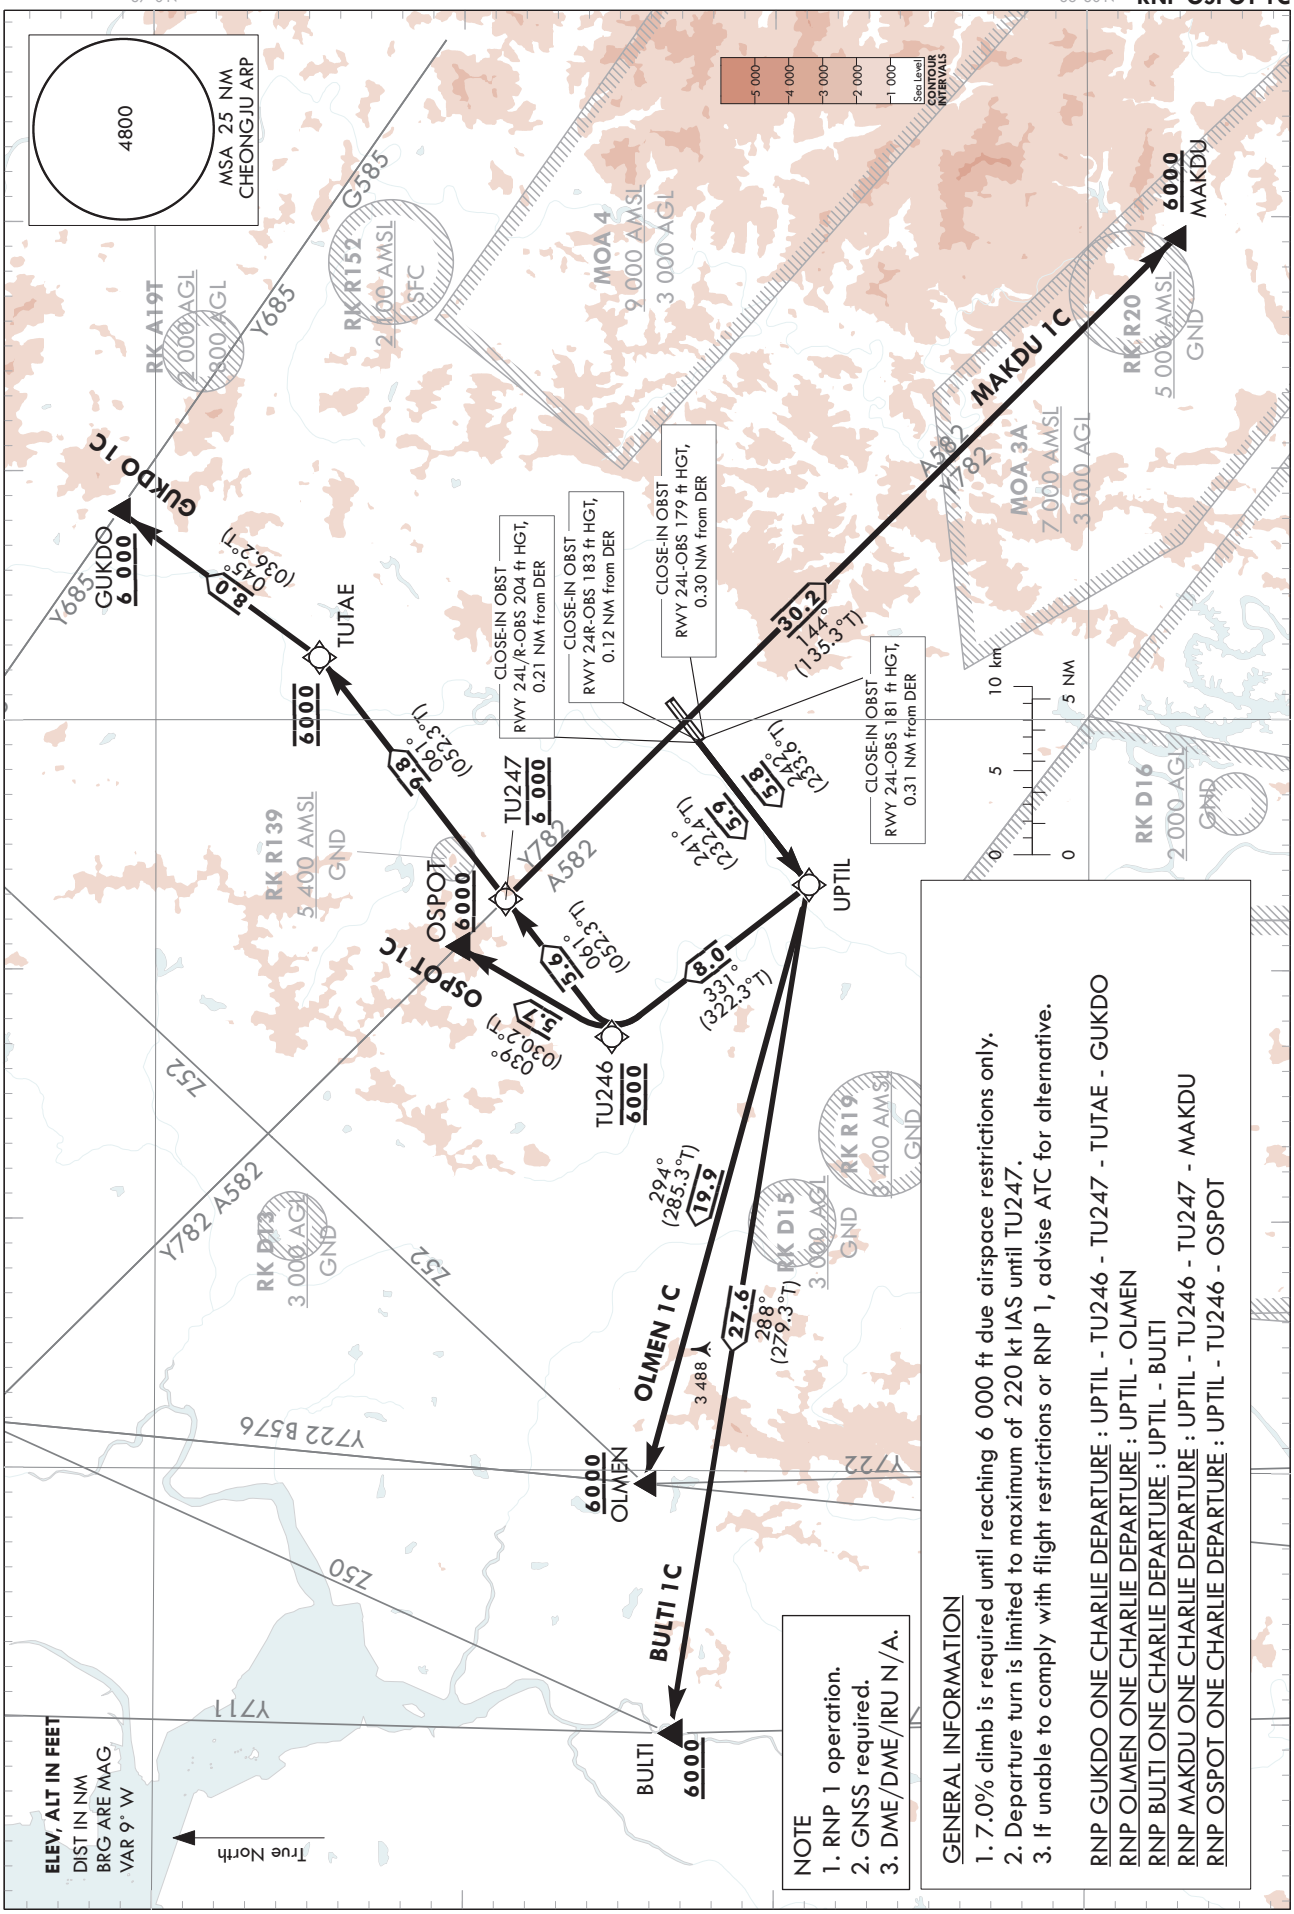

NOTE
1. RNP 1 operation.
2. GNSS required.
3. DME/DME/IRU N/A.

GENERAL INFORMATION
1. 7.0% climb is required until reaching 6 000 ft due airspace restrictions only.
2. Departure turn is limited to maximum of 220 kt IAS until TU247.
3. If unable to comply with flight restrictions or RNP 1, advise ATC for alternative.

RNP GUKDO ONE CHARLIE DEPARTURE : UPTIL - TU246 - TU247 - TUTAE - GUKDO
RNP OLMEN ONE CHARLIE DEPARTURE : UPTIL - OLMEN
RNP BULTI ONE CHARLIE DEPARTURE : UPTIL - BULTI
RNP MAKDU ONE CHARLIE DEPARTURE : UPTIL - TU246 - TU247 - MAKDU
RNP OSPOT ONE CHARLIE DEPARTURE : UPTIL - TU246 - OSPOT

Change : Amended chart symbol.

Standard Instrument Departure Procedure Coding Tables

RNP GUKDO 1C

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	UPTIL	-	24L-242(233.6) 24R-241(232.4)	24L-5.8 24R-5.9	-	-	-220	36°38'59.7"N 127°23'23.8"E	-	RNP 1	-
002	TF	TU246	-	331(322.3)	8.0	-	@6 000	-220	36°45'19.8"N 127°17'19.1"E	-	RNP 1	-
003	TF	TU247	-	061(052.3)	5.6	-	@6 000	-220	36°48'45.1"N 127°22'49.3"E	-	RNP 1	-
004	TF	TUTAE	-	061(052.3)	9.8	-	@6 000	-	36°54'44.4"N 127°32'29.4"E	-	RNP 1	-
005	TF	GUKDO	-	045(036.2)	8.0	-	+6 000	-	37°01'10.9"N 127°38'22.9"E	-	RNP 1	-

RNP OLMEN 1C

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	UPTIL	-	24L-242(233.6) 24R-241(232.4)	24L-5.8 24R-5.9	-	-	-220	36°38'59.7"N 127°23'23.8"E	-	RNP 1	-
002	TF	OLMEN	-	294(285.3)	19.9	-	+6 000	-	36°44'13.4"N 126°59'27.6"E	-	RNP 1	-

RNP BULTI 1C

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	UPTIL	-	24L-242(233.6) 24R-241(232.4)	24L-5.8 24R-5.9	-	-	-220	36°38'59.7"N 127°23'23.8"E	-	RNP 1	-
002	TF	BULTI	-	288(279.3)	27.6	-	+6 000	-	36°43'22.3"N 126°49'29.7"E	-	RNP 1	-

CHEONGJU/Cheongju INTL(RKTU)
RWY 24L/R
RNP MAKDU 1C, RNP OSPOT 1C

AERONAUTICAL DATA TABULATION

Standard Instrument Departure Procedure Coding Tables

RNP MAKDU 1C

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/RDH	Navigation specification	Remarks
001	CF	UPTIL	-	24L-242(233.6) 24R-241(232.4)	24L-5.8 24R-5.9	-	-	-220	36°38'59.7"N 127°23'23.8"E	-	RNP 1	-
002	TF	TU246	-	331(322.3)	8.0	-	@6 000	-220	36°45'19.8"N 127°17'19.1"E	-	RNP 1	-
003	TF	TU247	-	061(052.3)	5.6	-	@6 000	-220	36°48'45.1"N 127°22'49.3"E	-	RNP 1	-
004	TF	MAKDU	-	144(135.3)	30.2	-	+6 000	-	36°27'12.3"N 127°49'09.0"E	-	RNP 1	-

RNP OSPOT 1C

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/RDH	Navigation specification	Remarks
001	CF	UPTIL	-	24L-242(233.6) 24R-241(232.4)	24L-5.8 24R-5.9	-	-	-220	36°38'59.7"N 127°23'23.8"E	-	RNP 1	-
002	TF	TU246	-	331(322.3)	8.0	-	@6 000	-220	36°45'19.8"N 127°17'19.1"E	-	RNP 1	-
003	TF	OSPOT	-	039(030.2)	5.7	-	+6 000	-	36°50'18.1"N 127°20'54.9"E	-	RNP 1	-

Change : Information of ALT restriction for OSPOT.

INTENTIONALLY

LEFT

BLANK


STANDARD DEPARTURE CHART INSTRUMENT (SID) - ICAO

TRANSITION ALT 14 000
TRANSITION LVL FL 140

JUNGWON DEP 129.65
CHEONGJU TWR 118.7 126.2

CHEONGJU/Cheongju INTL(RKTU)
RWY 06L/R RADAR 1D
RWY 24L/R RADAR 1C

Note : Departure under ICAO Flight Procedures.

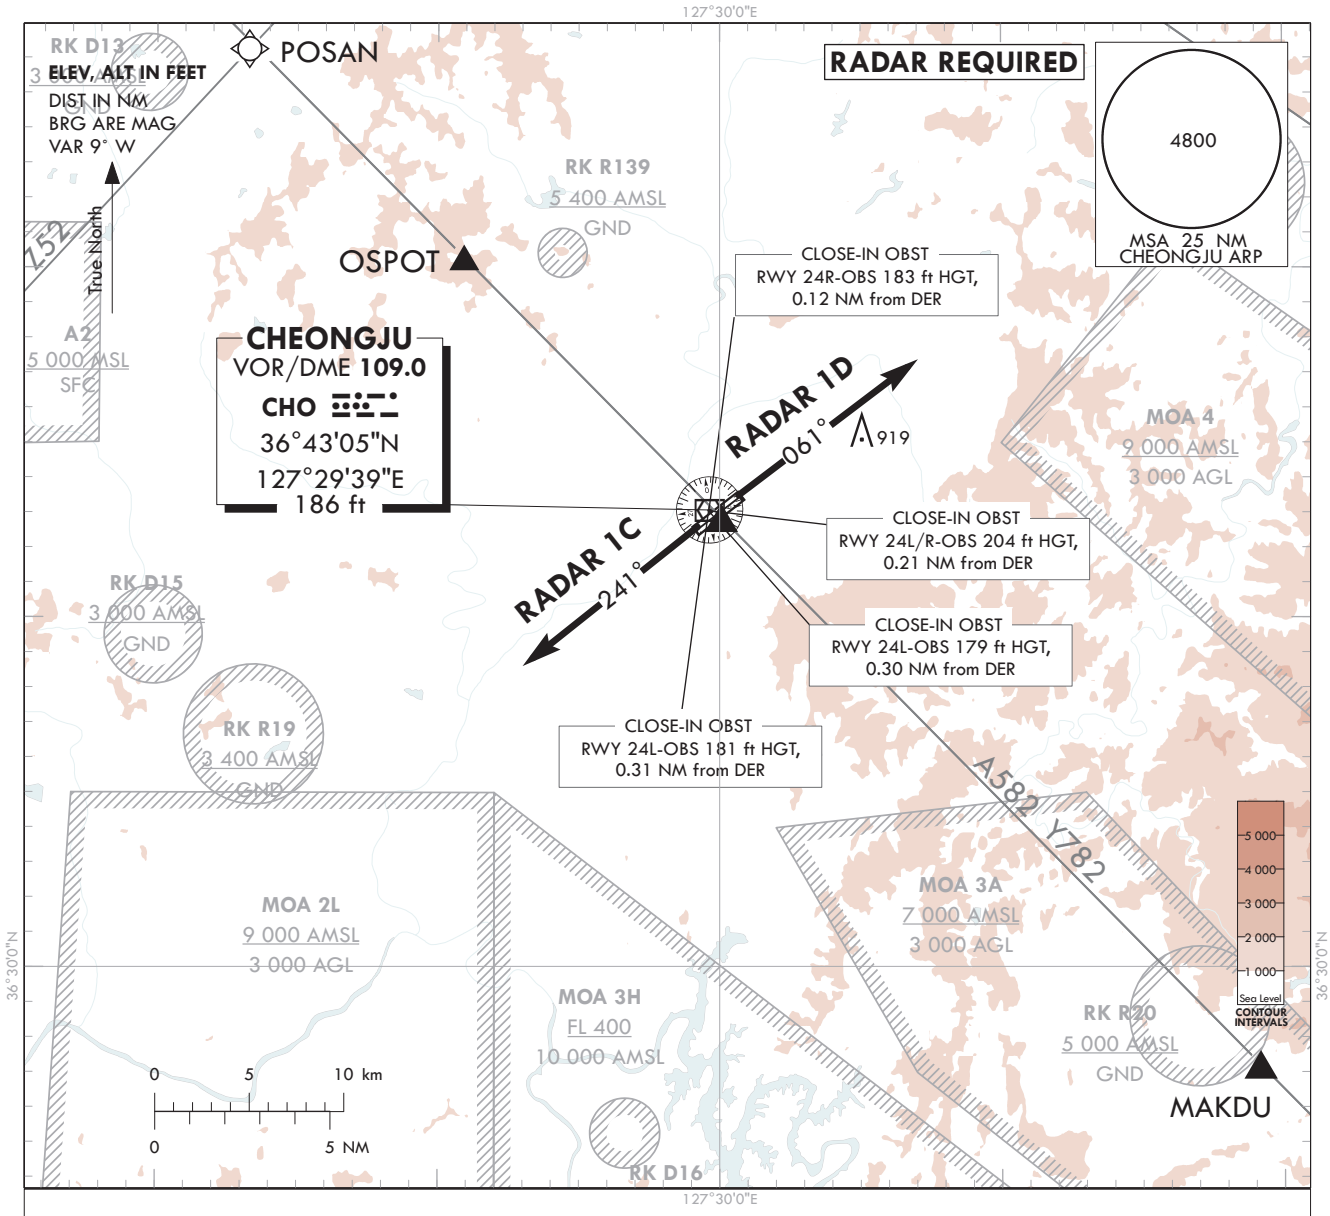

GENERAL INFORMATION

1. 7.0% CG required until 5 000 ft due airspace restrictions only.
2. Pilot shall use caution not to enter restricted areas around airport.

RADAR ONE DELTA DEPARTURE

TAKE OFF RWY 06L/R : Climb HDG 061° expect radar vectors to intercept filed Enroute fix or Navaid.
Maintain 6 000 ft or assigned altitude(flight level).
Expect filed altitude/flight level within 10 minutes after departure.

RADAR ONE CHARLIE DEPARTURE

TAKE OFF RWY 24L/R : Climb HDG 241° Expect radar vectors to intercept filed Enroute fix or Navaid.
Maintain 6 000 ft or assigned altitude(flight level).
Expect filed altitude/flight level within 10 minutes after departure.

LOST COMMUNICATIONS PROCEDURE

If radio contact is not established with departure control prior to reaching 5 000 ft, continue climbing and proceed filed route and altitude.

Change : Information of standard instrument departure procedure for RWY 06L/R, 24L/R.

INTENTIONALLY

LEFT

BLANK