
STANDARD ARRIVAL CHART INSTRUMENT(STAR) - ICAO

Note : Arrival under ICAO Flight Procedures.

TRANSITION ALT 14 000
TRANSITION LVL FL 140

JUNGWON APP	134.0	134.1
	134.4	
CHEONGJU TWR	118.7	126.2

CHEONGJU/Cheongju INTL(RKTU)
RWY 06 L/R
RNP OSPOT 1P, RNP OSPOT 1B
RNP BIGOB 1B, RNP MAKDU 1B

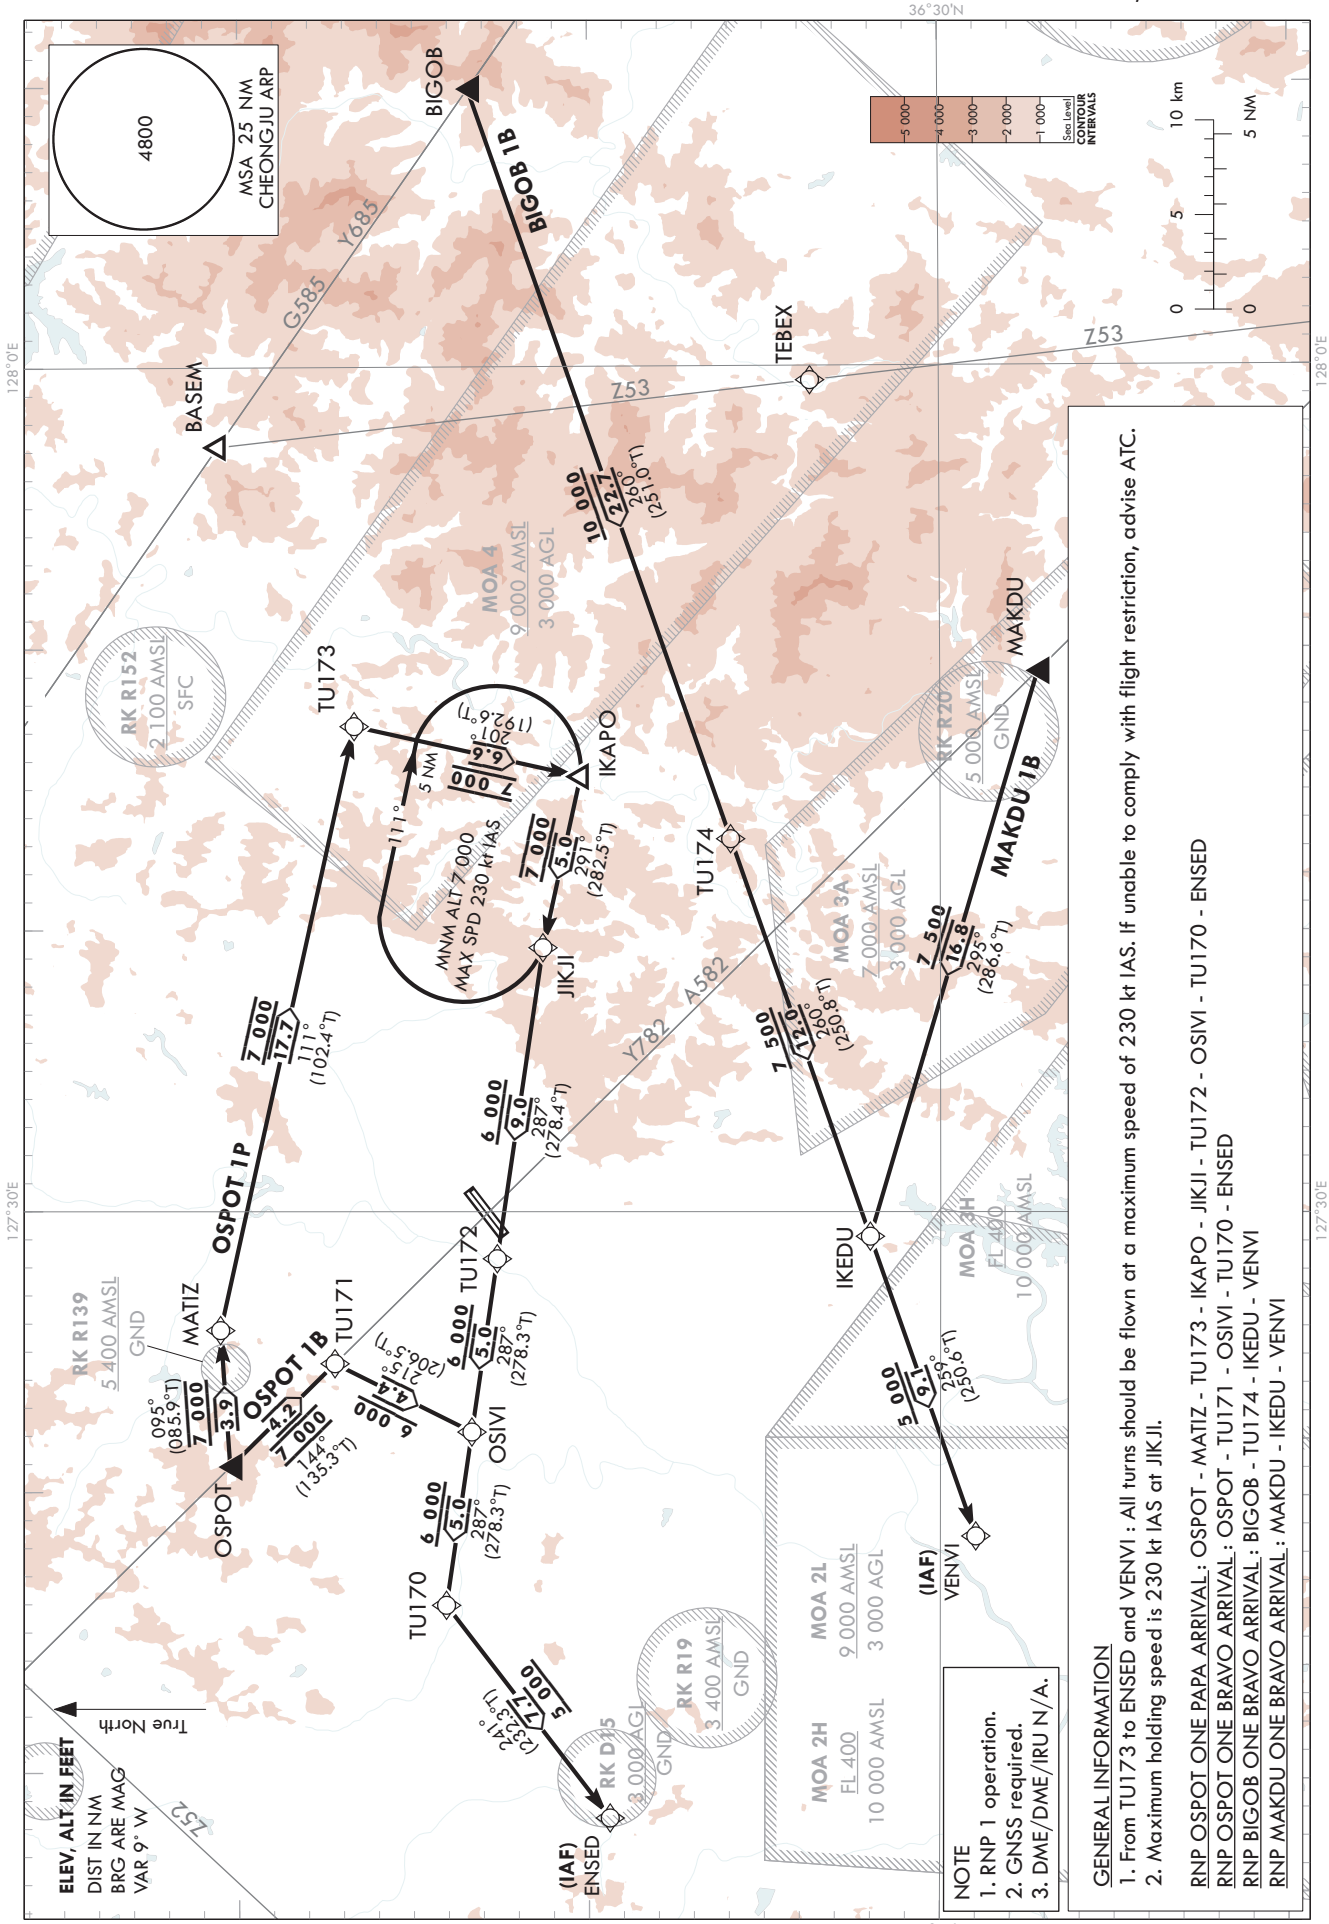

NOTE
1. RNP 1 operation.
2. GNSS required.
3. DME/DME/IRU N/A.

GENERAL INFORMATION
1. From TU173 to ENSED and VENVI : All turns should be flown at a maximum speed of 230 kt IAS. If unable to comply with flight restriction, advise ATC.
2. Maximum holding speed is 230 kt IAS at JIKJI.

RNP OSPOT ONE PAPA ARRIVAL: OSPOT - MATIZ - TU173 - IKAPO - JIKJI - TU172 - OSIVI - TU170 - ENSED
RNP OSPOT ONE BRAVO ARRIVAL: OSPOT - TU171 - OSIVI - TU170 - ENSED
RNP BIGOB ONE BRAVO ARRIVAL: BIGOB - TU174 - IKEDU - VENVI
RNP MAKDU ONE BRAVO ARRIVAL: MAKDU - IKEDU - VENVI

Change : Amended phrases.

Standard Instrument Arrival Procedure Coding Tables

RNP OSPOT 1P

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	OSPOT	-			-	@7 000	-	36°50'18.1"N 127°20'54.9"E	-	RNP 1	-
002	TF	MATIZ	-	095(085.9)	3.9	-	@7 000	-	36°50'34.9"N 127°25'46.1"E	-	RNP 1	-
003	TF	TU173	-	111(102.4)	17.7	-	@7 000	-230	36°46'44.7"N 127°47'14.2"E	-	RNP 1	-
004	TF	IKAPO	-	201(192.6)	6.6	-	@7 000	-230	36°40'16.6"N 127°45'26.2"E	-	RNP 1	-
005	TF	JIKJI	-	291(282.5)	5.0	-	@7 000	-230	36°41'21.7"N 127°39'22.1"E	-	RNP 1	-
006	TF	TU172	-	287(278.4)	9.0	-	+6 000	-230	36°42'40.4"N 127°28'19.6"E	-	RNP 1	-
007	TF	OSIVI	-	287(278.3)	5.0	-	+6 000	-230	36°43'23.8"N 127°22'10.3"E	-	RNP 1	-
008	TF	TU170	-	287(278.3)	5.0	-	+6 000	-230	36°44'06.8"N 127°16'01.0"E	-	RNP 1	-
009	TF	ENSED	-	241(232.3)	7.7	-	+5 000	-230	36°39'25.0"N 127°08'29.0"E	-	RNP 1	IAF

RNP OSPOT 1B

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	OSPOT	-			-	@7 000	-	36°50'18.1"N 127°20'54.9"E	-	RNP 1	-
002	TF	TU171	-	144(135.3)	4.2	-	@7 000	-	36°47'18.7"N 127°24'35.6"E	-	RNP 1	-
003	TF	OSIVI	-	215(206.5)	4.4	-	+6 000	-230	36°43'23.8"N 127°22'10.3"E	-	RNP 1	-
004	TF	TU170	-	287(278.3)	5.0	-	+6 000	-230	36°44'06.8"N 127°16'01.0"E	-	RNP 1	-
005	TF	ENSED	-	241(232.3)	7.7	-	+5 000	-230	36°39'25.0"N 127°08'29.0"E	-	RNP 1	IAF

HOLDING PROCEDURE

Holding Identification	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Time (min)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
RNP OPSOT 1P	HM	JIKJI	Y	291(282.5)	-	R	+7 000	-230	36°41'21.7"N 127°39'22.1"E	-	RNP 1	5 NM Leg

CHEONGJU/Cheongju INTL(RKTU)
RWY 06L/R
RNP BIGOB 1B, RNP MAKDU 1B

AERONAUTICAL DATA TABULATION

Standard Instrument Arrival Procedure Coding Tables

RNP BIGOB 1B

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	BIGOB	-			-	+12 000	-	36°43'25.4"N 128°09'52.0"E	-	RNP 1	-
002	TF	TU174	-	260(251.0)	22.7	-	+10 000	-	36°35'59.4"N 127°43'13.3"E	-	RNP 1	-
003	TF	IKEDU	-	260(250.8)	12.0	-	+7 500	-	36°32'00.5"N 127°29'07.6"E	-	RNP 1	-
004	TF	VENVI	-	259(250.6)	9.1	-	+5 000	-230	36°28'59.3"N 127°18'30.9"E	-	RNP 1	IAF

RNP MAKDU 1B

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	MAKDU	-			-	+8 000	-	36°27'12.3"N 127°49'09.0"E	-	RNP 1	-
002	TF	IKEDU	-	295(286.6)	16.8	-	+7 500	-	36°32'00.5"N 127°29'07.6"E	-	RNP 1	-
003	TF	VENVI	-	259(250.6)	9.1	-	+5 000	-230	36°28'59.3"N 127°18'30.9"E	-	RNP 1	IAF

Change : Information of remarks for VENVI.

INTENTIONALLY

LEFT

BLANK


STANDARD ARRIVAL CHART INSTRUMENT (STAR) - ICAO

Note : Arrival under ICAO Flight Procedures.

TRANSITION ALT 14 000
TRANSITION LVL FL 140

JUNGWON APP	134.0	134.1	
	134.4		
CHEONGJU TWR	118.7	126.2	

CHEONGJU/Cheongju INTL(RKTU)
RWY 24 L/R
RNP OSPOT 1A, RNP OSPOT 1T
RNP BIGOB 1A, RNP MAKDU 1A

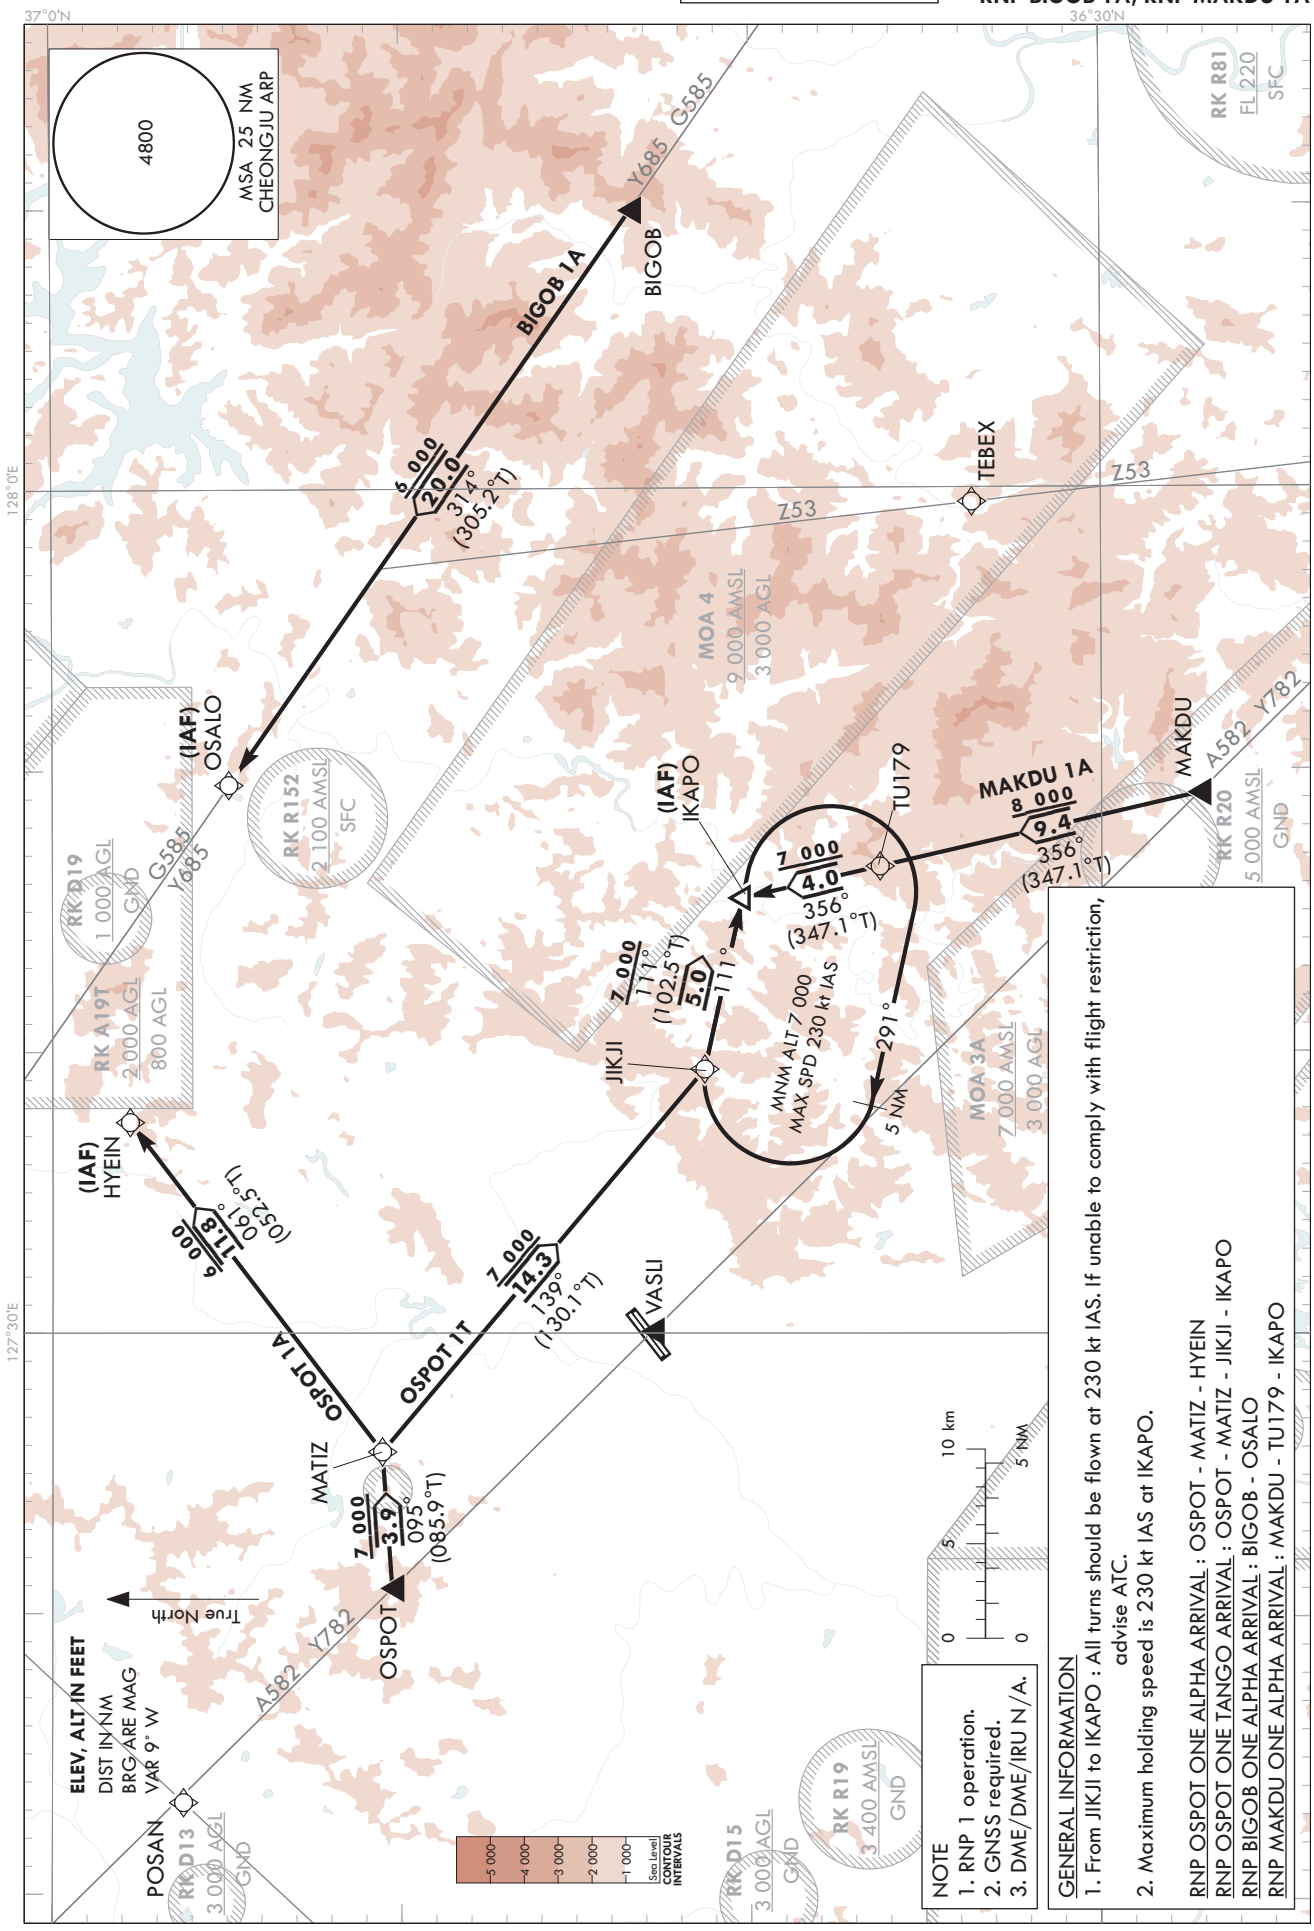

NOTE
1. RNP 1 operation.
2. GNSS required.
3. DME/DME/IRU N/A.

GENERAL INFORMATION
1. From JIKJI to IKAPO : All turns should be flown at 230 kt IAS. If unable to comply with flight restriction, advise ATC.
2. Maximum holding speed is 230 kt IAS at IKAPO.

RNP OSPOT ONE ALPHA ARRIVAL : OSPOT - MATIZ - HYEIN
RNP OSPOT ONE TANGO ARRIVAL : OSPOT - MATIZ - JIKJI - IKAPO
RNP BIGOB ONE ALPHA ARRIVAL : BIGOB - OSALO
RNP MAKDU ONE ALPHA ARRIVAL : MAKDU - TU179 - IKAPO

CHEONGJU/Cheongju INTL(RKTU)
RWY 24L/R
RNP OSPOT 1A, RNP OSPOT 1T
RNP BIGOB 1A, RNP MAKDU 1A

AERONAUTICAL DATA TABULATION

Standard Instrument Arrival Procedure Coding Tables

RNP OSPOT 1A

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	OSPOT	-			-	+7 000	-	36°50'18.1"N 127°20'54.9"E	-	RNP 1	-
002	TF	MATIZ	-	095(085.9)	3.9	-	+7 000	-	36°50'34.9"N 127°25'46.1"E	-	RNP 1	-
003	TF	HYEIN	-	061(052.5)	11.8	-	+6 000	-230	36°57'47.1"N 127°37'29.7"E	-	RNP 1	IAF

RNP OSPOT 1T

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	OSPOT	-			-	+7 000	-	36°50'18.1"N 127°20'54.9"E	-	RNP 1	-
002	TF	MATIZ	-	095(085.9)	3.9	-	+7 000	-	36°50'34.9"N 127°25'46.1"E	-	RNP 1	-
003	TF	JIKJI	-	139(130.1)	14.3	-	+7 000	-230	36°41'21.7"N 127°39'22.1"E	-	RNP 1	-
004	TF	IKAPO	-	111(102.5)	5.0	-	+7 000	-230	36°40'16.6"N 127°45'26.2"E	-	RNP 1	IAF

RNP BIGOB 1A

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	BIGOB	-			-	+12 000	-	36°43'25.4"N 128°09'52.0"E	-	RNP 1	-
002	TF	OSALO	-	314(305.2)	20.0	-	+6 000	-	36°54'56.9"N 127°49'29.3"E	-	RNP 1	IAF

RNP MAKDU 1A

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	MAKDU	-			-	+8 000	-	36°27'12.3"N 127°49'09.0"E	-	RNP 1	-
002	TF	TU179	-	356(347.1)	9.4	-	+8 000	-	36°36'20.2"N 127°46'33.5"E	-	RNP 1	-
003	TF	IKAPO	-	356(347.1)	4.0	-	+7 000	-230	36°40'16.6"N 127°45'26.2"E	-	RNP 1	IAF

HOLDING PROCEDURE

Holding Identification	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Time (min)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
RNP OPSOT 1T RNP MAKDU 1A	HM	IKAPO	Y	111(102.5)	-	R	+7 000	-230	36°40'16.6"N 127°45'26.2"E	-	RNP 1	5 NM Leg

Change : Information of remarks for HYEIN, IKAPO, OSALO and holding procedure(102.2 → 102.5).