
STANDARD ARRIVAL CHART INSTRUMENT (STAR) - ICAO

Note : Arrival under ICAO Flight Procedures.

TRANSITION ALT 14 000
TRANSITION LVL FL 140

JEJU	APP	121.2 124.05
JEJU	TWR	118.2 118.55

JEJU/Jeju Intl(RKPC)
RWY 07
RNAV DOTOL 2P, RNAV UPGOS 1P
RNAV TAMNA 2P, RNAV TOSAN 2P
RNAV SOSDO 2P, RNAV LIMDI 1P

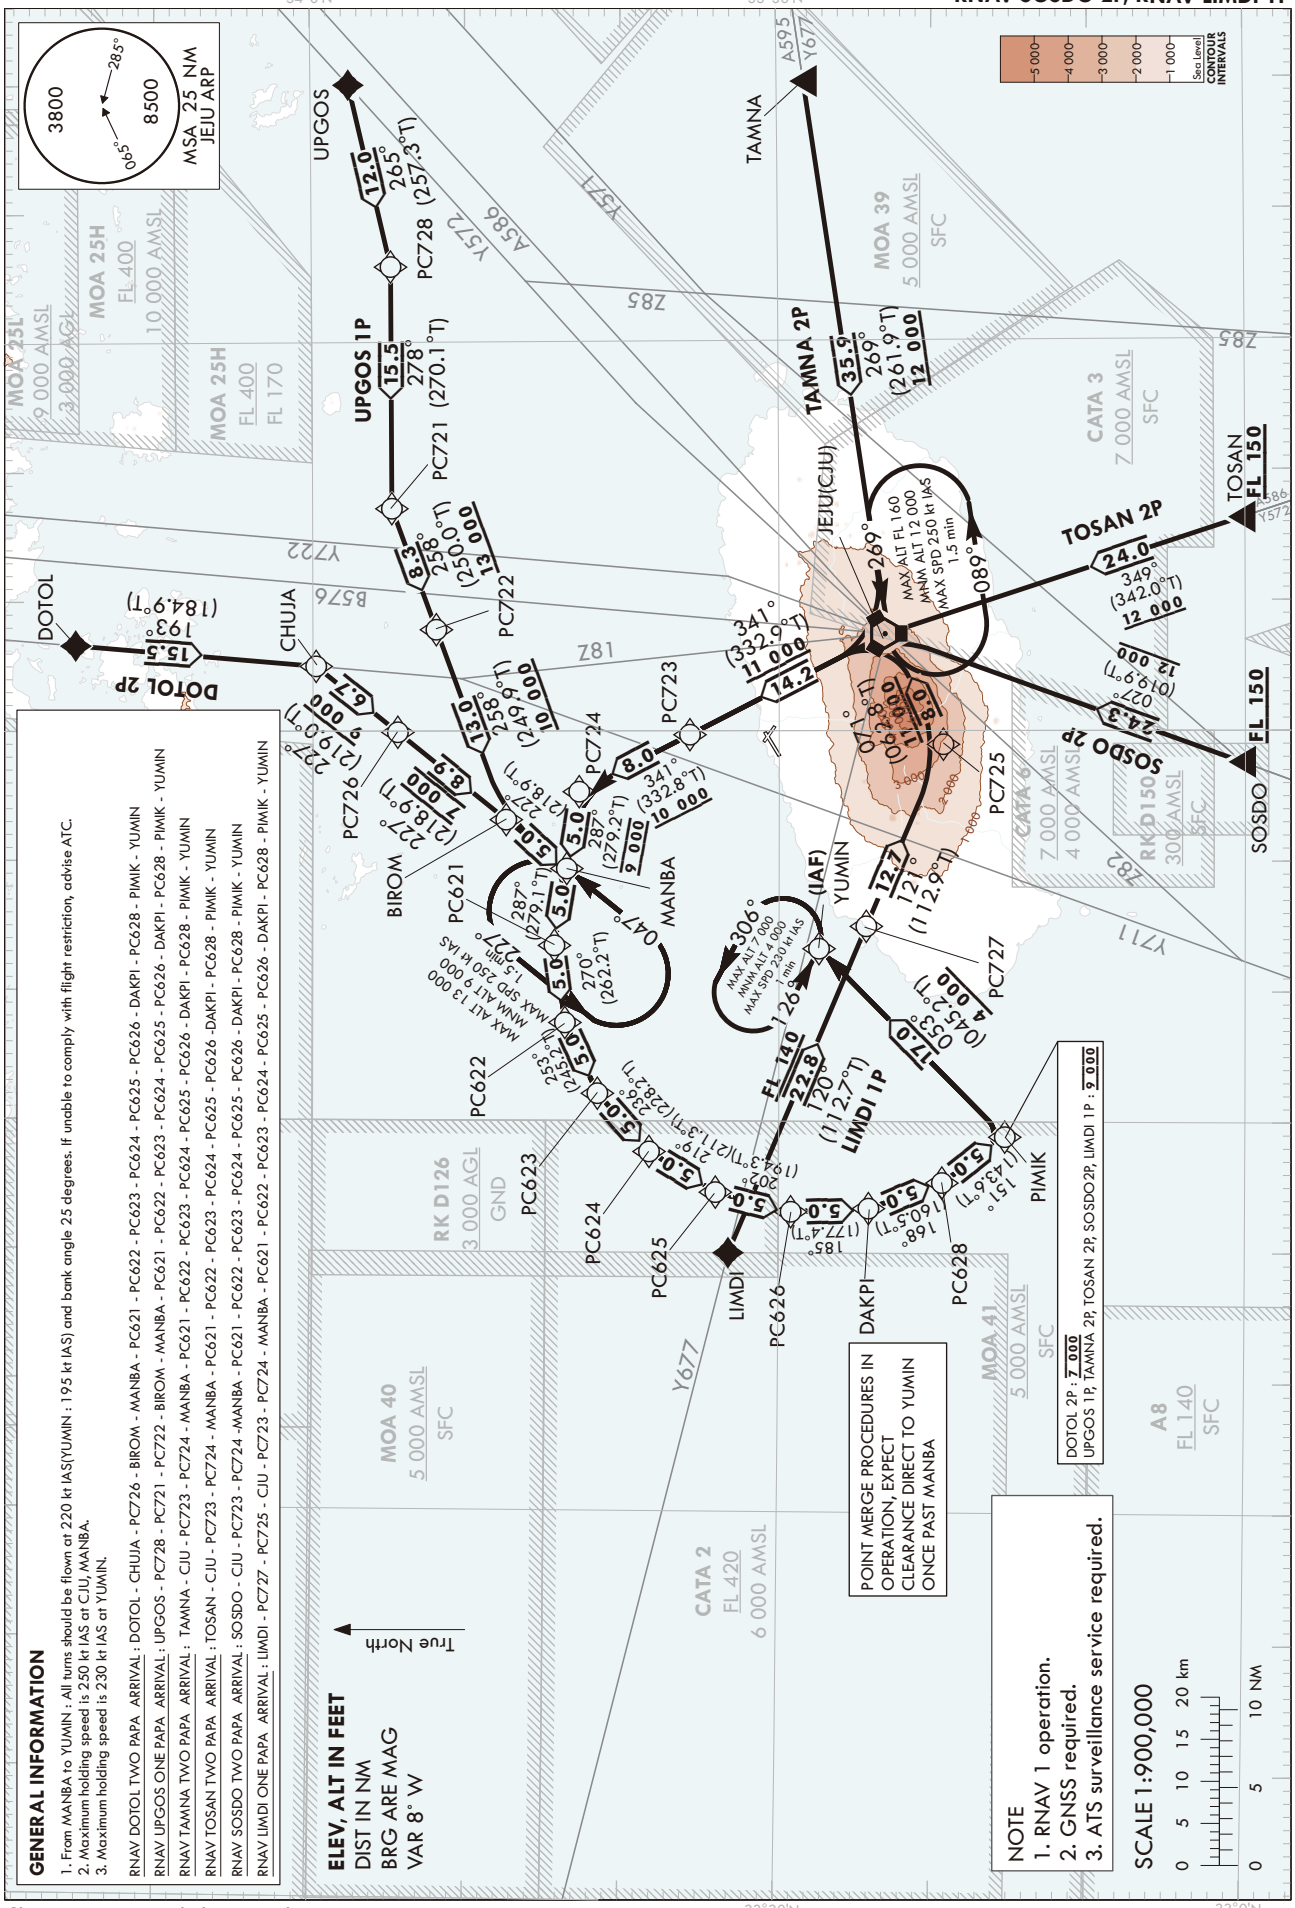

GENERAL INFORMATION

1. From MANBA to YUMIN : All turns should be flown at 220 kt IAS(YUMIN : 195 kt IAS) and bank angle 25 degrees. If unable to comply with flight restriction, advise ATC.
2. Maximum holding speed is 250 kt IAS at CIU, MANBA.
3. Maximum holding speed is 230 kt IAS at YUMIN.

RNAV DOTOL TWO PAPA ARRIVAL : DOTOL - CHUJA - PC726 - BIROM - MANBA - PC621 - PC622 - PC623 - PC624 - PC625 - PC626 - DAKPI - PC628 - PIMIK - YUMIN

RNAV UPGOS ONE PAPA ARRIVAL : UPGOS - PC728 - PC721 - PC722 - BIROM - MANBA - PC621 - PC622 - PC623 - PC624 - PC625 - PC626 - DAKPI - PC628 - PIMIK - YUMIN

RNAV TAMNA TWO PAPA ARRIVAL : TAMNA - CIU - PC723 - PC724 - MANBA - PC621 - PC622 - PC623 - PC624 - PC625 - PC626 - DAKPI - PC628 - PIMIK - YUMIN

RNAV TOSAN TWO PAPA ARRIVAL : TOSAN - CIU - PC723 - PC724 - MANBA - PC621 - PC622 - PC623 - PC624 - PC625 - PC626 -DAKPI - PC628 - PIMIK - YUMIN

RNAV SOSDO TWO PAPA ARRIVAL : SOSDO - CIU - PC723 - PC724 -MANBA - PC621 - PC622 - PC623 - PC624 - PC625 - PC626 - DAKPI - PC628 - PIMIK - YUMIN

RNAV LIMDI ONE PAPA ARRIVAL : LIMDI - PC727 - PC725 - CIU - PC723 - PC724 - MANBA - PC621 - PC622 - PC623 - PC624 - PC625 - PC626 - DAKPI - PC628 - PIMIK - YUMIN

ELEV, ALT IN FEET
DIST IN NM
BRG ARE MAG
VAR 8° W

True North

POINT MERGE PROCEDURES IN OPERATION, EXPECT CLEARANCE DIRECT TO YUMIN ONCE PAST MANBA

DOTOL 2P : 7 000
UPGOS 1P, TAMNA 2P, TOSAN 2P, SOSDO2P, LIMDI 1P : 9 000

NOTE
1. RNAV 1 operation.
2. GNSS required.
3. ATS surveillance service required.

SCALE 1:900,000
0 5 10 15 20 km
0 5 10 NM

Change : Improved clarity such as terrain.

Standard Instrument Arrival Procedure Coding Tables

RNAV DOTOL 2P

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	DOTOL	-	-	-	-	-	-	34°15'15.4"N 126°36'36.6"E	-	RNAV 1	-
002	TF	CHUJA	-	193(184.9)	15.5	-	-	-	33°59'47.3"N 126°35'00.2"E	-	RNAV 1	-
003	TF	PC726	-	227(219.0)	6.7	-	-9 000	-	33°54'32.2"N 126°29'54.4"E	-	RNAV 1	-
004	TF	BIROM	-	227(218.9)	8.9	-	@7 000	-	33°47'33.9"N 126°23'09.8"E	-	RNAV 1	-
005	TF	MANBA	-	227(218.9)	5.0	-	-	@220	33°43'39.9"N 126°19'24.0"E	-	RNAV 1	Bank angle 25°
006	TF	PC621	-	287(279.1)	5.0	-	-	@220	33°44'27.4"N 126°13'28.9"E	-	RNAV 1	Bank angle 25°
007	TF	PC622	-	270(262.2)	5.0	-	-	@220	33°43'46.4"N 126°07'32.6"E	-	RNAV 1	Bank angle 25°
008	TF	PC623	-	253(245.2)	5.0	-	-	@220	33°41'40.2"N 126°02'06.2"E	-	RNAV 1	Bank angle 25°
009	TF	PC624	-	236(228.2)	5.0	-	-	@220	33°38'19.9"N 125°57'38.2"E	-	RNAV 1	Bank angle 25°
010	TF	PC625	-	219(211.3)	5.0	-	-	@220	33°34'03.1"N 125°54'31.8"E	-	RNAV 1	Bank angle 25°
011	TF	PC626	-	202(194.3)	5.0	-	-	@220	33°29'11.9"N 125°53'02.9"E	-	RNAV 1	Bank angle 25°
012	TF	DAKPI	-	185(177.4)	5.0	-	-	@220	33°24'11.7"N 125°53'19.1"E	-	RNAV 1	Bank angle 25°
013	TF	PC628	-	168(160.5)	5.0	-	-	@220	33°19'28.4"N 125°55'18.5"E	-	RNAV 1	Bank angle 25°
014	TF	PIMIK	-	151(143.6)	5.0	-	@7 000	@220	33°15'26.4"N 125°58'50.7"E	-	RNAV 1	Bank angle 25°
015	TF	YUMIN	-	053(045.2)	17.0	-	+4 000	@195	33°27'25.7"N 126°13'15.5"E	-	RNAV 1	IAF

RNAV UPGOS 1P

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	UPGOS	-	-	-	-	-	-	33°57'33.3"N 127°19'53.0"E	-	RNAV 1	-
002	TF	PC728	-	265(257.3)	12.0	-	-	-	33°54'53.8"N 127°05'49.0"E	-	RNAV 1	-
003	TF	PC721	-	278(270.1)	15.5	-	-	-	33°54'53.3"N 126°47'09.7"E	-	RNAV 1	-
004	TF	PC722	-	258(250.0)	8.3	-	+13 000	-	33°52'02.9"N 126°37'48.9"E	-	RNAV 1	-
005	TF	BIROM	-	258(249.9)	13.0	-	+10 000	-	33°47'33.9"N 126°23'09.8"E	-	RNAV 1	-
006	TF	MANBA	-	227(218.9)	5.0	-	@9 000	@220	33°43'39.9"N 126°19'24.0"E	-	RNAV 1	Bank angle 25°
007	TF	PC621	-	287(279.1)	5.0	-	-	@220	33°44'27.4"N 126°13'28.9"E	-	RNAV 1	Bank angle 25°
008	TF	PC622	-	270(262.2)	5.0	-	-	@220	33°43'46.4"N 126°07'32.6"E	-	RNAV 1	Bank angle 25°
009	TF	PC623	-	253(245.2)	5.0	-	-	@220	33°41'40.2"N 126°02'06.2"E	-	RNAV 1	Bank angle 25°
010	TF	PC624	-	236(228.2)	5.0	-	-	@220	33°38'19.9"N 125°57'38.2"E	-	RNAV 1	Bank angle 25°
011	TF	PC625	-	219(211.3)	5.0	-	-	@220	33°34'03.1"N 125°54'31.8"E	-	RNAV 1	Bank angle 25°
012	TF	PC626	-	202(194.3)	5.0	-	-	@220	33°29'11.9"N 125°53'02.9"E	-	RNAV 1	Bank angle 25°
013	TF	DAKPI	-	185(177.4)	5.0	-	-	@220	33°24'11.7"N 125°53'19.1"E	-	RNAV 1	Bank angle 25°
014	TF	PC628	-	168(160.5)	5.0	-	-	@220	33°19'28.4"N 125°55'18.5"E	-	RNAV 1	Bank angle 25°
015	TF	PIMIK	-	151(143.6)	5.0	-	@9 000	@220	33°15'26.4"N 125°58'50.7"E	-	RNAV 1	Bank angle 25°
016	TF	YUMIN	-	053(045.2)	17.0	-	+4 000	@195	33°27'25.7"N 126°13'15.5"E	-	RNAV 1	IAF

JEJU/Jeju Intl(RKPC)
RWY 07
RNAV TAMNA 2P, RNAV TOSAN 2P

AERONAUTICAL DATA TABULATION

Standard Instrument Arrival Procedure Coding Tables

RNAV TAMNA 2P

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	TAMNA	-	-	-	-	-	-	33°28'15.5"N 127°19'53.0"E	-	RNAV 1	-
002	TF	CJU	-	269(261.9)	35.9	-	+12 000	-	33°23'04.6"N 126°37'26.8"E	-	RNAV 1	-
003	TF	PC723	-	341(332.9)	14.2	-	+11 000	-	33°35'44.3"N 126°29'41.9"E	-	RNAV 1	-
004	TF	PC724	-	341(332.8)	8.0	-	+10 000	-	33°42'52.0"N 126°25'19.1"E	-	RNAV 1	-
005	TF	MANBA	-	287(279.2)	5.0	-	@9 000	@220	33°43'39.9"N 126°19'24.0"E	-	RNAV 1	Bank angle 25°
006	TF	PC621	-	287(279.1)	5.0	-	-	@220	33°44'27.4"N 126°13'28.9"E	-	RNAV 1	Bank angle 25°
007	TF	PC622	-	270(262.2)	5.0	-	-	@220	33°43'46.4"N 126°07'32.6"E	-	RNAV 1	Bank angle 25°
008	TF	PC623	-	253(245.2)	5.0	-	-	@220	33°41'40.2"N 126°02'06.2"E	-	RNAV 1	Bank angle 25°
009	TF	PC624	-	236(228.2)	5.0	-	-	@220	33°38'19.9"N 125°57'38.2"E	-	RNAV 1	Bank angle 25°
010	TF	PC625	-	219(211.3)	5.0	-	-	@220	33°34'03.1"N 125°54'31.8"E	-	RNAV 1	Bank angle 25°
011	TF	PC626	-	202(194.3)	5.0	-	-	@220	33°29'11.9"N 125°53'02.9"E	-	RNAV 1	Bank angle 25°
012	TF	DAKPI	-	185(177.4)	5.0	-	-	@220	33°24'11.7"N 125°53'19.1"E	-	RNAV 1	Bank angle 25°
013	TF	PC628	-	168(160.5)	5.0	-	-	@220	33°19'28.4"N 125°55'18.5"E	-	RNAV 1	Bank angle 25°
014	TF	PIMIK	-	151(143.6)	5.0	-	@9 000	@220	33°15'26.4"N 125°58'50.7"E	-	RNAV 1	Bank angle 25°
015	TF	YUMIN	-	053(045.2)	17.0	-	+4 000	@195	33°27'25.7"N 126°13'15.5"E	-	RNAV 1	IAF

RNAV TOSAN 2P

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	TOSAN	-	-	-	-	+FL 150	-	33°00'12.0"N 126°46'18.7"E	-	RNAV 1	-
002	TF	CJU	-	349(342.0)	24.0	-	+12 000	-	33°23'04.6"N 126°37'26.8"E	-	RNAV 1	-
003	TF	PC723	-	341(332.9)	14.2	-	+11 000	-	33°35'44.3"N 126°29'41.9"E	-	RNAV 1	-
004	TF	PC724	-	341(332.8)	8.0	-	+10 000	-	33°42'52.0"N 126°25'19.1"E	-	RNAV 1	-
005	TF	MANBA	-	287(279.2)	5.0	-	@9 000	@220	33°43'39.9"N 126°19'24.0"E	-	RNAV 1	Bank angle 25°
006	TF	PC621	-	287(279.1)	5.0	-	-	@220	33°44'27.4"N 126°13'28.9"E	-	RNAV 1	Bank angle 25°
007	TF	PC622	-	270(262.2)	5.0	-	-	@220	33°43'46.4"N 126°07'32.6"E	-	RNAV 1	Bank angle 25°
008	TF	PC623	-	253(245.2)	5.0	-	-	@220	33°41'40.2"N 126°02'06.2"E	-	RNAV 1	Bank angle 25°
009	TF	PC624	-	236(228.2)	5.0	-	-	@220	33°38'19.9"N 125°57'38.2"E	-	RNAV 1	Bank angle 25°
010	TF	PC625	-	219(211.3)	5.0	-	-	@220	33°34'03.1"N 125°54'31.8"E	-	RNAV 1	Bank angle 25°
011	TF	PC626	-	202(194.3)	5.0	-	-	@220	33°29'11.9"N 125°53'02.9"E	-	RNAV 1	Bank angle 25°
012	TF	DAKPI	-	185(177.4)	5.0	-	-	@220	33°24'11.7"N 125°53'19.1"E	-	RNAV 1	Bank angle 25°
013	TF	PC628	-	168(160.5)	5.0	-	-	@220	33°19'28.4"N 125°55'18.5"E	-	RNAV 1	Bank angle 25°
014	TF	PIMIK	-	151(143.6)	5.0	-	@9 000	@220	33°15'26.4"N 125°58'50.7"E	-	RNAV 1	Bank angle 25°
015	TF	YUMIN	-	053(045.2)	17.0	-	+4 000	@195	33°27'25.7"N 126°13'15.5"E	-	RNAV 1	IAF

Change : Information of course/track and speed restriction.

JEJU/Jeju Intl(RKPC)
RWY 07
RNAV SOSDO 2P, RNAV LIMDI 1P

AERONAUTICAL DATA TABULATION

Standard Instrument Arrival Procedure Coding Tables

RNAV SOSDO 2P

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	SOSDO	-	-	-	-	+FL 150	-	33°00'12.0"N 126°27'35.0"E	-	RNAV 1	-
002	TF	CJU	-	027(019.9)	24.3	-	+12 000	-	33°23'04.6"N 126°37'26.8"E	-	RNAV 1	-
003	TF	PC723	-	341(332.9)	14.2	-	+11 000	-	33°35'44.3"N 126°29'41.9"E	-	RNAV 1	-
004	TF	PC724	-	341(332.8)	8.0	-	+10 000	-	33°42'52.0"N 126°25'19.1"E	-	RNAV 1	-
005	TF	MANBA	-	287(279.2)	5.0	-	@9 000	@220	33°43'39.9"N 126°19'24.0"E	-	RNAV 1	Bank angle 25°
006	TF	PC621	-	287(279.1)	5.0	-	-	@220	33°44'27.4"N 126°13'28.9"E	-	RNAV 1	Bank angle 25°
007	TF	PC622	-	270(262.2)	5.0	-	-	@220	33°43'46.4"N 126°07'32.6"E	-	RNAV 1	Bank angle 25°
008	TF	PC623	-	253(245.2)	5.0	-	-	@220	33°41'40.2"N 126°02'06.2"E	-	RNAV 1	Bank angle 25°
009	TF	PC624	-	236(228.2)	5.0	-	-	@220	33°38'19.9"N 125°57'38.2"E	-	RNAV 1	Bank angle 25°
010	TF	PC625	-	219(211.3)	5.0	-	-	@220	33°34'03.1"N 125°54'31.8"E	-	RNAV 1	Bank angle 25°
011	TF	PC626	-	202(194.3)	5.0	-	-	@220	33°29'11.9"N 125°53'02.9"E	-	RNAV 1	Bank angle 25°
012	TF	DAKPI	-	185(177.4)	5.0	-	-	@220	33°24'11.7"N 125°53'19.1"E	-	RNAV 1	Bank angle 25°
013	TF	PC628	-	168(160.5)	5.0	-	-	@220	33°19'28.4"N 125°55'18.5"E	-	RNAV 1	Bank angle 25°
014	TF	PIMIK	-	151(143.6)	5.0	-	@9 000	@220	33°15'26.4"N 125°58'50.7"E	-	RNAV 1	Bank angle 25°
015	TF	YUMIN	-	053(045.2)	17.0	-	+4 000	@195	33°27'25.7"N 126°13'15.5"E	-	RNAV 1	IAF

RNAV LIMDI 1P

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	LIMDI	-	-	-	-	-	-	33°33'13.3"N 125°49'53.0"E	-	RNAV 1	-
002	TF	PC727	-	120(112.7)	22.8	-	+FL 140	-	33°24'23.2"N 126°14'58.9"E	-	RNAV 1	-
003	TF	PC725	-	121(112.9)	12.7	-	-	-	33°19'25.2"N 126°28'56.9"E	-	RNAV 1	-
004	TF	CJU	-	071(062.8)	8.0	-	+11 000	-	33°23'04.6"N 126°37'26.8"E	-	RNAV 1	-
005	TF	PC723	-	341(332.9)	14.2	-	+11 000	-	33°35'44.3"N 126°29'41.9"E	-	RNAV 1	-
006	TF	PC724	-	341(332.8)	8.0	-	+10 000	-	33°42'52.0"N 126°25'19.1"E	-	RNAV 1	-
007	TF	MANBA	-	287(279.2)	5.0	-	@9 000	@220	33°43'39.9"N 126°19'24.0"E	-	RNAV 1	Bank angle 25°
008	TF	PC621	-	287(279.1)	5.0	-	-	@220	33°44'27.4"N 126°13'28.9"E	-	RNAV 1	Bank angle 25°
009	TF	PC622	-	270(262.2)	5.0	-	-	@220	33°43'46.4"N 126°07'32.6"E	-	RNAV 1	Bank angle 25°
010	TF	PC623	-	253(245.2)	5.0	-	-	@220	33°41'40.2"N 126°02'06.2"E	-	RNAV 1	Bank angle 25°
011	TF	PC624	-	236(228.2)	5.0	-	-	@220	33°38'19.9"N 125°57'38.2"E	-	RNAV 1	Bank angle 25°
012	TF	PC625	-	219(211.3)	5.0	-	-	@220	33°34'03.1"N 125°54'31.8"E	-	RNAV 1	Bank angle 25°
013	TF	PC626	-	202(194.3)	5.0	-	-	@220	33°29'11.9"N 125°53'02.9"E	-	RNAV 1	Bank angle 25°
014	TF	DAKPI	-	185(177.4)	5.0	-	-	@220	33°24'11.7"N 125°53'19.1"E	-	RNAV 1	Bank angle 25°
015	TF	PC628	-	168(160.5)	5.0	-	-	@220	33°19'28.4"N 125°55'18.5"E	-	RNAV 1	Bank angle 25°
016	TF	PIMIK	-	151(143.6)	5.0	-	@9 000	@220	33°15'26.4"N 125°58'50.7"E	-	RNAV 1	Bank angle 25°
017	TF	YUMIN	-	053(045.2)	17.0	-	+4 000	@195	33°27'25.7"N 126°13'15.5"E	-	RNAV 1	IAF

Change : Information of course/track and speed restriction.

JEJU/Jeju Intl(RKPC)
RWY 07
HOLDING PROCEDURE

AERONAUTICAL DATA TABULATION

Standard Instrument Arrival Procedure Coding Tables

HOLDING PROCEDURE

Holding Identification	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Time (min)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
RNAV DOTOL 2P	HM	MANBA	Y	047(038.9)	1.5	L	-13 000 +9 000	-250	33°43'39.9"N 126°19'24.0"E	-	RNAV 1	-
	HM	YUMIN	Y	126(118.3)	1.0	L	-7 000 +4 000	-230	33°27'25.7"N 126°13'15.5"E	-	RNAV 1	-
RNAV UPGOS 1P	HM	MANBA	Y	047(038.9)	1.5	L	-13 000 +9 000	-250	33°43'39.9"N 126°19'24.0"E	-	RNAV 1	-
	HM	YUMIN	Y	126(118.3)	1.0	L	-7 000 +4 000	-230	33°27'25.7"N 126°13'15.5"E	-	RNAV 1	-
RNAV TAMNA 2P	HM	CJU	Y	269(261.9)	1.5	L	-FL 160 +12 000	-250	33°23'04.6"N 126°37'26.8"E	-	RNAV 1	-
	HM	MANBA	Y	047(038.9)	1.5	L	-13 000 +9 000	-250	33°43'39.9"N 126°19'24.0"E	-	RNAV 1	-
	HM	YUMIN	Y	126(118.3)	1.0	L	-7 000 +4 000	-230	33°27'25.7"N 126°13'15.5"E	-	RNAV 1	-
RNAV TOSAN 2P	HM	CJU	Y	269(261.9)	1.5	L	-FL 160 +12 000	-250	33°23'04.6"N 126°37'26.8"E	-	RNAV 1	-
	HM	MANBA	Y	047(038.9)	1.5	L	-13 000 +9 000	-250	33°43'39.9"N 126°19'24.0"E	-	RNAV 1	-
	HM	YUMIN	Y	126(118.3)	1.0	L	-7 000 +4 000	-230	33°27'25.7"N 126°13'15.5"E	-	RNAV 1	-
RNAV SOSDO 2P	HM	CJU	Y	269(261.9)	1.5	L	-FL 160 +12 000	-250	33°23'04.6"N 126°37'26.8"E	-	RNAV 1	-
	HM	MANBA	Y	047(038.9)	1.5	L	-13 000 +9 000	-250	33°43'39.9"N 126°19'24.0"E	-	RNAV 1	-
	HM	YUMIN	Y	126(118.3)	1.0	L	-7 000 +4 000	-230	33°27'25.7"N 126°13'15.5"E	-	RNAV 1	-
RNAV LIMDI 1P	HM	CJU	Y	269(261.9)	1.5	L	-FL 160 +12 000	-250	33°23'04.6"N 126°37'26.8"E	-	RNAV 1	-
	HM	MANBA	Y	047(038.9)	1.5	L	-13 000 +9 000	-250	33°43'39.9"N 126°19'24.0"E	-	RNAV 1	-
	HM	YUMIN	Y	126(118.3)	1.0	L	-7 000 +4 000	-230	33°27'25.7"N 126°13'15.5"E	-	RNAV 1	-

Change : Information of course/track.

INTENTIONALLY

LEFT

BLANK


STANDARD ARRIVAL CHART INSTRUMENT (STAR) - ICAO

Note : Arrival under ICAO Flight Procedures.

TRANSITION ALT 14 000
TRANSITION LVL FL 140

JEJU	APP	121.2 124.05
JEJU	TWR	118.2 118.55

JEJU/Jeju Intl(RKPC)
RWY 25
RNAV DOTOL 2M, RNAV UPGOS 2M
RNAV TAMNA 2M, RNAV TOSAN 2M
RNAV SOSDO 2M, RNAV LIMDI 2M

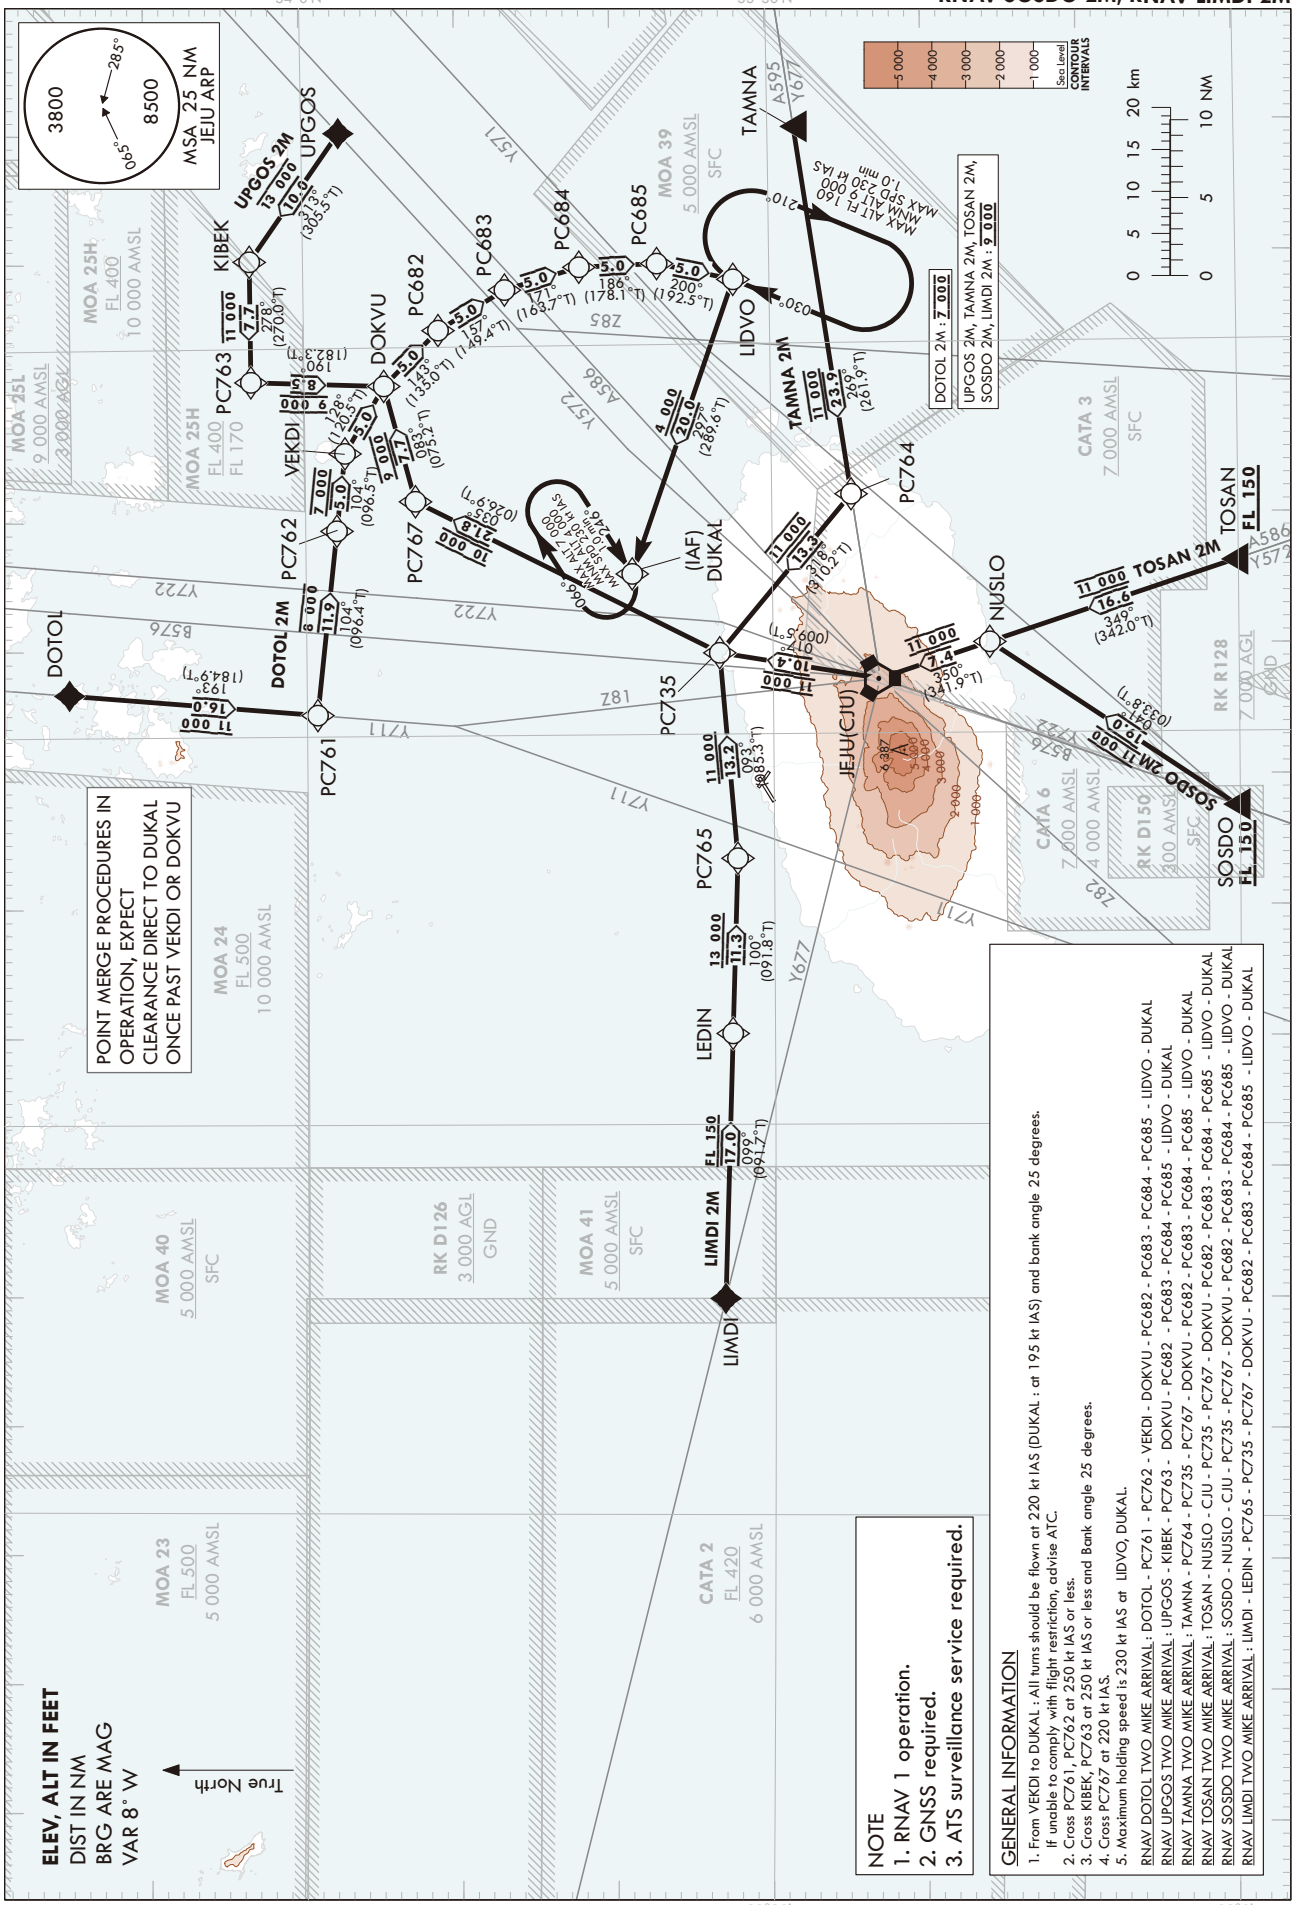

Change : Improved clarity such as terrain.

Standard Instrument Arrival Procedure Coding Tables

RNAV DOTOL 2M

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	DOTOL	-	-	-	-	-	-	34°15'15.4"N 126°36'36.6"E	-	RNAV 1	-
002	TF	PC761	-	193(184.9)	16.0	-	-11 000	-250	33°59'17.3"N 126°34'57.1"E	-	RNAV 1	-
003	TF	PC762	-	104(096.4)	11.9	-	-8 000	-250	33°57'56.9"N 126°49'10.5"E	-	RNAV 1	-
004	TF	VEKDI	-	104(096.5)	5.0	-	@7 000	@220	33°57'22.6"N 126°55'08.8"E	-	RNAV 1	Bank angle 25°
005	TF	DOKVU	-	128(120.5)	5.0	-	-	@220	33°54'49.8"N 127°00'19.2"E	-	RNAV 1	Bank angle 25°
006	TF	PC682	-	143(135.0)	5.0	-	-	@220	33°51'17.4"N 127°04'34.2"E	-	RNAV 1	Bank angle 25°
007	TF	PC683	-	157(149.4)	5.0	-	-	@220	33°46'58.8"N 127°07'37.7"E	-	RNAV 1	Bank angle 25°
008	TF	PC684	-	171(163.7)	5.0	-	-	@220	33°42'10.3"N 127°09'18.3"E	-	RNAV 1	Bank angle 25°
009	TF	PC685	-	186(178.1)	5.0	-	-	@220	33°37'09.9"N 127°09'30.1"E	-	RNAV 1	Bank angle 25°
010	TF	LIDVO	-	200(192.5)	5.0	-	@7 000	@220	33°32'16.4"N 127°08'12.5"E	-	RNAV 1	Bank angle 25°
011	TF	DUKAL	-	297(289.6)	20.0	-	+4 000	@195	33°38'58.6"N 126°45'38.8"E	-	RNAV 1	IAF

RNAV UPGOS 2M

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	UPGOS	-	-	-	-	-	-	33°57'33.3"N 127°19'53.0"E	-	RNAV 1	-
002	TF	KIBEK	-	313(305.5)	10.0	-	-13 000	-250	34°03'22.7"N 127°10'02.9"E	-	RNAV 1	Bank angle 25°
003	TF	PC763	-	278(270.0)	7.7	-	-11 000	-250	34°03'22.6"N 127°00'43.6"E	-	RNAV 1	Bank angle 25°
004	TF	DOKVU	-	190(182.3)	8.5	-	@9 000	@220	33°54'49.8"N 127°00'19.2"E	-	RNAV 1	**Bank angle 25°**
005	TF	PC682	-	143(135.0)	5.0	-	-	@220	33°51'17.4"N 127°04'34.2"E	-	RNAV 1	**Bank angle 25°**
006	TF	PC683	-	157(149.4)	5.0	-	-	@220	33°46'58.8"N 127°07'37.7"E	-	RNAV 1	**Bank angle 25°**
007	TF	PC684	-	171(163.7)	**5.0**	-	-	@220	33°42'10.3"N 127°09'18.3"E	-	RNAV 1	**Bank angle 25°**
008	TF	PC685	-	186(178.1)	**5.0**	-	-	@220	33°37'09.9"N 127°09'30.1"E	-	RNAV 1	**Bank angle 25°**
009	TF	LIDVO	-	200(192.5)	**5.0**	-	@9 000	@220	33°32'16.4"N 127°08'12.5"E	-	RNAV 1	**Bank angle 25°**
010	TF	DUKAL	-	297(289.6)	20.0	-	+4 000	@195	33°38'58.6"N 126°45'38.8"E	-	RNAV 1	IAF

JEJU/Jeju Intl(RKPC)
RWY 25
RNAV TAMNA 2M, RNAV TOSAN 2M

AERONAUTICAL DATA TABULATION

Standard Instrument Arrival Procedure Coding Tables

RNAV TAMNA 2M

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	TAMNA	-	-	-	-	-	-	33°28'15.5"N 127°19'53.0"E	-	RNAV 1	-
002	TF	PC764	-	269(261.9)	23.9	-	@11 000	-	33°24'50.2"N 126°51'37.6"E	-	RNAV 1	-
003	TF	PC735	-	318(310.2)	13.3	-	@11 000	-	33°33'23.5"N 126°39'30.8"E	-	RNAV 1	-
004	TF	PC767	-	035(026.9)	21.8	-	@10 000	@220	33°52'52.52"N 126°51'23.2"E	-	RNAV 1	-
005	TF	DOKVU	-	083(075.2)	7.7	-	@9 000	@220	33°54'49.8"N 127°00'19.2"E	-	RNAV 1	Bank angle 25°
006	TF	PC682	-	143(135.0)	5.0	-	-	@220	33°51'17.4"N 127°04'34.2"E	-	RNAV 1	Bank angle 25°
007	TF	PC683	-	157(149.4)	5.0	-	-	@220	33°46'58.8"N 127°07'37.7"E	-	RNAV 1	Bank angle 25°
008	TF	PC684	-	171(163.7)	**5.0**	-	-	@220	33°42'10.3"N 127°09'18.3"E	-	RNAV 1	Bank angle 25°
009	TF	PC685	-	186(178.1)	**5.0**	-	-	@220	33°37'09.9"N 127°09'30.1"E	-	RNAV 1	Bank angle 25°
010	TF	LIDVO	-	200(192.5)	**5.0**	-	@9 000	@220	33°32'16.4"N 127°08'12.5"E	-	RNAV 1	Bank angle 25°
011	TF	DUKAL	-	297(289.6)	20.0	-	+4 000	@195	33°38'58.6"N 126°45'38.8"E	-	RNAV 1	IAF

RNAV TOSAN 2M

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	TOSAN	-	-	-	-	+FL 150	-	33°00'12.0"N 126°46'18.7"E	-	RNAV 1	-
002	TF	NUSLO	-	349(342.0)	16.6	-	@11 000	-	33°16'00.2"N 126°40'11.8"E	-	RNAV 1	-
003	TF	CJU	-	350(341.9)	7.4	-	@11 000	-	33°23'04.6"N 126°37'26.8"E	-	RNAV 1	-
004	TF	PC735	-	017(009.5)	10.4	-	@11 000	-	33°33'23.5"N 126°39'30.8"E	-	RNAV 1	-
005	TF	PC767	-	035(026.9)	21.8	-	@10 000	@220	33°52'52.52"N 126°51'23.2"E	-	RNAV 1	-
006	TF	DOKVU	-	083(075.2)	7.7	-	@9 000	@220	33°54'49.8"N 127°00'19.2"E	-	RNAV 1	Bank angle 25°
007	TF	PC682	-	143(135.0)	5.0	-	-	@220	33°51'17.4"N 127°04'34.2"E	-	RNAV 1	Bank angle 25°
008	TF	PC683	-	157(149.4)	5.0	-	-	@220	33°46'58.8"N 127°07'37.7"E	-	RNAV 1	Bank angle 25°
009	TF	PC684	-	171(163.7)	**5.0**	-	-	@220	33°42'10.3"N 127°09'18.3"E	-	RNAV 1	Bank angle 25°
010	TF	PC685	-	186(178.1)	**5.0**	-	-	@220	33°37'09.9"N 127°09'30.1"E	-	RNAV 1	Bank angle 25°
011	TF	LIDVO	-	200(192.5)	**5.0**	-	@9 000	@220	33°32'16.4"N 127°08'12.5"E	-	RNAV 1	Bank angle 25°
012	TF	DUKAL	-	297(289.6)	20.0	-	+4 000	@195	33°38'58.6"N 126°45'38.8"E	-	RNAV 1	IAF

Change : Information of standard instrument arrival procedure for RWY 25.

JEJU/Jeju Intl(RKPC)
RWY 25
RNAV SOSDO 2M, RNAV LIMDI 2M

AERONAUTICAL DATA TABULATION

Standard Instrument Arrival Procedure Coding Tables

RNAV SOSDO 2M

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	SOSDO	-	-	-	-	+FL 150	-	33°00'12.0"N 126°27'35.0"E	-	RNAV 1	-
002	TF	NUSLO	-	041(033.8)	19.0	-	@11 000	-	33°16'00.2"N 126°40'11.8"E	-	RNAV 1	-
003	TF	CJU	-	350(341.9)	7.4	-	@11 000	-	33°23'04.6"N 126°37'26.8"E	-	RNAV 1	-
004	TF	PC735	-	017(009.5)	10.4	-	@11 000	-	33°33'23.5"N 126°39'30.8"E	-	RNAV 1	-
005	TF	PC767	-	035(026.9)	21.8	-	@10 000	@220	33°52'52.52"N 126°51'23.2"E	-	RNAV 1	-
006	TF	DOKVU	-	083(075.2)	7.7	-	@9 000	@220	33°54'49.8"N 127°00'19.2"E	-	RNAV 1	Bank angle 25°
007	TF	PC682	-	143(135.0)	5.0	-	-	@220	33°51'17.4"N 127°04'34.2"E	-	RNAV 1	Bank angle 25°
008	TF	PC683	-	157(149.4)	5.0	-	-	@220	33°46'58.8"N 127°07'37.7"E	-	RNAV 1	Bank angle 25°
009	TF	PC684	-	171(163.7)	5.0	-	-	@220	33°42'10.3"N 127°09'18.3"E	-	RNAV 1	Bank angle 25°
010	TF	PC685	-	186(178.1)	5.0	-	-	@220	33°37'09.9"N 127°09'30.1"E	-	RNAV 1	Bank angle 25°
011	TF	LIDVO	-	200(192.5)	5.0	-	@9 000	@220	33°32'16.4"N 127°08'12.5"E	-	RNAV 1	Bank angle 25°
012	TF	DUKAL	-	297(289.6)	20.0	-	+4 000	@195	33°38'58.6"N 126°45'38.8"E	-	RNAV 1	IAF

RNAV LIMDI 2M

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	LIMDI	-	-	-	-	-	-	33°33'13.3"N 125°49'53.0"E	-	RNAV 1	-
002	TF	LEDIN	-	099(091.7)	17.0	-	+FL 150	-	33°32'42.1"N 126°10'14.9"E	-	RNAV 1	-
003	TF	PC765	-	100(091.8)	11.3	-	+13 000	-	33°32'19.6"N 126°23'42.6"E	-	RNAV 1	-
004	TF	PC735	-	093(085.3)	13.2	-	+11 000	-	33°33'23.5"N 126°39'30.8"E	-	RNAV 1	-
005	TF	PC767	-	035(026.9)	21.8	-	@10 000	@220	33°52'52.52"N 126°51'23.2"E	-	RNAV 1	-
006	TF	DOKVU	-	083(075.2)	7.7	-	@9 000	@220	33°54'49.8"N 127°00'19.2"E	-	RNAV 1	Bank angle 25°
007	TF	PC682	-	143(135.0)	5.0	-	-	@220	33°51'17.4"N 127°04'34.2"E	-	RNAV 1	Bank angle 25°
008	TF	PC683	-	157(149.4)	5.0	-	-	@220	33°46'58.8"N 127°07'37.7"E	-	RNAV 1	Bank angle 25°
009	TF	PC684	-	171(163.7)	5.0	-	-	@220	33°42'10.3"N 127°09'18.3"E	-	RNAV 1	Bank angle 25°
010	TF	PC685	-	186(178.1)	5.0	-	-	@220	33°37'09.9"N 127°09'30.1"E	-	RNAV 1	Bank angle 25°
011	TF	LIDVO	-	200(192.5)	5.0	-	@9 000	@220	33°32'16.4"N 127°08'12.5"E	-	RNAV 1	Bank angle 25°
012	TF	DUKAL	-	297(289.6)	20.0	-	+4 000	@195	33°38'58.6"N 126°45'38.8"E	-	RNAV 1	IAF

Change : Information of standard instrument arrival procedure for RWY 25.

JEJU/Jeju Intl(RKPC)
RWY 25
HOLDING PROCEDURE

AERONAUTICAL DATA TABULATION

Standard Instrument Arrival Procedure Coding Tables

HOLDING PROCEDURE

Holding Identification	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Time (min)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
RNAV DOTOL 2M	HM	LIDVO	Y	030(022.5)	1.0	R	-FL 160 +9 000	-230	33°32'16.4"N 127°08'12.5"E	-	RNAV 1	-
	HM	DUKAL	Y	246(238.7)	1.0	R	-7 000 +4 000	-230	33°38'58.6"N 126°45'38.8"E	-	RNAV 1	-
RNAV UPGOS 2M	HM	LIDVO	Y	030(022.5)	1.0	R	-FL 160 +9 000	-230	33°32'16.4"N 127°08'12.5"E	-	RNAV 1	-
	HM	DUKAL	Y	246(238.7)	1.0	R	-7 000 +4 000	-230	33°38'58.6"N 126°45'38.8"E	-	RNAV 1	-
RNAV TAMNA 2M	HM	LIDVO	Y	030(022.5)	1.0	R	-FL 160 +9 000	-230	33°32'16.4"N 127°08'12.5"E	-	RNAV 1	-
	HM	DUKAL	Y	246(238.7)	1.0	R	-7 000 +4 000	-230	33°38'58.6"N 126°45'38.8"E	-	RNAV 1	-
RNAV TOSAN 2M	HM	LIDVO	Y	030(022.5)	1.0	R	-FL 160 +9 000	-230	33°32'16.4"N 127°08'12.5"E	-	RNAV 1	-
	HM	DUKAL	Y	246(238.7)	1.0	R	-7 000 +4 000	-230	33°38'58.6"N 126°45'38.8"E	-	RNAV 1	-
RNAV SOSDO 2M	HM	LIDVO	Y	030(022.5)	1.0	R	-FL 160 +9 000	-230	33°32'16.4"N 127°08'12.5"E	-	RNAV 1	-
	HM	DUKAL	Y	246(238.7)	1.0	R	-7 000 +4 000	-230	33°38'58.6"N 126°45'38.8"E	-	RNAV 1	-
RNAV LIMDI 2M	HM	LIDVO	Y	030(022.5)	1.0	R	-FL 160 +9 000	-230	33°32'16.4"N 127°08'12.5"E	-	RNAV 1	-
	HM	DUKAL	Y	246(238.7)	1.0	R	-7 000 +4 000	-230	33°38'58.6"N 126°45'38.8"E	-	RNAV 1	-

Change : Information of standard instrument arrival procedure for RWY 25.

INTENTIONALLY

LEFT

BLANK