


**VISUAL
APPROACH
CHART - ICAO**

AERODROME ELEV 13 FT
HEIGHTS RELATED TO
THR RWY 18R ELEV 13 FT

GIMHAE APP	125.5	135.7
GIMHAE TWR	118.1	118.45

BUSAN/Gimhae Intl(RKPK)

**TUSRA Visual
RWY 18R**

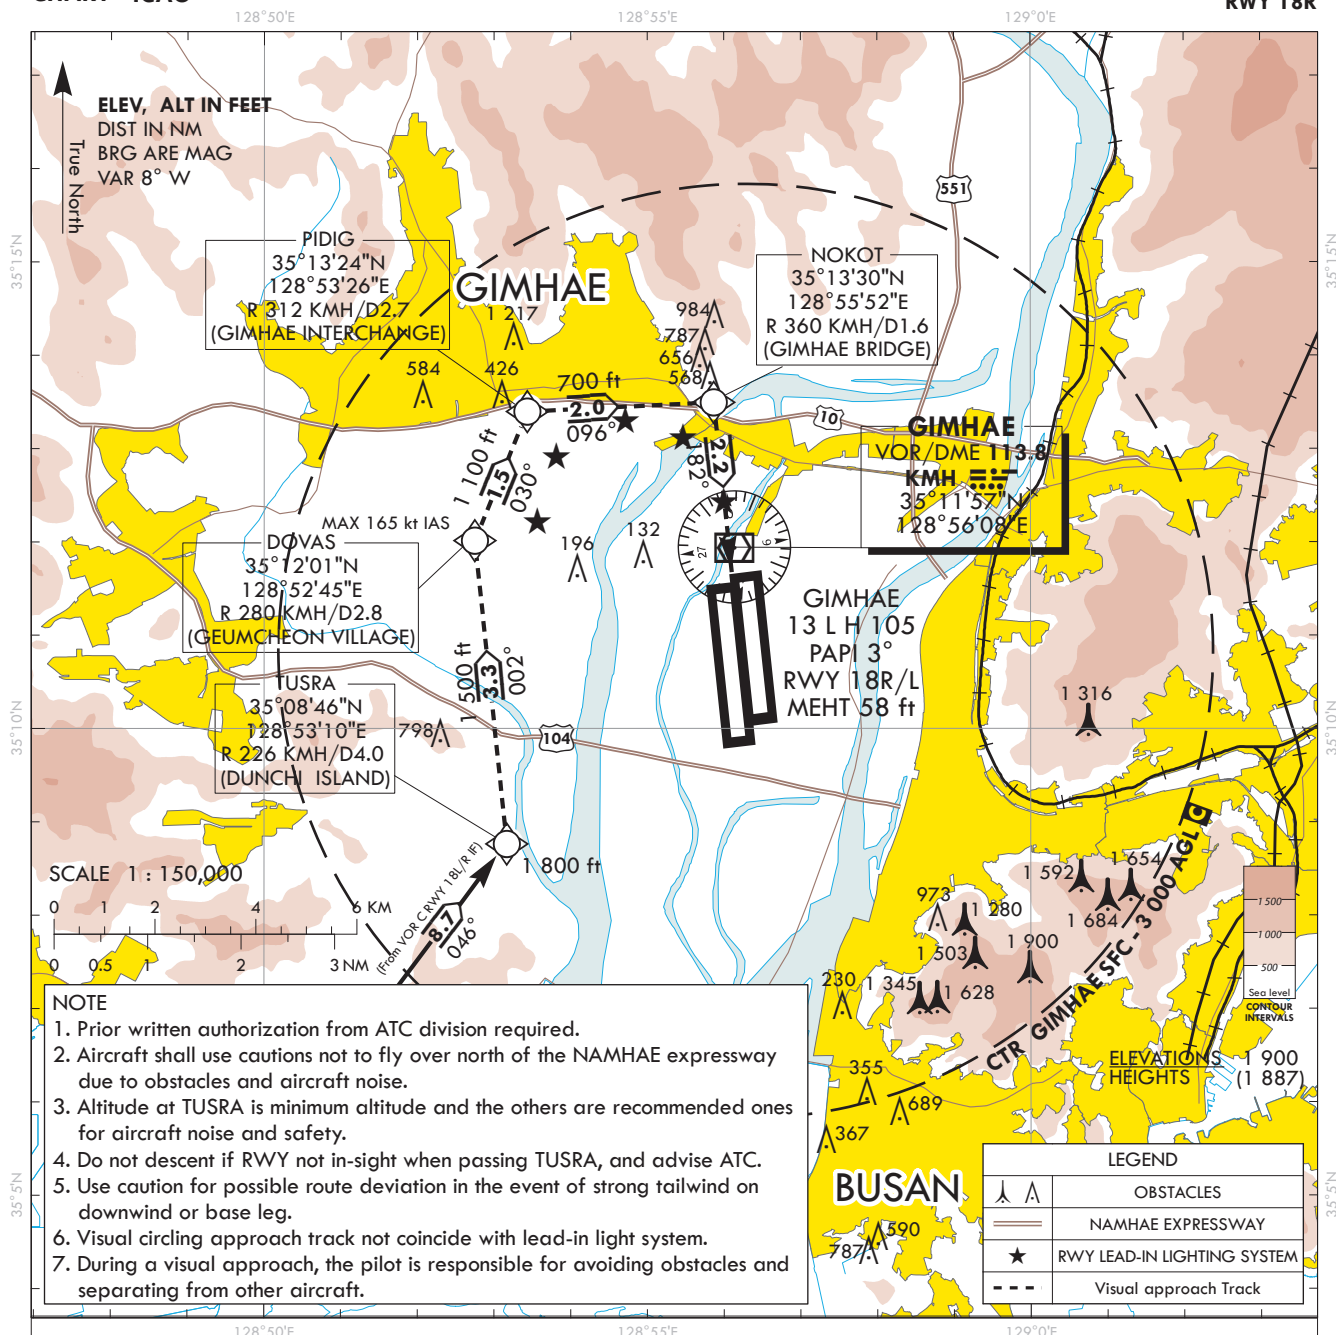

VISUAL PROCEDURE

WEATHER MINIMUMS : CEILING 1 800 ft, VISIBILITY 5 km

GO-AROUND PROCEDURE : In the event of a go-around,
1. Before passing DOVAS : Fly HDG 310, climb to 6 000 ft then RADAR vector.

2. After passing DOVAS : Climb to 6 000 ft on the visual circling track to RWY 18R until receiving ATC instructions. Remain south of the NAMHAE expressway at all time.

GENERAL INFORMATION

1. This visual procedure is performed after runway in-sight during a VOR C RWY 18L/R approach.
2. RNAV is lateral guidance reference only and if unable to maintain visual contact with preceding aircraft or visual references, maintain 1 800 ft and report ATC as practical as possible.
3. NON-RNAV equipped aircraft may fly this procedure by referencing visual references.
4. Aircraft may proceed visually via depicted visual track after passing TUSRA at or 1 800 ft then proceed to DOVAS then PIDIG then NOKOT then RWY 18R.
5. Use caution not to inadvertently land on 18L.


Change : Establishment of visual approach procedure for RWY 18R.

VISUAL
APPROACH
CHART - ICAO

AD ELEV 13 ft
HEIGHTS RELATED
TO AD ELEV

GIMHAE	APP	125.5	364.0
GIMHAE	DEP	125.5	363.8
GIMHAE	TWR	118.1	118.450

BUSAN/Gimhae

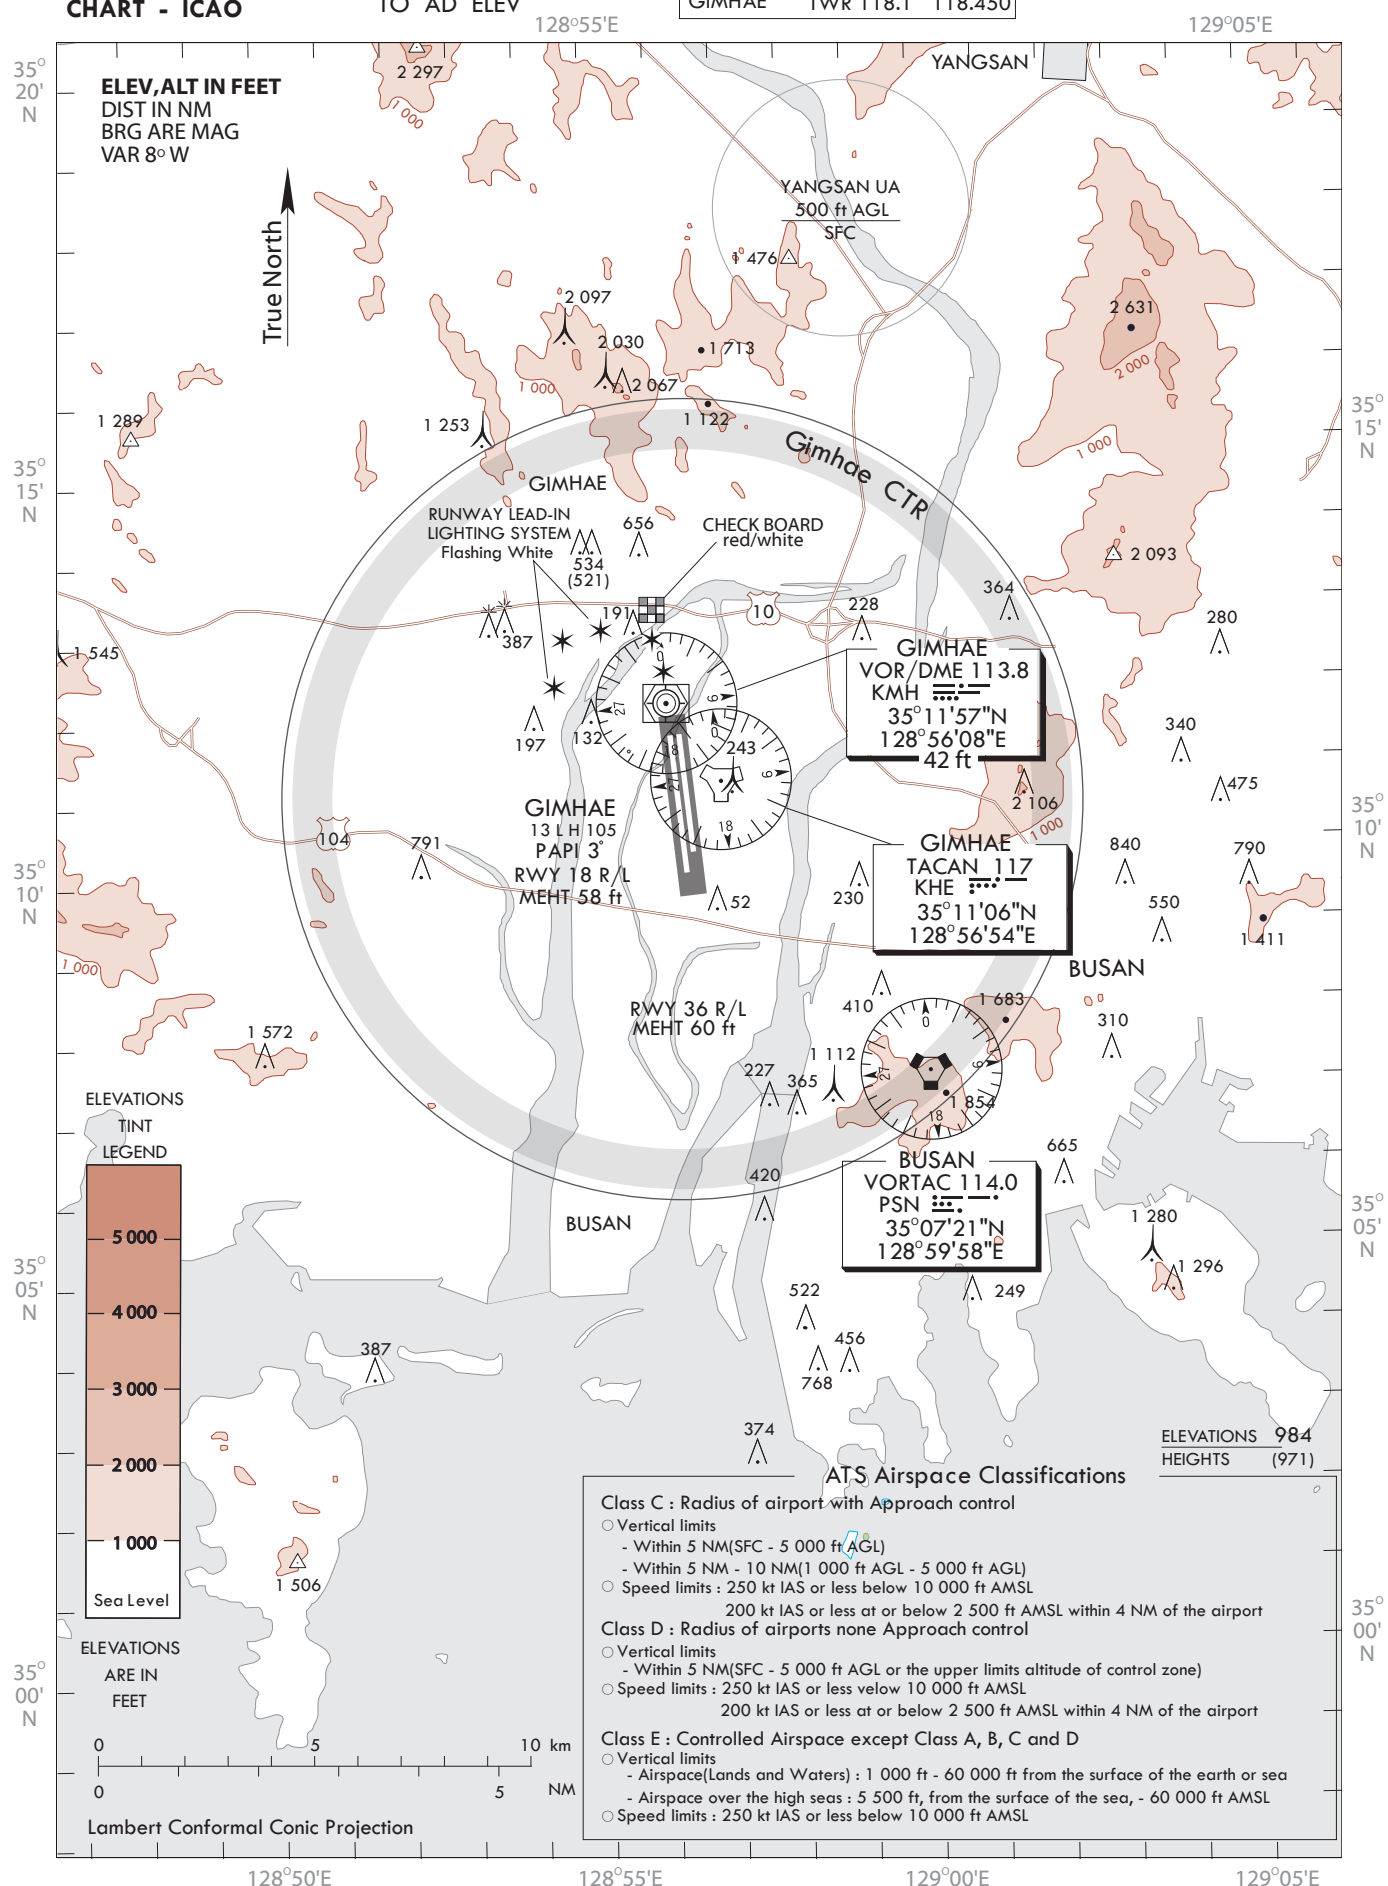

Change : Page control.