

RKTH AD 2.1 AERODROME LOCATION INDICATOR AND NAME

RKTH - POHANG GYEONGJU/Domestic

RKTH AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

1	ARP coordinates and site at AD	355916N 1292507E 98° / 908 m from THR 10
2	Direction and distance from city	125°, 8 km from Pohang City Hall
3	Elevation/Reference temperature	23 m / 31.3°C
4	Geoid undulation at AD ELEV PSN	29 m
5	MAG VAR/Annual change	9° W (2025) / 0.040° Increasing
6	Aerodrome Operator, Address, Telephone, Telefax, AFS	KAC Korea Airports Corporation(Pohang Gyeongju Airport) 18, Ilwol-ro, Donghae-myeon, Nam-gu, Pohang-si, Gyeongsangbuk-do, 37926, Republic of Korea TEL : +82-54-289-7314 Telefax : +82-54-289-7366 AFS : RKTHZPZX ROKN Republic of Korea Navy(ROKN) Naval Air Command
7	Type of traffic permitted(IFR/VFR)	IFR/VFR
8	Remarks	NIL

RKTH AD 2.3 OPERATIONAL HOURS

1	Aerodrome Operator	2200-1300 UTC
2	Customs and Immigration	NIL
3	Health and Sanitation	NIL
4	AIS Briefing Office	See GEN 3.1
5	ATS Reporting Office(ARO)	0000-1120 UTC
6	MET Briefing Office	H24
7	ATS	H24
8	Fuelling	HO
9	Handling	HO
10	Security	HO
11	De-icing	HO
12	Remarks	NIL

RKTH AD 2.4 HANDLING SERVICES AND FACILITIES

1	Cargo handling facilities	NIL
2	Fuel/oil types	JP-8, 0-128(Available by agreement with ROKN)
3	Fuelling facilities/capacity	NIL
4	De-icing facilities	One de-icing pad (Aircraft stand NR 4) (See Aircraft Parking/Docking Chart)
5	Hangar space for visiting aircraft	NIL
6	Repair facilities for visiting aircraft	NIL
7	Remarks	NIL

Change : Information of operational hours for AIS briefing office.

RKTH AD 2.5 PASSENGER FACILITIES

1	Hotels	Hotel in Pohang city
2	Restaurants	Yes
3	Transportation	Buses, taxis, and rental cars
4	Medical facilities	Hospitals in Pohang city, 11 km
5	Bank and Post Office	NIL
6	Tourist Office	HO
7	Remarks	http://www.airport.co.kr/mbs/pohang/

RKTH AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

1	AD Category for fire fighting	Category 7
2	Rescue equipment	a. 5 Chemical crash rescue & fire fighting trucks - Total capacity - Water : 32 200 L - AFFF : 3 600 L b. 3 Supplementary water tank trucks : Total capacity 18 000 L c. 1 Rescue truck d. 1 Ambulance
3	Capability for removal of disabled aircraft	Specialized aircraft recovery equipment available for up to and including B737-800 size aircraft. 270 ton crane and other accessory equipment can be provided by airlines and agencies. Korea Airports Corporation is the co-ordinator for the removal of disabled aircraft and can be reached at Airport Duty Manager. (TEL : +82-54-289-7312~7317)
4	Remarks	NIL

RKTH AD 2.7 SEASONAL AVAILABILITY - CLEARING

1	Type of clearing equipment	a. ROKN* : 4 Dump trucks b. KAC** : 1 Multipurpose snow removal truck, 1 Tractor, 1 Snow plough, 1 Thawing material spreader
2	Clearance priorities	a. RWY 10/28 b. TWY c. Apron
3	Remarks	Snow clearance information promulgated by SNOWTAM * Republic of Korea Navy(ROKN) ** Korea Airports Corporation(KAC)

RKTH AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS/POSITIONS DATA

1	Designation, Apron surface and strength	a. Surface : Concrete b. Strength : PCR 633 R/B/W/T
2	Designation, Taxiway width, surface and strength	a. Width : 22.1-28.4 m(C1), 36 m(C2), 45 m(S1), 76 m(S5), 23 m(SP), 23 m(S2~S4) b. Surface : Concrete c. Strength : PCR 633 R/B/W/T(SP, S1~S5, C1, C2)
3	Altimeter check location and elevation	a. Location : Aircraft stand NR. 4 b. Elevation : 20 m
4	Location of VOR checkpoints	NIL
5	VOR/INS check points	INS checkpoint : EV specified stands (Refer to Aircraft Parking & Docking chart)
6	Remarks	NIL

RKTH AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

1	Use of aircraft stand ID signs, TWY guidelines and visual docking/parking guidance system of aircraft stands	a. Taxiing guidance signs are the intersections of all TWY and RWY and holding positions b. Guide line at apron c. Nose-in guidance at aircraft stands
2	RWY and TWY markings and LGT	a. RWY : RWY 10/28 - Edge, THR, END b. TWY : TWY edge lights - All TWY
3	Stop bars	NIL
4	Remarks	NIL

RKTH AD 2.10 AERODROME OBSTACLES

In Area 2					
OBST ID/ Designation	OBST type	OBST position	ELEV/HGT	Markings/ Type, colour	Remarks
a	b	c	d	e	f
RKTHOB001	Natural High Point	355838.4N 1292314.8E	315 ft/	NIL	10/APCH 28/TKOF
RKTHOB002	Pylon	355855.9N 1292226.7E	351 ft/	Marked/LGTD	
RKTHOB003	Natural High Point	355808.6N 1291935.0E	617 ft/	NIL	
RKTHOB004	Natural High Point	355822.2N 1291909.0E	753 ft/	NIL	
RKTHOB005	Natural High Point	355917.0N 1291740.1E	858 ft/	NIL	
RKTHOB006	Natural High Point	360909.1N 1291337.6E	2 500 ft/	NIL	
RKTHOB007	Natural High Point	355917.2N 1291740.8E	844 ft/	NIL	
RKTHOB008	Natural High Point	355915.6N 1292336.2E	196 ft/	NIL	
RKTHOB009	Natural High Point	355915.5N 1292327.4E	217 ft/	NIL	
RKTHOB010	Natural High Point	355803.2N 1292623.7E	492 ft/	NIL	In 10/28 circling area and at AD
RKTHOB011	Natural High Point	355759.6N 1292623.9E	534 ft/	NIL	
RKTHOB012	Natural High Point	355857.1N 1292757.2E	591 ft/	NIL	
RKTHOB013	Antenna	355840.1N 1292831.2E	930 ft/34 ft	Marked/LGTD	28/APCH 10/TKOF 20:1 Obstacle identification surface(OIS) is penetrated by the obstacles. (RKTHOB019, 020, 021 on final RWY 28)
RKTHOB014	Navaid	355838.0N 1292828.3E	929 ft/125 ft	Marked/LGTD	
RKTHOB015	Antenna	355832.2N 1292822.3E	841 ft/	Marked/LGTD	
RKTHOB016	Antenna	355833.5N 1292820.8E	856 ft/	Marked/LGTD	
RKTHOB017	Natural High Point	355929.1N 1292742.1E	492 ft/	NIL	
RKTHOB018	Natural High Point	355905.1N 1292831.4E	663 ft/	NIL	
RKTHOB019	Pylon	355928.3N 1292742.1E	540 ft/	Marked/LGTD	
RKTHOB020	Pylon	355932.2N 1292747.0E	563 ft/	Marked/LGTD	
RKTHOB021	Pylon	355905.1N 1292831.4E	722 ft/	Marked/LGTD	
In Area 3					
OBST ID/ Designation	OBST type	OBST position	ELEV/HGT	Markings/ Type, colour	Remarks
a	b	c	d	e	f
NIL					

Change : Withdrawal of OBST(RKTHOB022).

RKTH AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

1	Associated MET Office	Pohang-Gyeongju Navy MET Office
2	Hours of service MET Office outside hours	24 hours -
3	Office responsible for TAF preparation Periods of validity	ROKN MET Office 30 hours at 0000, 0600, 1200, 1800 UTC
4	Type forecast Interval of issuance	NIL
5	Briefing/consultation provided	Available by the phone at Aviation Meteorological Office for 24 hours.
6	Flight documentation Language(s) used	AD forecasts(TAF code form), SIGWX charts, WITEM charts, SIGMET information in English
7	Charts and other information available for briefing or consultation	Analysis charts(surface and upper air), Prognostic charts, Graphic displays, significant weather charts(high, medium, low) and other model outputs
8	Supplementary equipment available for providing information	Satellite and weather radar imageries
9	ATS units provided with information	FIC and TWR
10	Additional information(limitation of service etc.)	All observation data, model outputs and forecasts produced by KMA and WAFS are available at the Office through Internet link.

RKTH AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

Designations Runway NR	TRUE BRG	Dimension of RWY(m)	Strength(PCR) and surface of RWY and SWY	THR coordinates RWY end coordinates THR geoid undulation	THR elevation and highest elevation of TDZ of precision APP RWY
1	2	3	4	5	6
10	089.23°	2 133 × 46	633 R/B/W/T Concrete	355916.12N 1292430.75E GUND 29 m	THR 23 m / 76 ft TDZ 23 m / 76 ft
28	269.25°	2 133 × 46	633 R/B/W/T Concrete	355917.04N 1292555.91E GUND 29 m	THR 19 m / 62 ft TDZ 21 m / 70 ft

7. Slope of RWY-SWY

Designations Runway NR	SWY dimensions (m)	CWY dimensions (m)	Strip dimensions (m)	RESA dimensions (m)	Location & description of arresting system	OFZ	Remarks
1	8	9	10	11	12	13	14
10	NIL	NIL	2 253 × 300	92 × 150	NIL	NIL	- The width of the southern strip is 139~145 m, from the western edge of the strip to 90 m. - The width of the northern strip is 134~141 m, from the eastern edge of the strip to 198 m.
28	NIL	NIL	2 253 × 300	92 × 150	NIL	NIL	- The runway surface is grooved except 300 m inward from each runway THR, and an additional 300 m of runway centerline 15.24 m in width.

Change : Information of name of MET office and meteorological information provided.



RKTH AD 2.13 DECLARED DISTANCES

RWY Designator	TORA (m)	TODA (m)	ASDA (m)	LDA (m)	Remarks
1	2	3	4	5	6
10	2 133	2 133	2 133	2 133	NIL
28	2 133	2 133	2 133	2 133	NIL

RKTH AD 2.14 APPROACH AND RUNWAY LIGHTING

RWY Designator	APCH LGT type LEN INTST	THR LGT Colour WBAR	VASIS (MEHT) PAPI	TDZ LGT LEN	RWY Center line LGT Length, spacing, colour, INTST	RWY edge LGT LEN,spacing colour INTST	RWY End LGT colour WBAR	SWY LGT LEN(m) colour
1	2	3	4	5	6	7	8	9
10	ALSF-1 720 m LIH	Green	PAPI Both / 3.0°	NIL	NIL	2 134 m 60 m White LIH	Red	NIL
28	SSALF 420 m	Green	PAPI Both / 3.5°	NIL	NIL	2 134 m 60 m White LIH	Red	NIL
10. Remarks PAPI on RWY 28 does not provide obstacle clearance over the terrain during final APCH.								

RKTH AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	ABN/IBN location, characteristics and hours of operation	ABN : At TWR building, FLG W/G EV 2.5 SEC IBN : NIL H24
2	LDI location and LGT Anemometer location and LGT	NIL
3	TWY edge and center line lighting	Edge : All TWY Center line LGT : NIL
4	Secondary power supply/switch-over Time	SRY power supply available Switch-over time : 10 SEC
5	Remarks	NIL

RKTH AD 2.16 HELICOPTER LANDING AREA

1	Coordinates TLOF or THR of FATO Geoid undulation	To be developed
2	TLOF and/or FATO elevation m/ft	-
3	TLOF and FATO area dimensions, surface, strength, marking	-
4	True BRG of FATO	-
5	Declared distance available	-
6	APP and FATO lighting	-
7	Remarks	As directed by ATC

RKTH AD 2.17 ATS AIRSPACE

1	Designation and lateral limit	Pohang CTR A circle, radius 5 NM centered at ARP
2	Vertical limits	SFC to 3 000 ft AGL
3	Airspace classification	C
4	ATS unit call sign Languages	Pohang Tower English / Korean
5	Transition altitude	14 000 ft AMSL
6	Operational hours	H24
7	Remarks	NIL

RKTH AD 2.18 ATS COMMUNICATION FACILITIES

Service designation	Call sign	Channel	Hours of operation	Remarks
1	2	3	4	5
APP	Pohang Approach	124.25 MHz 120.2 MHz 232.4 MHz	H24	NIL
ARR	Pohang Arrival	134.1 MHz 133.4 MHz 300.3 MHz 310.6 MHz	H24	NIL
TWR	Pohang Tower	118.05 MHz 236.6 MHz 308.5 MHz	H24	NIL
GND	Pohang Ground	126.2 MHz 275.8 MHz	H24	NIL
ATIS	Pohang Gyeongju Airport	127.4 MHz 317.375 MHz	2100-1200 UTC	NIL
EMERG		121.5 MHz 243.0 MHz	H24	NIL
Scheduled Inspection time : - APP(124.25 MHz), TWR(118.05 MHz) and ATIS : Every 2nd TUE(1400-1700 UTC) of the month				

RKTH AD 2.19 RADIO NAVIGATION AND LANDING AIDS

Type of aid, MAG VAR, Type of supported OPS (for VOR/ILS/MLS, give declination)	ID	Frequency	Hours of operation	Position of transmitting antenna coordinates	Elevation of DME transmitting antenna	Remarks
1	2	3	4	5	6	7
VORTAC (9° W/2025)	NPH	109.6 MHz (CH 33X)	H24	355910.9N 1292431.8E	-	SKED Inspection time · Every 1st TUE(1300-1700 UTC) of the month - VORTAC(NPH) · Every 3rd TUE(1300-1700 UTC) of the month - LOC - DME · Every 2nd THU(1500-2000 UTC) of the month - VORTAC(KPO)
VORTAC (9° W/2025)	KPO	112.5 MHz (CH 72X)	H24	355837.9N 1292828.3E	-	
LOC 10 (9° W/2025)	IKPO	110.9 MHz	H24	355917.1N 1292602.4E	-	
DME 10	IKPO	1007 MHz (CH 46X)	H24	355915.7N 1292604.2E	30 m	
PAR		9.3 GHz 9.42 GHz	H24	355920.2N 1292510.6E	-	SKED Inspection time · Every 2nd TUE(1000-1400 UTC) of the month
ASR		2710 MHz~ 2890 MHz	H24	355809.0N 1292606.2E	-	SKED Inspection time · Every WED(0900-2100 UTC) of the week

※ VORTAC(NPH) unusable area

VOR unusable	TACAN unusable
RDL 000 clockwise 010 beyond 23 NM below 7 000 ft AMSL	RDL 010 clockwise 030 beyond 5 NM below 10 000 ft AMSL
RDL 010 clockwise 030 beyond 5 NM below 10 000 ft AMSL	RDL 030 clockwise 040 beyond 15 NM below 3 500 ft AMSL
RDL 030 clockwise 040 beyond 15 NM below 3 500 ft AMSL	RDL 060 clockwise 110 beyond 20 NM below 5 000 ft AMSL
RDL 180 clockwise 210 beyond 15 NM below 8 000 ft AMSL	RDL 110 clockwise 160 beyond 17 NM below 6 000 ft AMSL
RDL 210 clockwise 240 beyond 18 NM below 8 000 ft AMSL	RDL 160 clockwise 240 beyond 10 NM below 8 000 ft AMSL
	RDL 240 clockwise 270 beyond 20 NM below 6 700 ft AMSL

※ LOC 10(IKPO) unusable area

RWY 10 LOC unusable beyond 25 NM below 3 500 ft from LOC ANT due to terrain.
--

RKTH AD 2.20 LOCAL AERODROME REGULATIONS

1. Aircraft operation is restricted when surface measurement is less than 0.25 due to shortage of clearway.
2. When obstacle RKTHOB019, RKTHOB020 and RKTHOB021(see AD 2.10; Aerodrome obstacles) are not lighted at night(from sunset to sunrise), VOR/DME RWY 28 Approach(both straight-in and circling) is NOT authorized.
3. Establishment of temporal restricted area

All aircrafts must avoid flying over POSCO as follows :

Period	Vertical limit	Lateral limit
Until Complete Construction of RWY	<u>6 000 ft AMSL</u> SFC	360219N1292404E - 360157N1292524E - 360136N1292500E - 360146N1292430E - 360117N1292401E - 360114N1292346E - 360043N1292327E - 360037N1292339E - 360049N1292359E - 360031N1292426E - 360039N1292434E - 360042N1292521E - 355947N1292406E - 355936N1292401E - 355932N1292347E - 360036N1292229E - 360141N1292306E TO THE BEGINNING

4. Arrival Procedure

4.1 After landing, runway vacating and taxi instruction will be given by ATC prior to pilot request.

- 4.2 Arrival routes

1. Unless otherwise instructed by ATC, aircraft shall vacate via the end of the RWY and hold at holding point.

RWY in use	Vacate and holding point
RWY 10	S1 Intersection taxiway
RWY 28	S5 Intersection taxiway

RKTH AD 2.21 NOISE ABATEMENT PROCEDURES

NIL

Change : Establishment of arrival procedure.

RKTH AD 2.22 FLIGHT PROCEDURES

1. RADAR Procedures

1.1 PAR Approach

a. RWY 10

1) Weather minima

CAT		GS/TCH/RPI	DH(MDA-VIS)	HAT/HAA	Ceiling
FULL	A,B,C,D	3° / 56 ft / 1 126.84 ft	463 ft / $\frac{3}{4}$	387 ft	400 ft
	E	NA	NA	NA	NA
ALS INOP	A,B,C,D	3° / 56 ft / 1 126.84 ft	463 ft / $1\frac{1}{4}$	387 ft	400 ft
	E	NA	NA	NA	NA

* Remarks : Missed approach requires minimum climb of 340 ft per NM to 5 000 ft.

2) Missed approach procedure

Climb to 5 000 ft via HDG 097° to NPH VORTAC 2 DME and climbing left turn HDG 030°, then directed by ATC.

Alternate Missed approach : Climb to 5 000 ft via HDG 097°, then directed by ATC.

b. RWY 28

1) Weather minima

CAT		GS/TCH/RPI	DH(MDA-VIS)	HAT/HAA	Ceiling
FULL	A, B	3.8° / 60 ft / 866.61 ft	1 306 ft / 3	1 237 ft	1 300 ft
	C, D, E	NA	NA	NA	NA
ALS INOP	A, B	3.8° / 60 ft / 866.61 ft	1 306 ft / 3	1 237 ft	1 300 ft
	C, D, E	NA	NA	NA	NA

* Remarks : PAPI and procedure TCH is not coincident.(VGSI angle 3.5° / TCH 86)

2) Missed approach procedure

AT DH, Climb to 5 000 ft via HDG 277°, then as directed by ATC.

1.2 ASR Approach

a. RWY 10

1) Weather minima

CAT	A	B	C	D
FULL	600 / 40 524 (600- $\frac{3}{4}$)	600 / 40 524 (600- $\frac{3}{4}$)	600 / 55 524 (600-1)	600 / 55 524 (600-1)
ALS INOP	600 / 55 524 (600-1)	600 / 55 524 (600-1)	600 / $1\frac{1}{2}$ 524 (600- $1\frac{1}{2}$)	600 / $1\frac{1}{2}$ 524 (600- $1\frac{1}{2}$)
CIRCLING	940 / $1\frac{1}{4}$ 864 (900- $1\frac{1}{4}$)	1 000 / $1\frac{1}{4}$ 924 (1 000- $1\frac{1}{4}$)	1 240 / 3 1 164 (1 200-3)	1 460 / 3 1 384 (1 400-3)

2) Missed approach procedure

Climb to 5 100 ft via HDG 097° to NPH VORTAC 2 DME and climbing left turn HDG 030°, then directed by ATC.
Alternate Missed approach : Climb to 5 100 ft via HDG 097°, then directed by ATC.

b. RWY 28

1) Weather minima

CAT	A	B	C	D
FULL	1 180 / 55 1 111 (1 200-1)	1 180 / 60 1 111 (1 200- $1\frac{1}{4}$)	1 180 / 3 1 111(1 200-3)	1 180 / 3 1 111(1 200-3)
ALS INOP	1 180 / 55 1 111 (1 200-1)	1 180 / 60 1 111 (1 200- $1\frac{1}{4}$)	1 180 / 3 1 111(1 200-3)	1 180 / 3 1 111(1 200-3)
CIRCLING	1 180 / $1\frac{1}{4}$ 1 104 (1 200- $1\frac{1}{4}$)	1 180 / $1\frac{1}{2}$ 1 104 (1 200- $1\frac{1}{2}$)	1 240 / 3 1 164(1 200-3)	1 460 / 3 1 384(1 400-3)

2) Missed approach procedure

Climb to 5 100 ft via HDG 277°, Then directed by ATC.

1.3 Radio communication failure procedure

If no transmissions are received for 1 minute in the pattern or 5 SEC(PAR) / 15 SEC(ASR) on final approach, attempt contact TWR(308.5 MHz or 118.05 MHz) and proceed VFR. If unable, proceed with LOC/DME RWY 10 approach, maintain 5 000 ft until establish on approach procedure.

1.4 Circle not AUTH. "N" of RWY 10-28

2. Take-off weather minima

ENG	RWY 10	RWY 28
1, 2	1 600 m	1 600 m
3, 4	800 m	800 m

3. Communication Failure

3.1 IFR

1. General

- No person may take off unless two-way communication can be maintained with the Air Traffic Control.
- On recognition of communication failure during flight, squawk 7600 and if necessary to ensure safe altitude, climb to Minimum Safe Altitude or above to maintain obstacle clearance. Then comply with following Procedures. Then comply with following procedure.

2. VFR condition

If the failure occurs in VFR conditions, or if VFR conditions are encountered after the failure, each pilot shall continue the flight under VFR and land as soon as practicable.

3. IFR condition

If the failure occurs in IFR conditions, or if paragraph 2 of this section cannot be complied with, each pilot shall continue the flight according to the following :

A. DEPARTURE

a. Under Pilot Navigation

- Runway 10 in use

ALL AIRCRAFT : DEPARTURE CLIMB RATE 490 ft/NM to 5 100 TURN MAX SPEED 250 kt IAS TAKE-OFF AT LEAST 35 ft AGL OVER DER.

TAKE-OFF RWY 10 : Climb HDG 097° to NPH 4 DME or cross LR-057 KPO, then via assigned transition routes.

The following transitions are ATC assigned only : Fly to intercept for en route.

ELAPI Transition :left turn HDG 280° to intercept R 314 KPO and R 314 KPO to ELAPI.

LOSTO Transition :left turn HDG 330° to intercept R 002 KPO and R 002 KPO to LOSTO.

BULGA Transition :right turn HDG 130° to intercept R 106 KPO and R 106 KPO to BULGA.

APARU Transition :right turn HDG 240° to intercept R 212 KPO and R 212 KPO to APARU.

LAPAL Transition :right turn HDG 300° to intercept R 265 KPO and R 265 KPO to LAPAL.

- Runway 28 in use

ALL AIRCRAFT : DEPARTURE CLIMB RATE 470 ft/NM TO 5 100 TURN MAX SPEED 250 kt IAS TAKE-OFF AT LEAST 35 ft AGL OVER DER.

TAKE-OFF RWY 28 : Climb HDG 277° to NPH 4 DME or cross LR-282 KPO, then via assigned transition routes.

The following transitions are ATC assigned only : Fly to intercept for en route.

ELAPI Transition :right turn HDG 340° to intercept R 314 KPO and R 314 KPO to ELAPI.

LOSTO Transition :right turn HDG 050° to intercept R 002 KPO and R 002 KPO to LOSTO.

BULGA Transition :left turn HDG 080° to intercept R 106 KPO and R 106 KPO to BULGA.

APARU Transition :left turn HDG 170° to intercept R 212 KPO and R 212 KPO to APARU.

LAPAL Transition :left turn HDG 240° to intercept R 265 KPO and R 265 KPO to LAPAL.

B. ARRIVAL

- Runway 10 in use

If the failure occurs proceed with LOC/DME procedure, maintain 5 000 ft until establish on approach procedure.

- Runway 28 in use

If the failure occurs proceed with VOR/DME procedure, maintain 6 000 ft until establish on approach procedure.

3.2 VFR

1. VFR flight which has encountered radio communication failure shall

a. Helicopter

1) Squawk 7600, and

2) When able to see light gun signal from control tower, follow that instruction.

3) If unable to see light gun signal from control tower, hold over "N" until ETA or for 10 minutes, whichever is later, then

4) Land parallel taxi way as appropriate

b. Conventional flight


1) Squawk 7600, and

2) When able to see light gun signal from control tower, follow that instruction.

3) If unable to see light gun signal from control tower, hold over "N" until ETA or for 10 minutes, whichever is later, then

4) Make landing on runway 10/28 in use as appropriate.

Arrival and Departure Procedures for VFR Traffic

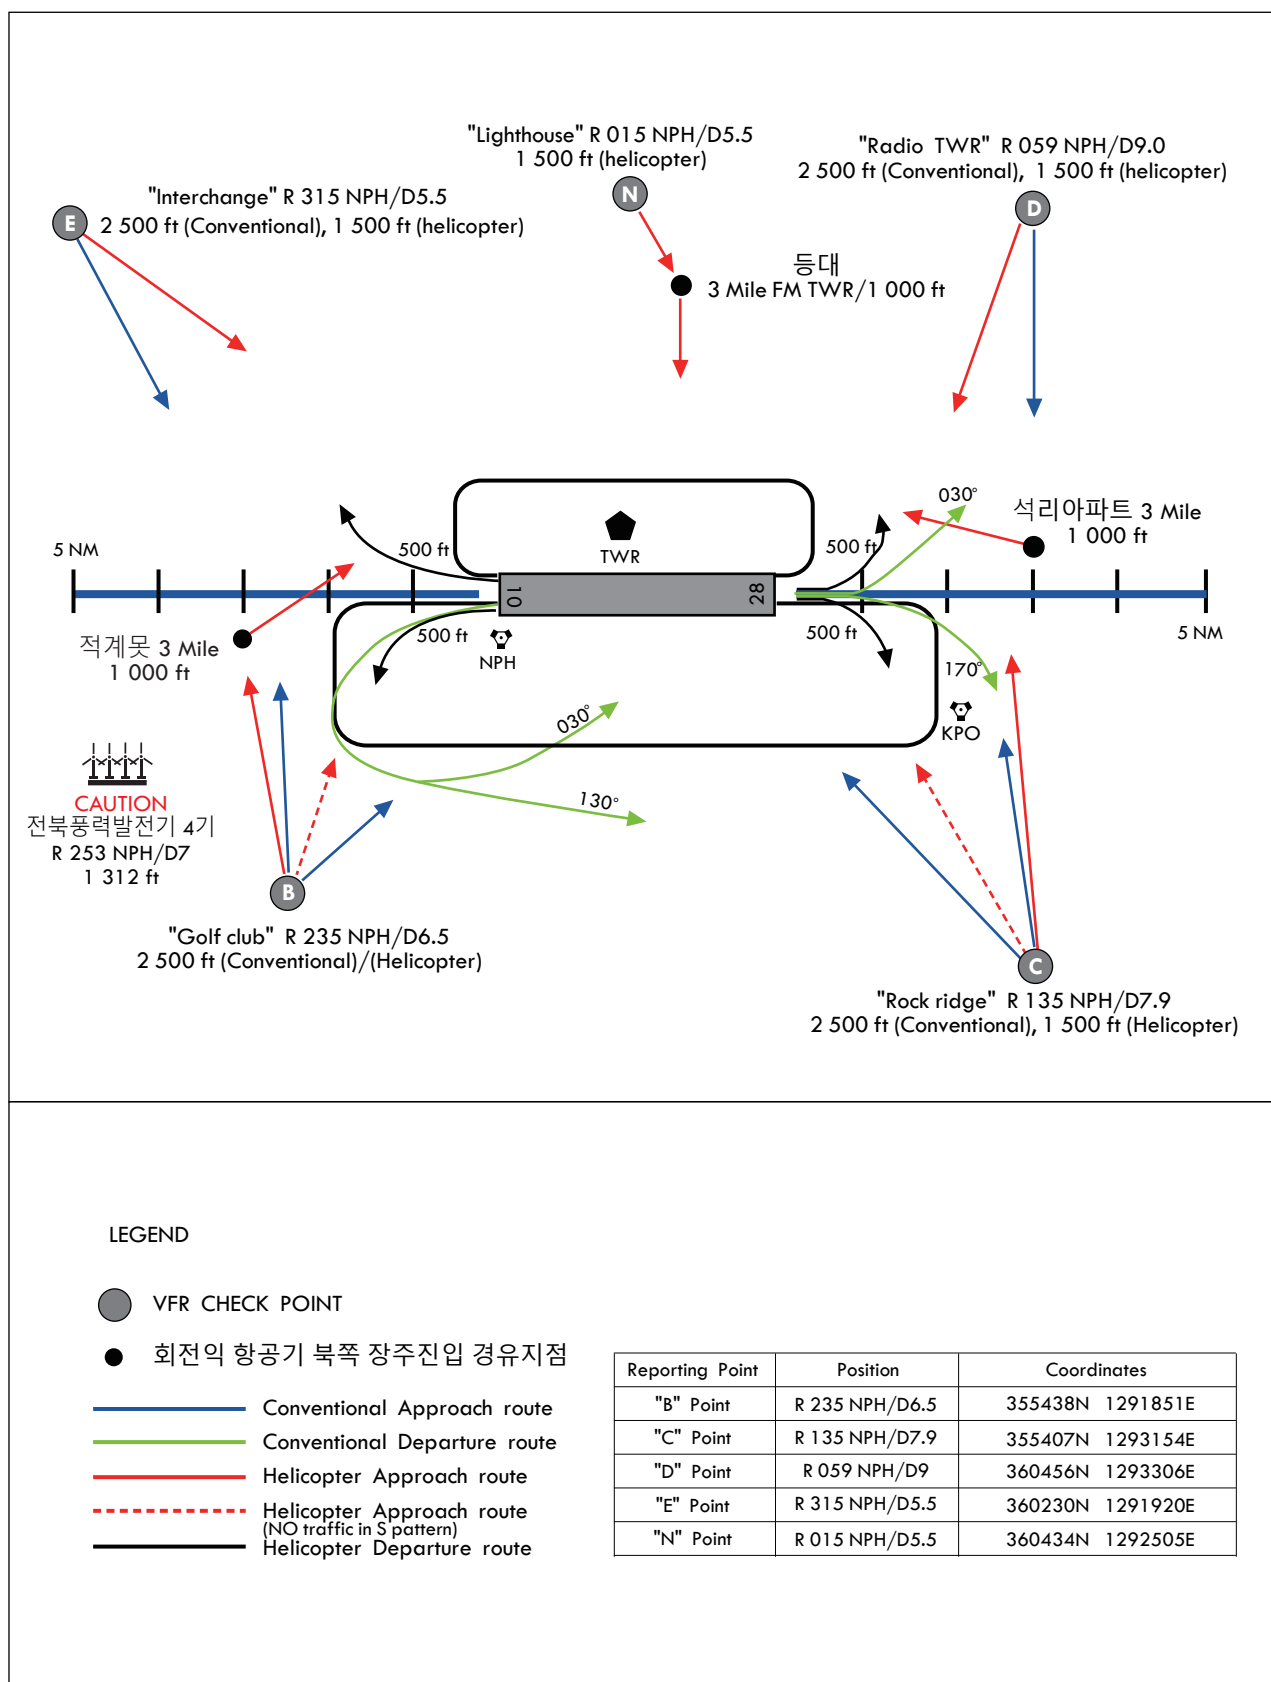

RKTH AD 2.23 ADDITIONAL INFORMATION

1. Bird concentrations in the vicinity of airport

a. General Bird Information			b. Seasonal Characteristics	c. Other Specifics
Species		Habitat/ Bird Flight Path		
Laridae	Vega gull	See AD Chart 2-18	Arrival period : OCT-MAR * Approx. 1 800 individuals observed	Weight : Approx. 1 085 g Flying in flocks Mostly flying at 0-500 ft, Occasionally between 500 and 3 500 ft
	Common gull		Arrival period : OCT-MAR * Approx. 2 500 individuals observed	Weight : Approx. 580 g Flying in flocks Mostly flying at 0-500 ft, Occasionally between 500 and 3 500 ft
Anatidae	Mallard		Arrival period : OCT-MAR * Approx. 1 500 individuals observed	Weight : Approx. 1 082 g Flying in flocks Mostly flying at 0-3 500 ft, Occasionally above 3 500 ft
	Eastern spot-billed duck		Arrival period : Year-round * Approx. 760 individuals observed	Weight : Approx. 1 011 g Flying in flocks Mostly flying at 0-3 500 ft, Occasionally above 3 500 ft
	Tundra bean goose		Arrival period : OCT-MAR * Approx. 800 individuals observed	Weight : Approx. 2 850 g Flying in flocks Mostly flying at 0-3 500 ft, Occasionally above 3 500 ft
	Greater White-fronted goose		Arrival period : OCT-MAR * Approx. 300 individuals observed	Weight : Approx. 2 620 g Flying in flocks Mostly flying at 0-3 500 ft, Occasionally above 3 500 ft
Phalacrocoracidae	Great cormorant		Arrival period : Year-round * Approx. 1 200 individuals observed	Weight : Approx. 2 110 g Flying in flocks Mostly flying at 0-3 500 ft
Ardeidae	Grey heron		Arrival period : Year-round * Approx. 430 individuals observed	Weight : Approx. 1 443 g Flying in flocks Mostly flying at 0-500 ft

Change : Information of bird concentrations in the vicinity of airport.

RKTH AD 2.24 CHART RELATED TO THE AERODROME

Aerodrome Chart - ICAO	RKTH AD CHART 2-1
Area Chart - ICAO	RKTH AD CHART 2-2
SID - RWY 10 - POHANG 3	RKTH AD CHART 2-3
SID - RWY 10 - POHANG 5	RKTH AD CHART 2-4
SID - RWY 10 - RNAV(GNSS) DORTI 1	RKTH AD CHART 2-5
SID - RWY 28 - POHANG 4	RKTH AD CHART 2-6
SID - RWY 28 - RNAV(GNSS) MARM 1	RKTH AD CHART 2-7
STAR - RWY 10 - RNAV(GNSS) EMTIK 1	RKTH AD CHART 2-8
STAR - RWY 28 - RNAV(GNSS) PUDEN 1	RKTH AD CHART 2-9
ATC Surveillance Minimum Altitude Chart - ICAO	RKTH AD CHART 2-10
Instrument Approach Chart - RWY 10 - LOC/DME	RKTH AD CHART 2-11
Instrument Approach Chart - RWY 10 - VOR/DME or TACAN	RKTH AD CHART 2-12
Instrument Approach Chart - RWY 10 - RNP Y	RKTH AD CHART 2-13
Instrument Approach Chart - RWY 10 - RNP Z(AR)	RKTH AD CHART 2-14
Instrument Approach Chart - RWY 28 - VOR/DME or TACAN	RKTH AD CHART 2-15
Instrument Approach Chart - RWY 28 - RNP Y	RKTH AD CHART 2-16
Instrument Approach Chart - RWY 28 - RNP Z(AR)	RKTH AD CHART 2-17
Bird concentrations in the vicinity of aerodrome	RKTH AD CHART 2-18

INTENTIONALLY

LEFT

BLANK