
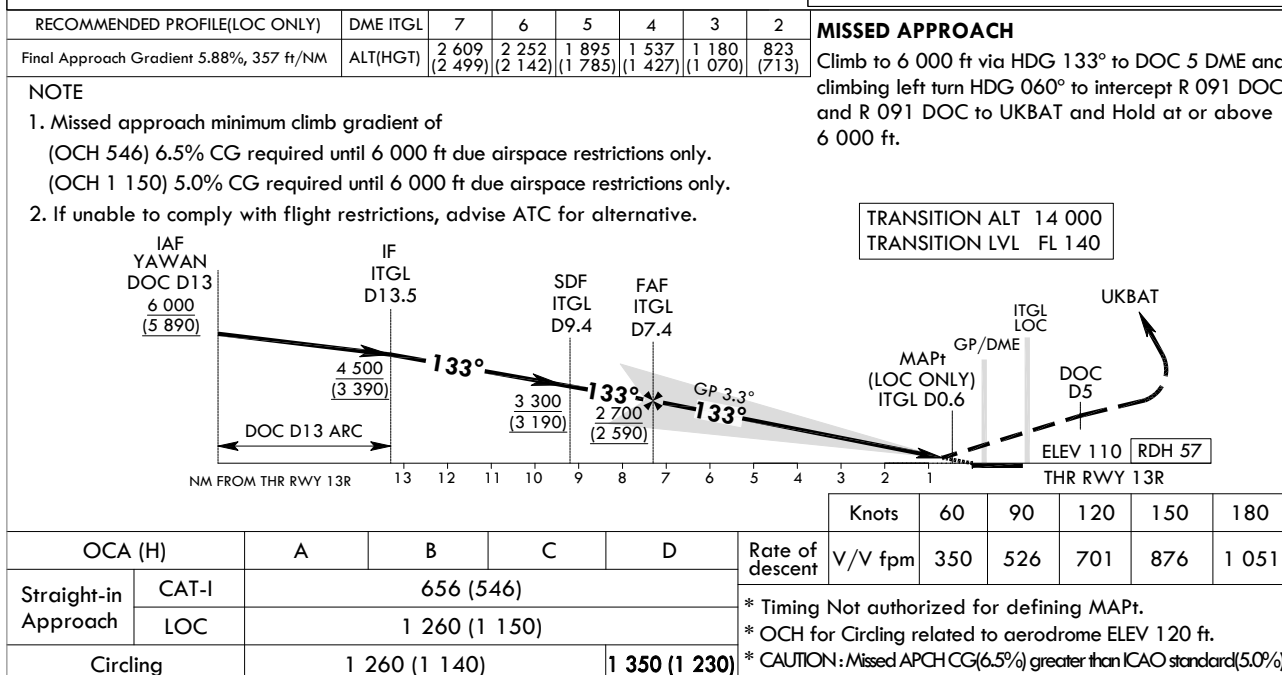


INSTRUMENT
APPROACH
CHART - ICAOAERODROME ELEV 120 ft
HEIGHTS RELATED TO
THR RWY 13R - ELEV 110 ftDAEGU APP 135.9
DAEGU TWR 126.2DAEGU/Daegu Intl(RKTN)
ILS Y or LOC Y RWY 13R

Note : Approach under ICAO Flight Procedures.

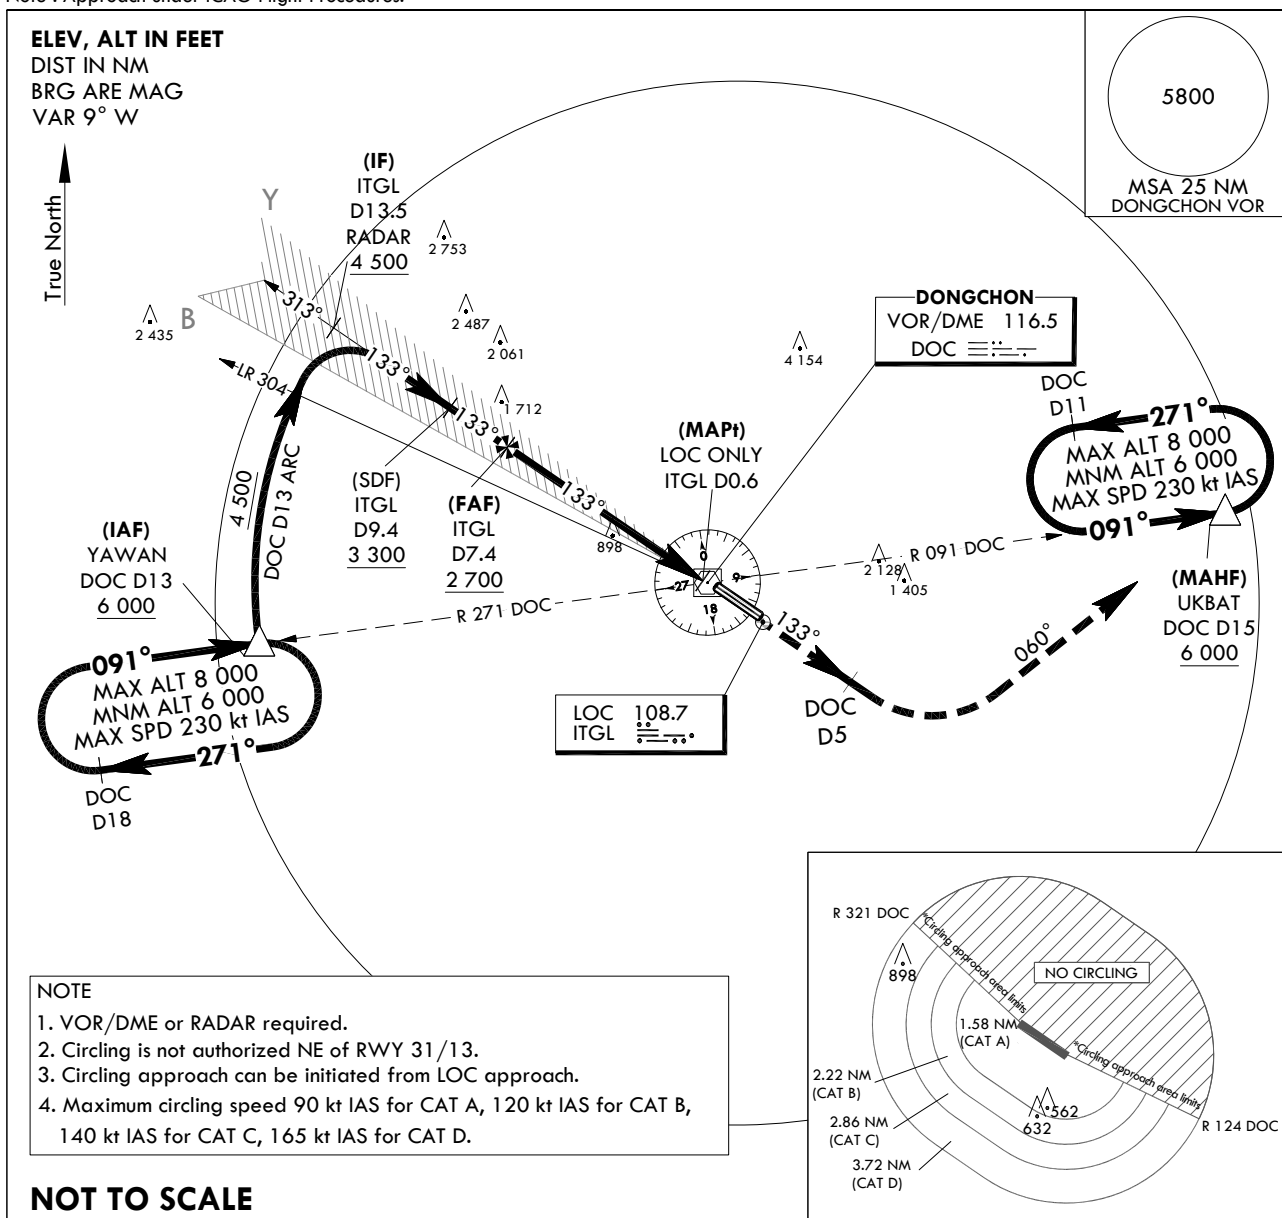

Change : Information of instrument approach procedure for RWY 13R.

OFFICE OF CIVIL AVIATION

AIRAC AIP AMDT 8/26
Effective : 1600UTC 2 SEP 2026

DAEGU/Daegu Intl(RKTN)
ILS Y or LOC Y RWY 13R

AERONAUTICAL DATA TABULATION

ILS/LOC Approach to RWY 13R from YAWAN(IAF)			
Fix / Point		Coordinates	
YAWAN(IAF)	R 271/13.00 NM DOC	35°22'24.8"N	128°22'38.0"E
D13.5 ITGL(IF)	BRG 132.71°/13.50 NM ITGL	36°01'30.6"N	128°25'12.1"E
D9.4 ITGL(SDF)	BRG 132.75°/9.40 NM ITGL	35°59'13.9"N	128°29'20.5"E
D7.4 ITGL(FAF)	BRG 132.77°/7.40 NM ITGL	35°58'06.5"N	128°31'22.8"E
D0.6 ITGL (MAPt LOC ONLY)	BRG 132.84°/0.60 NM ITGL	35°54'17.1"N	128°38'18.2"E
THR RWY 13R		35°54'02.19"N	128°38'45.07"E
DME ITGL		35°53'54.1"N	128°38'53.0"E
VOR/DME DOC		35°54'13.6"N	128°38'29.0"E
D5 DOC	HDG 133	35°51'22.8"N	128°43'32.7"E
UKBAT	R 091/15.00 NM DOC	35°56'16.5"N	128°56'47.1"E

Change : Information of instrument approach procedure for RWY 13R.

INSTRUMENT
APPROACH
CHART - ICAOAERODROME ELEV 120 ft
HEIGHTS RELATED TO
THR RWY 31L - ELEV 118 ftDAEGU APP 135.9
DAEGU TWR 126.2DAEGU/Daegu Intl(RKTN)
ILS Y or LOC Y RWY 31L


Note : Approach under ICAO Flight Procedures.

ELEV, ALT IN FEET
DIST IN NM
BRG ARE MAG
VAR 9° W

NOTE

1. VOR/DME or RADAR required.
2. Circling is not authorized NE of RWY 31/13.
3. Circling approach can be initiated from LOC approach.
4. Maximum circling speed 90 kt IAS for CAT A, 120 kt IAS for CAT B, 140 kt IAS for CAT C, 165 kt IAS for CAT D.

5800

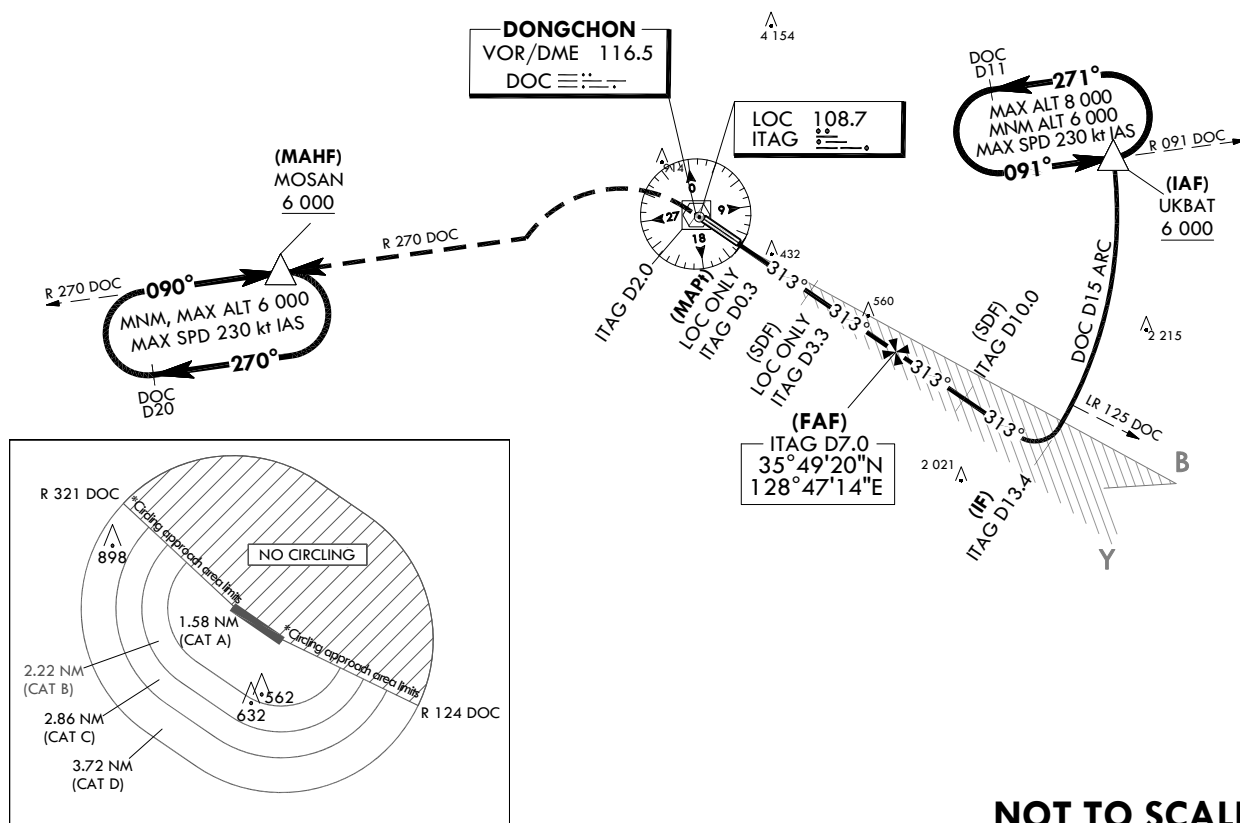MSA 25NM
DONGCHON VOR


NOT TO SCALE

RECOMMENDED PROFILE(LOC ONLY)	DME ITAG	7	6	5	4	3	2	TRANSITION ALT 14 000
Final Approach Gradient 5.29%(321 ft/NM) to SDF, 5.41%(329 ft/NM) to THR.	ALT(HGT)	2 508 (2 390)	2 187 (2 069)	1 866 (1 748)	1 544 (1 426)	1 101 (983)	773 (655)	TRANSITION LVL FL 140

MISSED APPROACH

Climb straight ahead until ITAG D2.0 then left turn to intercept R 270 DOC to MOSAN and Hold at or above 6 000 ft.

1. 5.7% CG required until 6 000 ft due airspace restrictions only.
2. If unable to comply with flight restrictions, advise ATC for alternative.

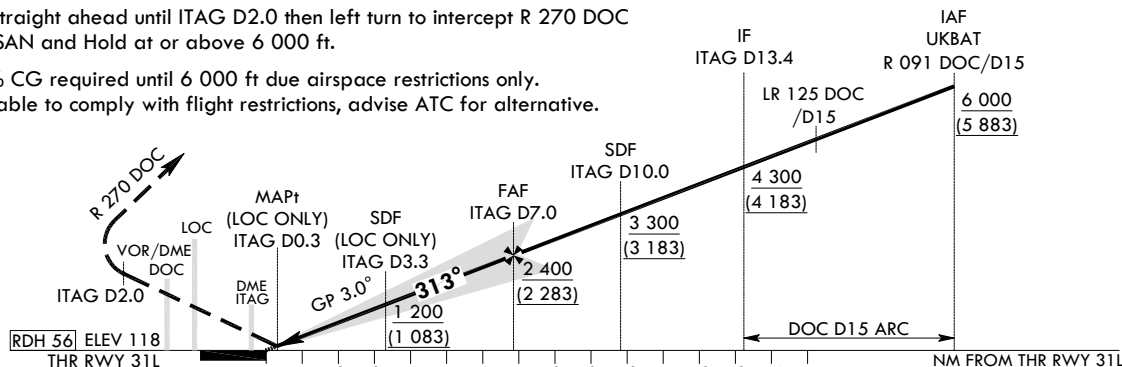

					Knots	60	90	120	150	180	
OCA (H)		A	B	C	D	Rate of descent V/V fpm	318	478	637	796	955
Straight-in Approach	CAT-I	318 (200)				* Timing Not authorized for defining MAPt. * OCH for LOC and Circling related to aerodrome ELEV 120 ft * CAUTION : Missed APCH CG(5.7%) greater than ICAO standard(5.0%)					
	LOC	740 (620)									
Circling		910 (790)	980 (860)	1 080 (960)	1 350 (1 230)						

* Timing Not authorized for defining MAPt.
* OCH for LOC and Circling related to aerodrome ELEV 120 ft.
* CAUTION : Missed APCH CG(5.7%) greater than ICAO standard(5.0%).

Change : Information of instrument approach procedure for RWY 31L.

OFFICE OF CIVIL AVIATION

AIRAC AIP AMDT 8/26
Effective : 1600UTC 2 SEP 2026

DAEGU/Daegu Intl(RKTN)
ILS Y or LOC Y RWY 31L


AERONAUTICAL DATA TABULATION

ILS/LOC Approach to RWY 31L from UKBAT(IAF)			
Fix / Point		Coordinates	
UKBAT(IAF)	15 DME ARC/15.00 NM DOC	35°56'16.5"N	128°56'47.1"E
D13.4 ITAG(IF)	BRG 312.99°/13.40 NM ITAG	35°45'43.9"N	128°53'42.4"E
D10.0 ITAG(SDF)	BRG 312.96°/10.00 NM ITAG	35°47'39.5"N	128°50'14.8"E
D7.0 ITAG(FAF)	BRG 312.93°/7.00 NM ITAG	35°49'19.7"N	128°47'14.5"E
D3.3 ITAG(SDF LOC only)	BRG 312.93°/3.30 NM ITAG	35°51'26.4"N	128°43'26.4"E
D0.3 ITAG(MAPt LOC only)	BRG 312.89°/0.30 NM ITAG	35°53'07.9"N	128°40'23.1"E
THR RWY 31L		35°53'11.91"N	128°40'15.91"E
DME ITAG		35°53'15.5"N	128°40'03.0"E
DOC VOR/DME		35°54'13.6"N	128°38'29.0"E
D2.0 ITAG	HDG 313/2.00 NM ITAG	35°54'25.5"N	128°38'02.9"E
MOSAN	R 270/15.00 NM DOC	35°51'58.4"N	128°20'14.0"E

Change : Information of instrument approach procedure for RWY 31L.

INSTRUMENT
APPROACH
CHART - ICAOAERODROME ELEV 120 ft
HEIGHTS RELATED TO
THR RWY 31R - ELEV 120 ftDAEGU APP 135.9
DAEGU TWR 126.2DAEGU/Daegu Intl(RKTN)
LOC Y RWY 31R

Note : Approach under ICAO Flight Procedures.

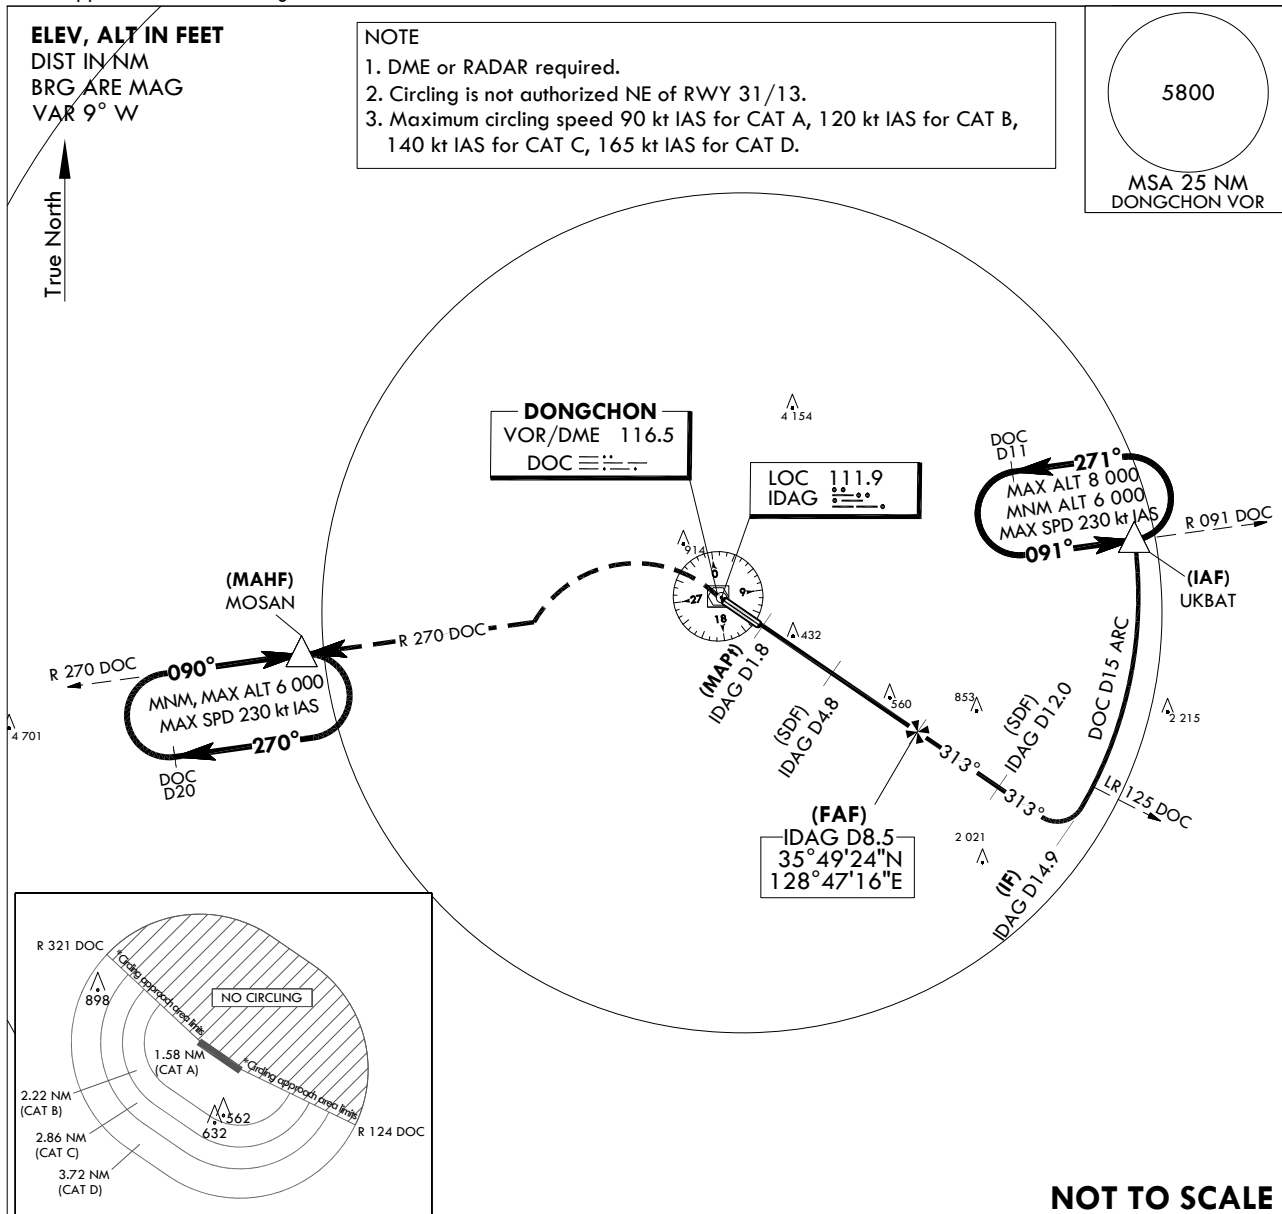


RECOMMENDED PROFILE(LOC ONLY)	DME IDAG	8	7	6	5	4	3	TRANSITION ALT 14 000 TRANSITION LVL FL 140
Final Approach Gradient 5.35%(325 ft/NM) to SDF, 5.34%(324 ft/NM) to THR.	ALT(HGT)	2 361 (2 241)	2 036 (1 916)	1 711 (1 591)	1 385 (1 265)	941 (821)	616 (496)	

MISSED APPROACH

Climb to 6 000 ft via direct to DOC and climbing left turn to intercept R 270 DOC and R 270 DOC to MOSAN and Hold at or above 6 000 ft.

- 5.7% CG required until 6 000 ft due airspace restrictions only.
- If unable to comply with flight restrictions, advise ATC for alternative.

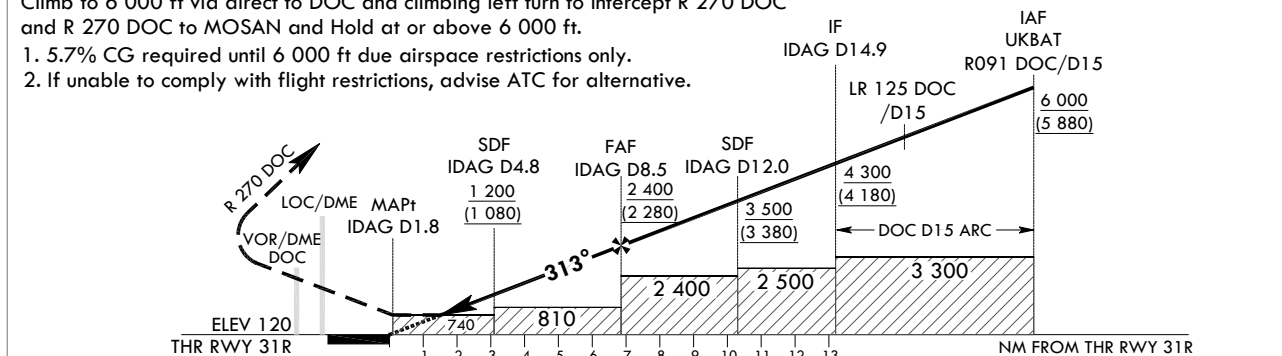

						Knots	60	90	120	150	180
OCA (H)		A	B	C	D	Rate of descent V/V fpm	325	487	650	812	974
Straight-in Approach	LOC	740 (620)					* Timing Not authorized for defining MAPt. * OCH for LOC and Circling related to aerodrome ELEV 120 ft. * CAUTION : Missed APCH CG(5.7%) greater than ICAO standard(5.0%)				
		Circling					910 (790)	980 (860)	1 080 (960)	1 350 (1 230)	

Change : Information of instrument approach procedure for RWY 31R.

DAEGU/Daegu Intl(RKTN)
LOC Y RWY 31R

AERONAUTICAL DATA TABULATION

LOC Y Approach to RWY 31R from UKBAT(IAF)			
Fix / Point		Coordinates	
UKBAT(IAF)	15 DME ARC/15.00 NM DOC	35°56'16.5"N	128°56'47.1"E
D14.9 IDAG(IF)	BRG 312.99°/14.90 NM IDAG	35°45'47.6"N	128°53'44.9"E
D12.0 IDAG(SDF)	BRG 312.96°/12.00 NM IDAG	35°47'25.6"N	128°50'48.9"E
D8.5 IDAG(FAF)	BRG 312.92°/8.50 NM IDAG	35°49'24.2"N	128°47'15.7"E
D4.8 IDAG(SDF)	BRG 312.89°/4.80 NM IDAG	35°51'29.4"N	128°43'30.0"E
D1.8 IDAG(MAPt)	BRG 311.82°/1.80 NM IDAG	35°53'10.8"N	128°40'26.9"E
THR RWY 31R		35°52'04.52"N	128°20'12.38"E
DME IDAG		35°54'13.7"N	128°38'38.8"E
DOC VOR/DME		35°54'13.6"N	128°38'29.0"E
MOSAN	R 270/15.00 NM DOC	35°51'58.4"N	128°20'14.0"E

Change : Information of instrument approach procedure for RWY 31R.


INSTRUMENT APPROACH CHART - ICAO

AERODROME ELEV 120 ft
HEIGHTS RELATED TO
THR RWY 31R - ELEV **120 ft**

DAEGU APP 135.9
DAEGU TWR 126.2

DAEGU/Daegu Intl(RKTN)
RNP Y RWY 31R

Note : Approach under ICAO Flight Procedures.

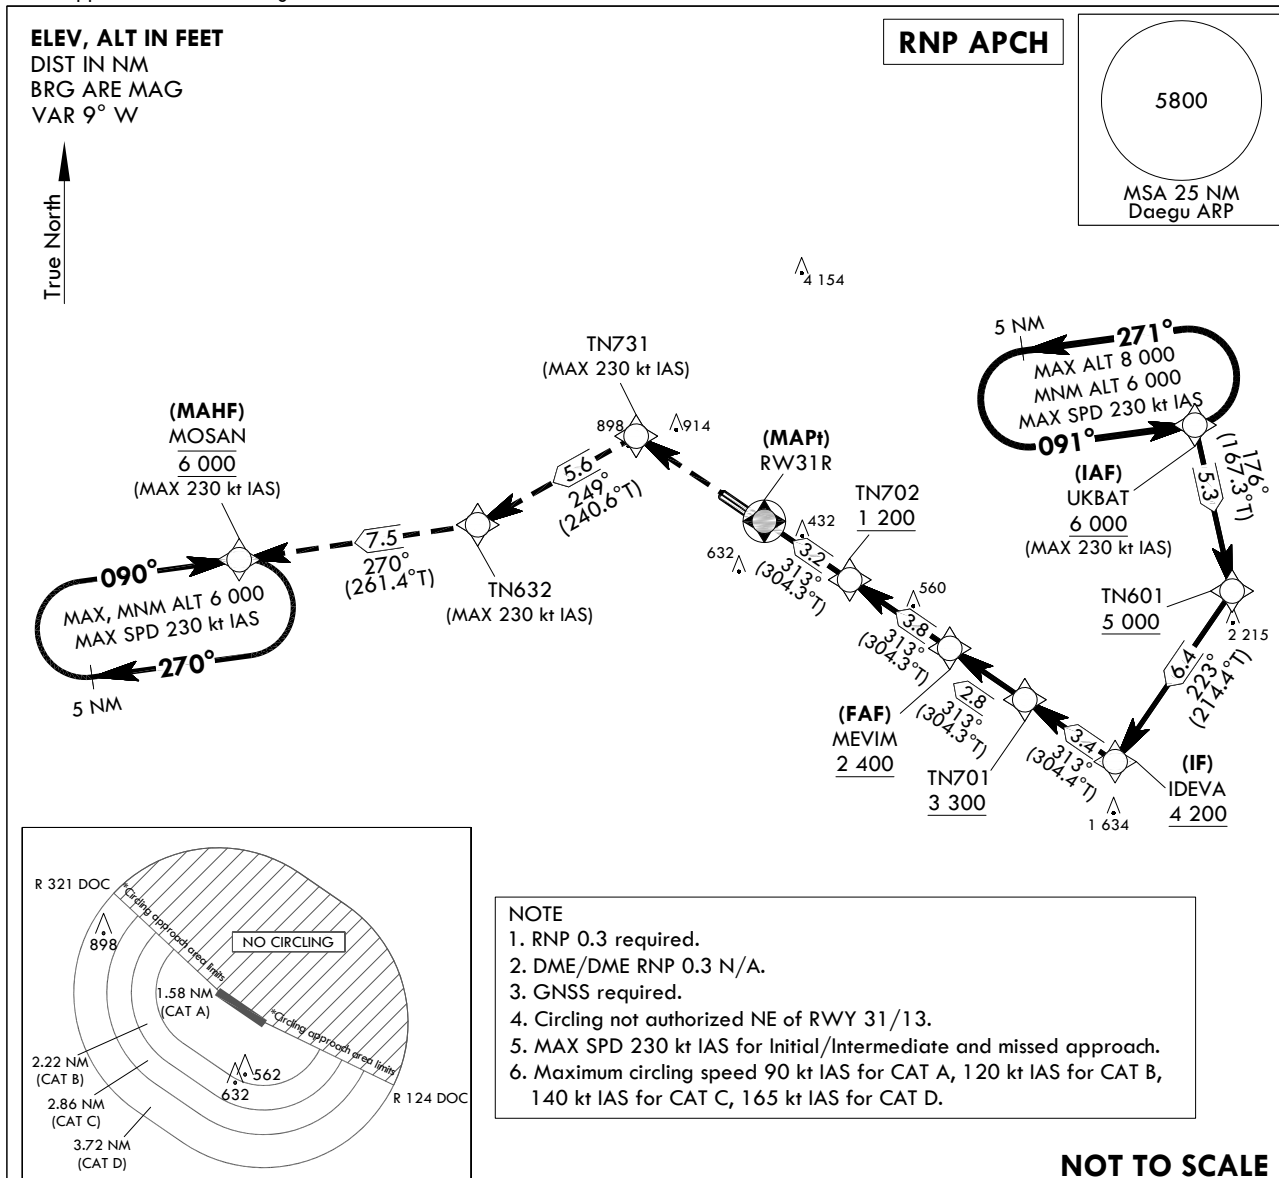


MISSED APPROACH

Climb to 6 000 ft on direct to TN731 and track 249° to TN632 and track 270° to cross MOSAN at 6 000 ft and hold.

1. 5.3% CG required until 6 000 ft due airspace restrictions only.
2. If unable to comply with flight restrictions, advise ATC for alternative.

TRANSITION ALT	14 000
TRANSITION LVL	FL 140

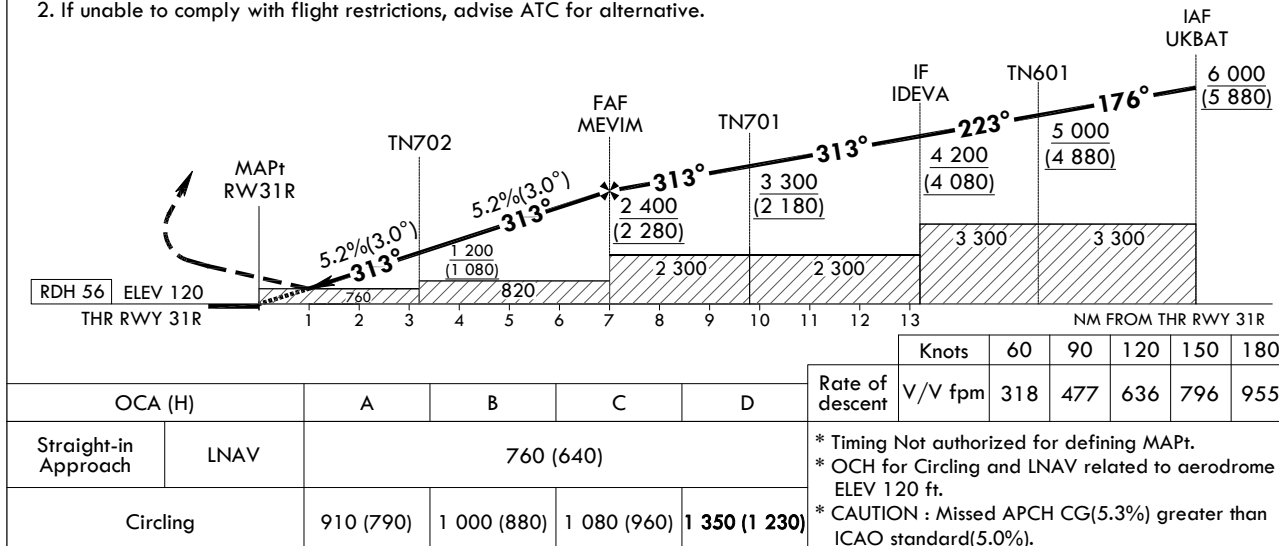

Change : Information of instrument approach procedure for RWY 31R.

DAEGU/Daegu Intl(RKTN)
RNP Y RWY 31R

AERONAUTICAL DATA TABULATION

Instrument Approach Procedure Coding Tables

RNP Y RWY 31R

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track M(T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/RDH	Navigation specification	Remarks
001	IF	UKBAT	-	-	-	-	+6 000	-230	35°56'16.5"N 128°56'47.1"E	-	RNP APCH	IAF
002	TF	TN601	-	176(167.3)	5.3	-	+5 000	-230	35°51'06.5"N 128°58'12.6"E	-	RNP APCH	-
003	TF	IDEVA	-	223(214.4)	6.4	-	+4 200	-230	35°45'47.6"N 128°53'44.7"E	-	RNP APCH	IF
004	TF	TN701	-	313(304.4)	3.4	-	+3 300	-230	35°47'42.9"N 128°50'17.7"E	-	RNP APCH	-
005	TF	MEVIM	-	313(304.3)	2.8	-	+2 400	-230	35°49'18.8"N 128°47'25.2"E	-	RNP APCH	FAF
006	TF	TN702	-	313(304.3)	3.8	-	+1 200	-	35°51'26.4"N 128°43'35.4"E	-3.00/56	RNP APCH	SDF
007	TF	RW31R	Y	313(304.3)	3.2	-	-	-	35°53'15.29"N 128°40'18.89"E	-	RNP APCH	MAPt
008	DF	TN731	-	-	-	-	-	-230	35°55'53.2"N 128°35'24.2"E	-	RNP APCH	-
009	TF	TN632	-	249(240.6)	5.6	-	-	-230	35°53'06.4"N 128°29'21.3"E	-	RNP APCH	-
010	TF	MOSAN	-	270(261.4)	7.5	-	@6 000	-230	35°51'58.4"N 128°20'14.0"E	-	RNP APCH	-
011	HM	MOSAN	Y	090(081.8)	-	R	@6 000	-230	35°51'58.4"N 128°20'14.0"E	-	RNP APCH	5 NM (Outbound Leg)

HOLDING PROCEDURE

Holding Identification	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track M(T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/RDH	Navigation specification	Remarks
RNP Y RWY 31R	HM	UKBAT	Y	091(082.2)	5.0	L	-8 000 +6 000	-230	35°56'16.5"N 128°56'47.1"E	-	RNP 1	-

Change : Information of instrument approach procedure for RWY 31R.