

**DAEGU/Daegu Intl(RKTN)
STANDARD ARRIVAL CHART
INSTRUMENT (STAR) - ICAO**

TRANSITION ALT 14 000
TRANSITION LVL FL 140

Daegu APP	135.9	346.3
Daegu TWR	126.2	236.6
	365.0	


DAEGU/Daegu Intl(RKTN)

RWY 13L/R

RNAV BITUX 1Y RNAV OPEDA 1Y
RNAV IGDKOK 1Y RNAV MASTA 1Y
RNAV KALOD 1Y RNAV LAPAL 1Y

Note : Arrival under ICAO Flight Procedures.

36°0'N

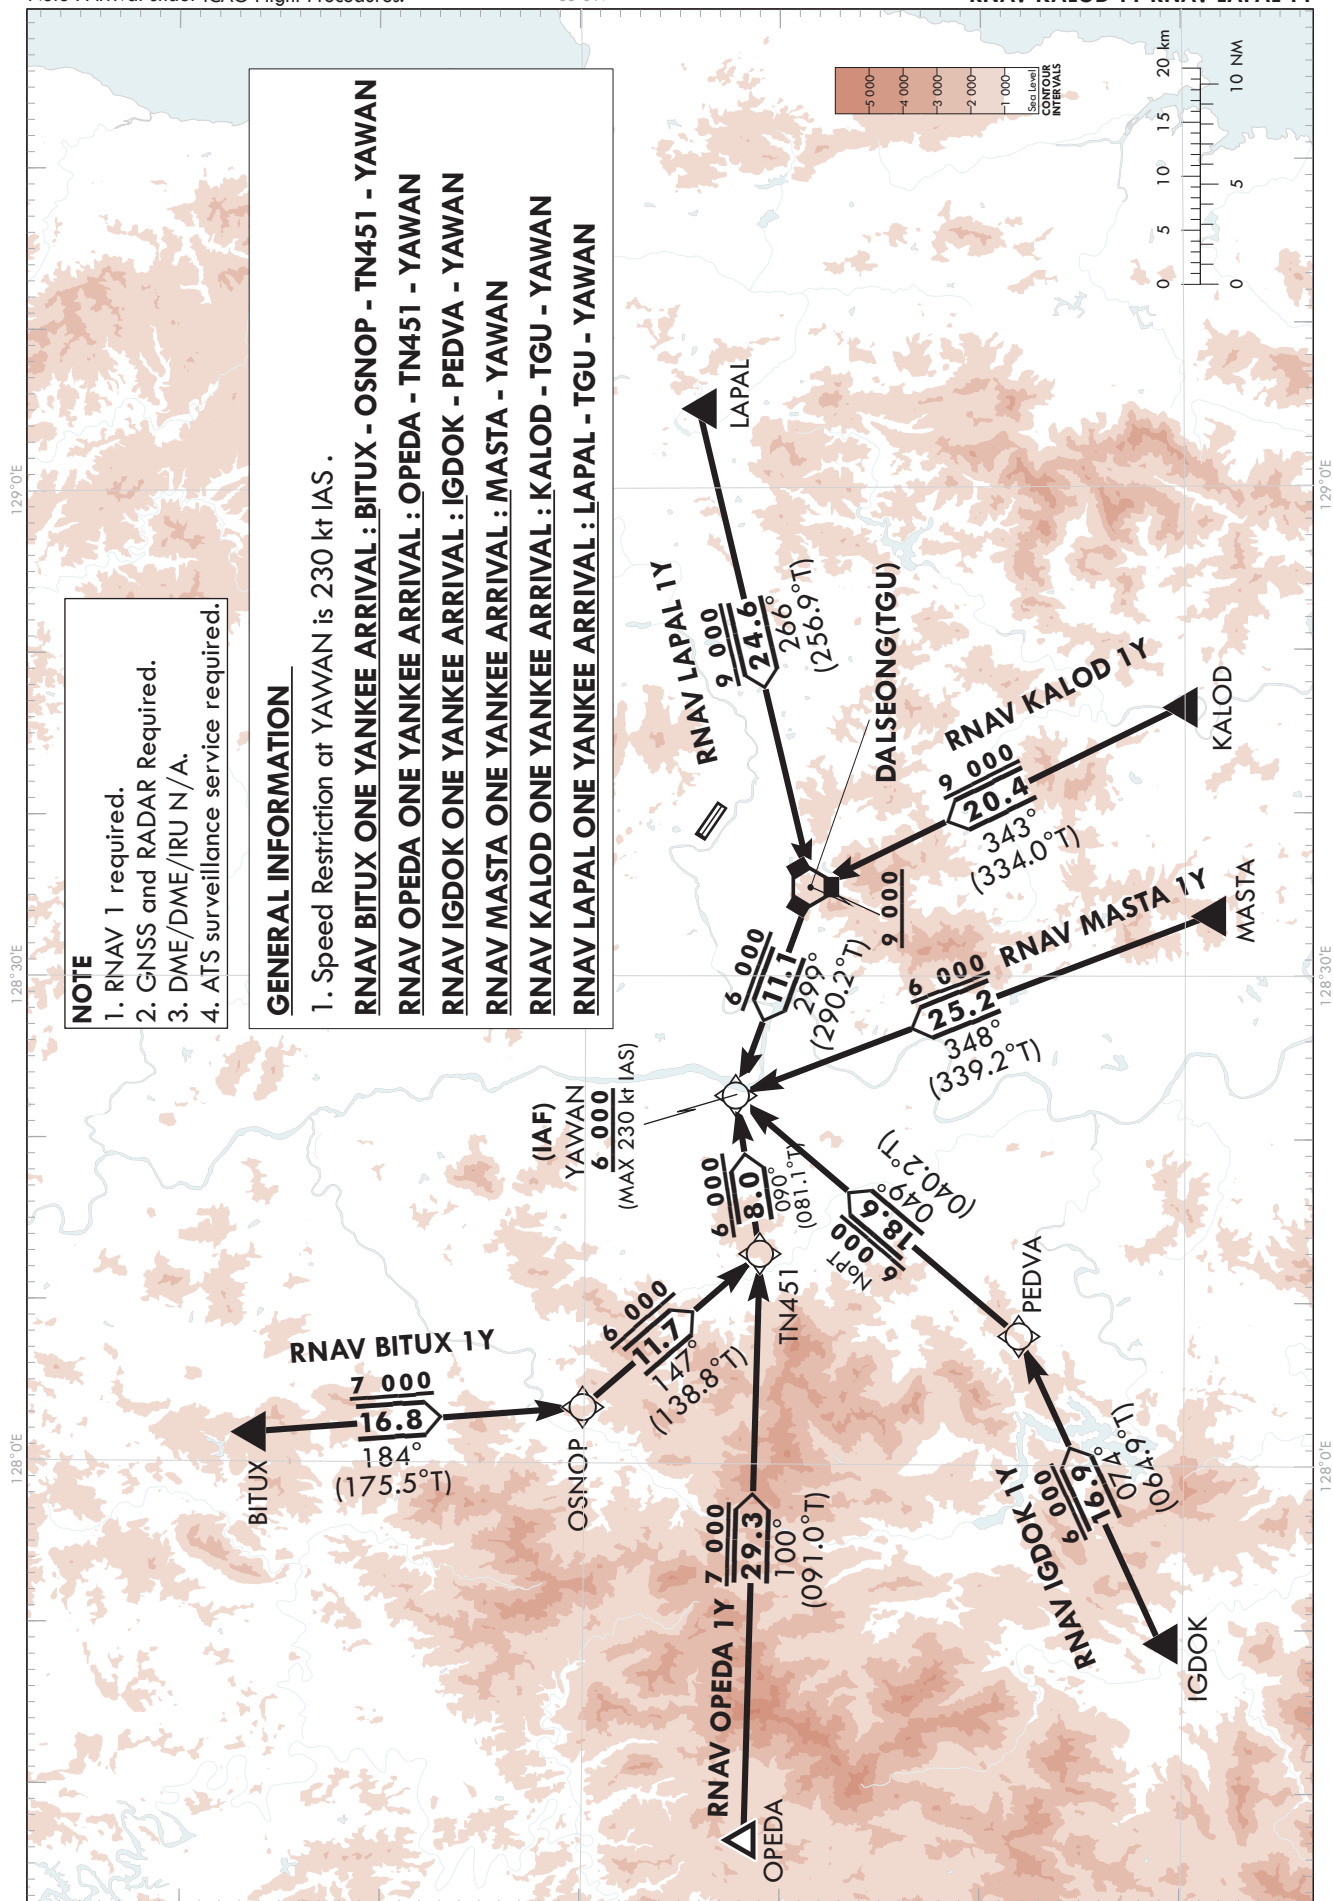

Change : Information of standard instrument arrival procedure for RWY 13L/R.

35°30'N

DAEGU/Daegu INTL(RKTN)
RWY 13L/R
RNAV BITUX 1Y RNAV OPEDA 1Y
RNAV IGDOK 1Y RNAV MASTA 1Y
RNAV KALOD 1Y RNAV LAPAL 1Y

AERONAUTICAL DATA TABULATION

Standard Instrument Arrival Procedure Coding Tables

RNAV BITUX 1Y

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track $M(^{\circ})/T(^{\circ})$	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/RDH	Navigation specification	Remarks
001	IF	BITUX	-	-	-	-	-	-	36°16'44.9"N 128°01'47.9"E	-	RNAV 1	-
002	TF	OSNOP	-	184(175.5)	16.8	-	+7 000	-	36°00'00.7"N 128°03'25.6"E	-	RNAV 1	-
003	TF	TN451	-	147(138.8)	11.7	-	+6 000	-	35°51'11.1"N 128°12'54.5"E	-	RNAV 1	-
004	TF	YAWAN	-	090(081.1)	8.0	-	+6 000	-230	35°52'24.8"N 128°22'38.0"E	-	RNAV 1	IAF

RNAV OPEDA 1Y

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track $M(^{\circ})/T(^{\circ})$	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/RDH	Navigation specification	Remarks
001	IF	OPEDA	-	-	-	-	-	-	35°51'48.5"N 127°36'52.0"E	-	RNAV 1	-
002	TF	TN451	-	100(091.0)	29.3	-	+7 000	-	35°51'11.1"N 128°12'54.5"E	-	RNAV 1	-
003	TF	YAWAN	-	090(081.1)	8.0	-	+6 000	-230	35°52'24.8"N 128°22'38.0"E	-	RNAV 1	IAF

RNAV IGDOK 1Y

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track $M(^{\circ})/T(^{\circ})$	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/RDH	Navigation specification	Remarks
001	IF	IGDOK	-	-	-	-	-	-	35°31'03.6"N 127°49'06.6"E	-	RNAV 1	-
002	TF	PEDVA	-	074(064.9)	16.9	-	+6 000	-	35°38'13.0"N 128°07'54.2"E	-	RNAV 1	-
003	TF	YAWAN	-	049(040.2)	18.6	-	+6 000	-230	35°52'24.8"N 128°22'38.0"E	-	RNAV 1	IAF

Change : Information of standard instrument departure procedure for RWY 13L/R.

DAEGU/Daegu INTL(RKTN)
RWY 13L/R
RNAV BITUX 1Y RNAV OPEDA 1Y
RNAV IGDOK 1Y RNAV MASTA 1Y
RNAV KALOD 1Y RNAV LAPAL 1Y

AERONAUTICAL DATA TABULATION

Standard Instrument Arrival Procedure Coding Tables

RNAV MASTA 1Y

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track M(T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	MASTA	-	-	-	-	-	-	36°28'47.0"N 128°33'39.6"E	-	RNAV 1	-
002	TF	YAWAN	-	348(339.2)	25.2	-	+6 000	-230	35°52'24.8"N 128°22'38.0"E	-	RNAV 1	IAF

RNAV KALOD 1Y

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track M(T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	KALOD	-	-	-	-	-	-	35°30'12.1"N 128°46'26.5"E	-	RNAV 1	-
002	TF	TGU	-	343(334.0)	20.4	-	+9 000	-	35°48'35.4"N 128°35'26.8"E	-	RNAV 1	-
003	TF	YAWAN	-	299(290.2)	11.1	-	+6 000	-230	35°52'24.8"N 128°22'38.0"E	-	RNAV 1	IAF

RNAV LAPAL 1Y

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track M(T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	LAPAL	-	-	-	-	-	-	35°54'12.6"N 129°04'52.0"E	-	RNAV 1	-
002	TF	TGU	-	266(256.9)	24.6	-	+9 000	-	35°48'35.4"N 128°35'26.8"E	-	RNAV 1	-
003	TF	YAWAN	-	299(290.2)	11.1	-	+6 000	-230	35°52'24.8"N 128°22'38.0"E	-	RNAV 1	IAF

Change : Information of standard instrument departure procedure for RWY 13L/R.

INTENTIONALLY

LEFT

BLANK

**STANDARD ARRIVAL CHART
INSTRUMENT (STAR) - ICAO**

Note : Arrival under ICAO Flight Procedures.


TRANSITION ALT 14 000
TRANSITION LVL FL 140

DAEGU APP 135.9 346.3
DAEGU TWR 126.2 236.6
365.0

DAEGU/Daegu Intl(RKTN)

RWY 31L/R

RNAV BITUX 1U RNAV OPEDA 1U
RNAV IGDOK 1U RNAV MASTA 1U
RNAV KALOD 1U RNAV LAPAL 1U

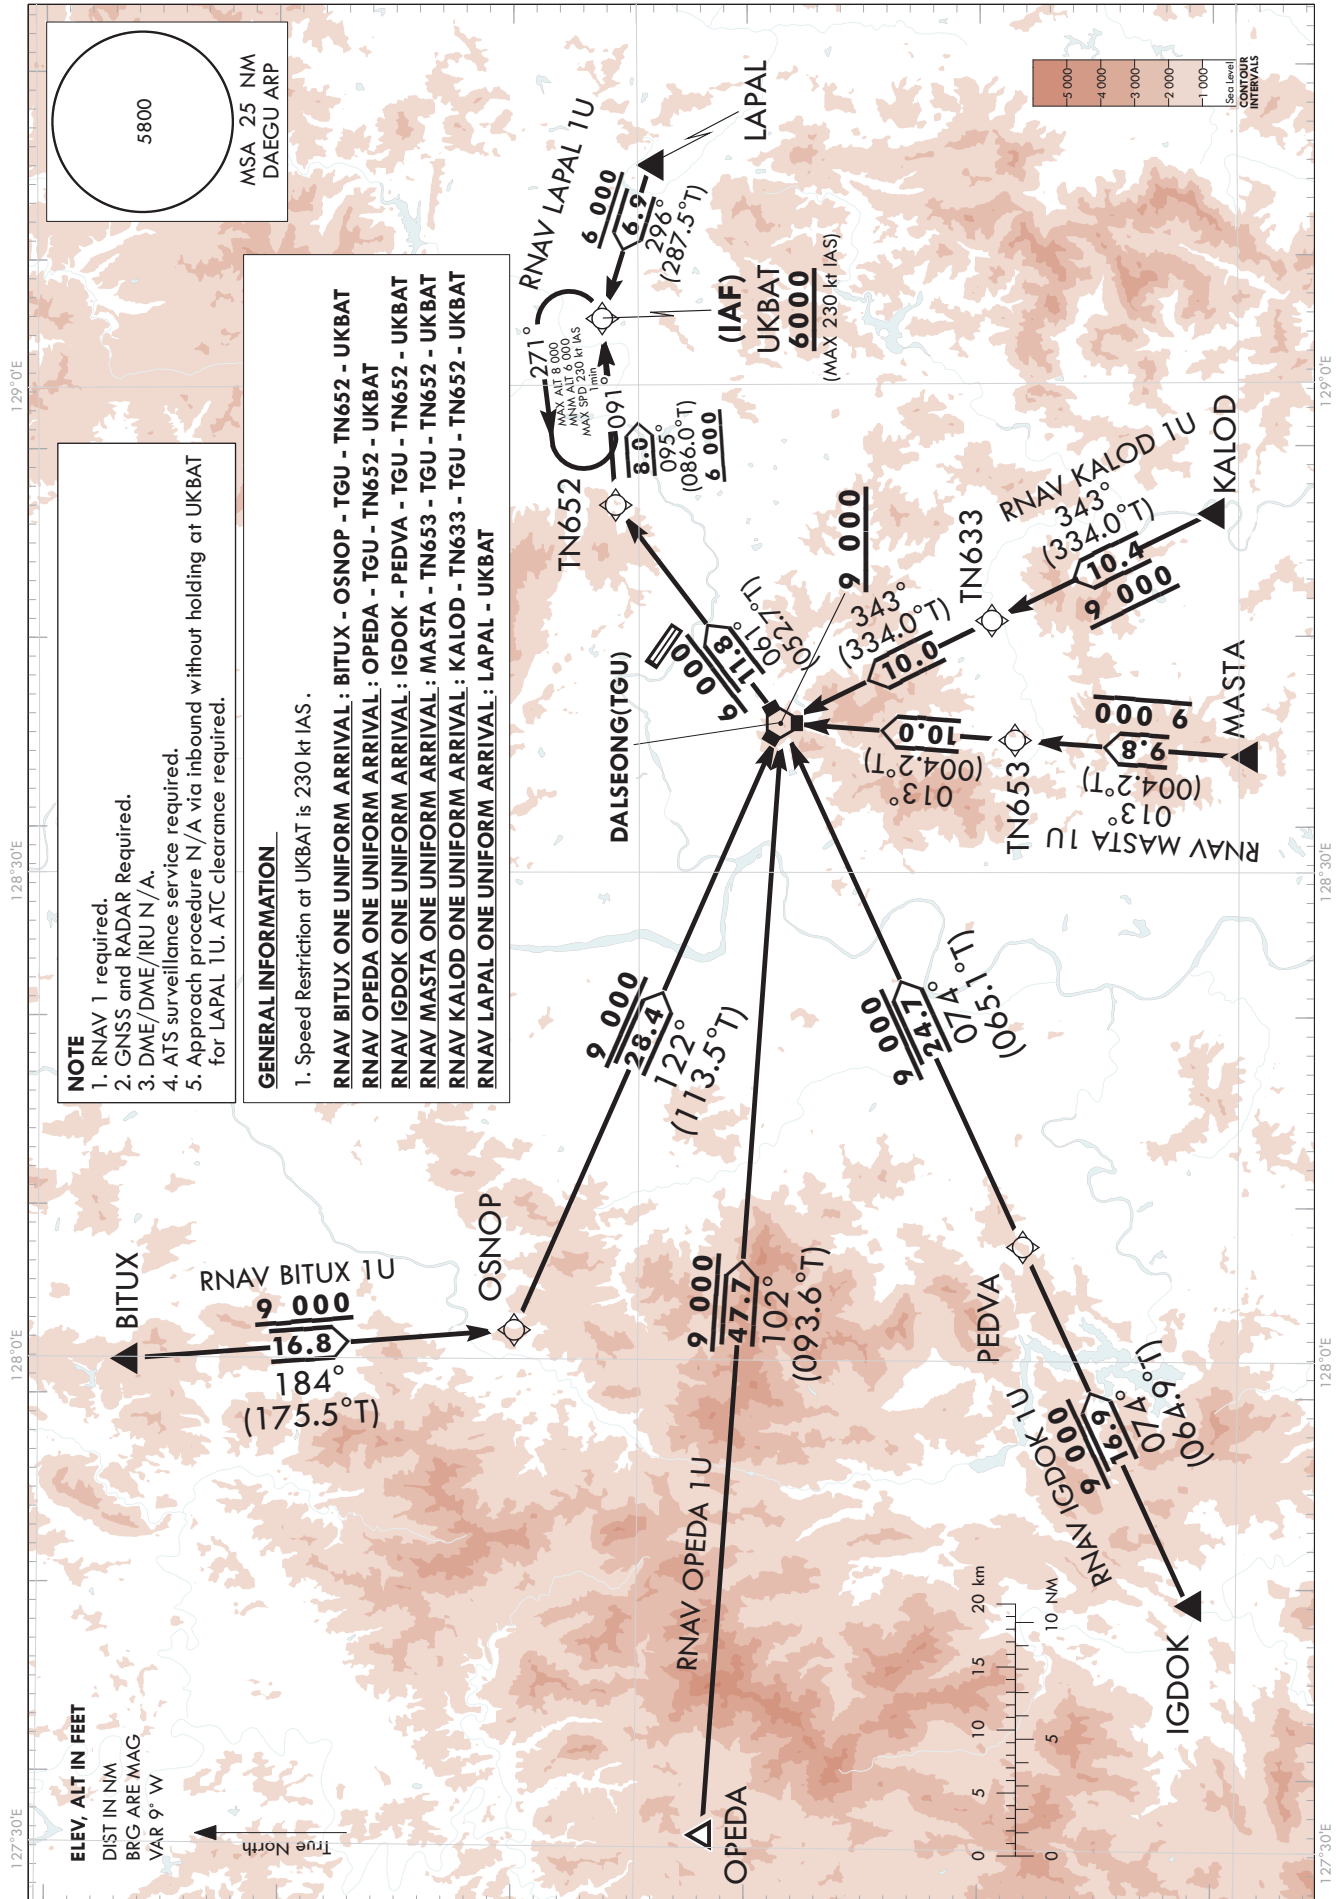

Change : Information of standard instrument departure procedure for RWY 13L/R, 31L/R.

DAEGU/Daegu INTL(RKTN)
RWY 31L/R
RNAV BITUX 1U RNAV OPEDA 1U
RNAV IGDOK 1U RNAV MASTA 1U
RNAV KALOD 1U RNAV LAPAL 1U

AERONAUTICAL DATA TABULATION

Standard Instrument Arrival Procedure Coding Tables

RNAV BITUX 1U

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track M(T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	BITUX	-	-	-	-	-	-	36°16'44.9"N 128°01'47.9"E	-	RNAV 1	-
002	TF	OSNOP	-	184(175.5)	16.8	-	+9 000	-	36°00'00.7"N 128°03'25.6"E	-	RNAV 1	-
003	TF	TGU	-	122(113.5)	28.4	-	+9 000	-	35°48'35.4"N 128°35'26.8"E	-	RNAV 1	-
004	TF	TN652	-	061(052.7)	11.8	-	+6 000	-	35°55'43.2"N 128°46'57.0"E	-	RNAV 1	-
005	TF	UKBAT	-	095(086.0)	8.0	-	+6 000	-230	35°56'16.5"N 128°56'47.1"E	-	RNAV 1	IAF

RNAV OPEDA 1U

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track M(T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	OPEDA	-	-	-	-	-	-	35°51'48.5"N 127°36'52.0"E	-	RNAV 1	-
002	TF	TGU	-	102(093.6)	47.7	-	+9 000	-	35°48'35.4"N 128°35'26.8"E	-	RNAV 1	-
003	TF	TN652	-	061(052.7)	11.8	-	+6 000	-	35°55'43.2"N 128°46'57.0"E	-	RNAV 1	-
004	TF	UKBAT	-	095(086.0)	8.0	-	+6 000	-230	35°56'16.5"N 128°56'47.1"E	-	RNAV 1	IAF

RNAV IGDOK 1U

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track M(T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	IGDOK	-	-	-	-	-	-	35°31'03.6"N 127°49'06.6"E	-	RNAV 1	-
002	TF	PEDVA	-	074(064.9)	16.9	-	+9 000	-	35°38'13.0"N 128°07'54.2"E	-	RNAV 1	-
003	TF	TGU	-	074(065.1)	24.7	-	+9 000	-	35°48'35.4"N 128°35'26.8"E	-	RNAV 1	-
004	TF	TN652	-	061(052.7)	11.8	-	+6 000	-	35°55'43.2"N 128°46'57.0"E	-	RNAV 1	-
005	TF	UKBAT	-	095(086.0)	8.0	-	+6 000	-230	35°56'16.5"N 128°56'47.1"E	-	RNAV 1	IAF

Change : Information of standard instrument arrival procedure for RWY 31L/R.

DAEGU/Daegu INTL(RKTN)
RWY 31L/R
RNAV BITUX 1U RNAV OPEDA 1U
RNAV IGDOK 1U RNAV MASTA 1U
RNAV KALOD 1U RNAV LAPAL 1U

AERONAUTICAL DATA TABULATION

Standard Instrument Arrival Procedure Coding Tables

RNAV MASTA 1U

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track M(T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	MASTA	-	-	-	-	-	-	36°28'47.0"N 128°33'39.6"E	-	RNAV 1	-
002	TF	TN653	-	013(004.2)	9.8	-	+9 000	-	35°38'36.1"N 128°34'32.6"E	-	RNAV 1	IAF
003	TF	TGU	-	013(004.2)	10.0	-	+9 000	-	35°48'35.4"N 128°35'26.8"E	-	RNAV 1	-
004	TF	TN652	-	061(052.7)	11.8	-	+6 000	-	35°55'43.2"N 128°46'57.0"E	-	RNAV 1	-
005	TF	UKBAT	-	095(086.0)	8.0	-	+6 000	-230	35°56'16.5"N 128°56'47.1"E	-	RNAV 1	IAF

RNAV KALOD 1U

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track M(T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	KALOD	-	-	-	-	-	-	35°30'12.1"N 128°46'26.5"E	-	RNAV 1	-
002	TF	TN633	-	343(334.0)	10.4	-	+9 000	-	35°39'35.5"N 128°40'50.3"E	-	RNAV 1	-
003	TF	TGU	-	343(334.0)	10.0	-	+9 000	-	35°48'35.4"N 128°35'26.8"E	-	RNAV 1	-
004	TF	TN652	-	061(052.7)	11.8	-	+6 000	-	35°55'43.2"N 128°46'57.0"E	-	RNAV 1	-
005	TF	UKBAT	-	095(086.0)	8.0	-	+6 000	-230	35°56'16.5"N 128°56'47.1"E	-	RNAV 1	IAF

RNAV LAPAL 1U

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track M(T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	LAPAL	-	-	-	-	-	-	35°54'12.6"N 129°04'52.0"E	-	RNAV 1	-
002	TF	UKBAT	-	296(287.5)	6.9	-	+6 000	-230	35°56'16.5"N 128°56'47.1"E	-	RNAV 1	IAF

HOLDING PROCEDURE

Holding Identification	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track M(T)	Time (min)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
RNAV BITUX 1U RNAV OPEDA 1U RNAV IGDOK 1U RNAV MASTA 1U RNAV KALOD 1U RNAV LAPAL 1U	HM	UKBAT	Y	091(082.2)	1.0	L	-8 000 +6 000	-230	35°56'16.5"N 128°56'47.1"E	-	RNAV 1	-

Change : Information of standard instrument arrival procedure for RWY 31L/R.

INTENTIONALLY

LEFT

BLANK