

**STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO**


Note : Departure under ICAO Flight Procedures.

TRANSITION ALT 14 000
TRANSITION LVL FL 140

JUNGWON DEP 129.65
CHEONGJU TWR 118.7 126.2

CHEONGJU/Cheongju INTL(RKTU)

RWY 06L/R
RNP GUKDO 1D, RNP OLMEN 1D
RNP BULTI 1D, RNP MAKDU 1D
RNP OSPOT 1D

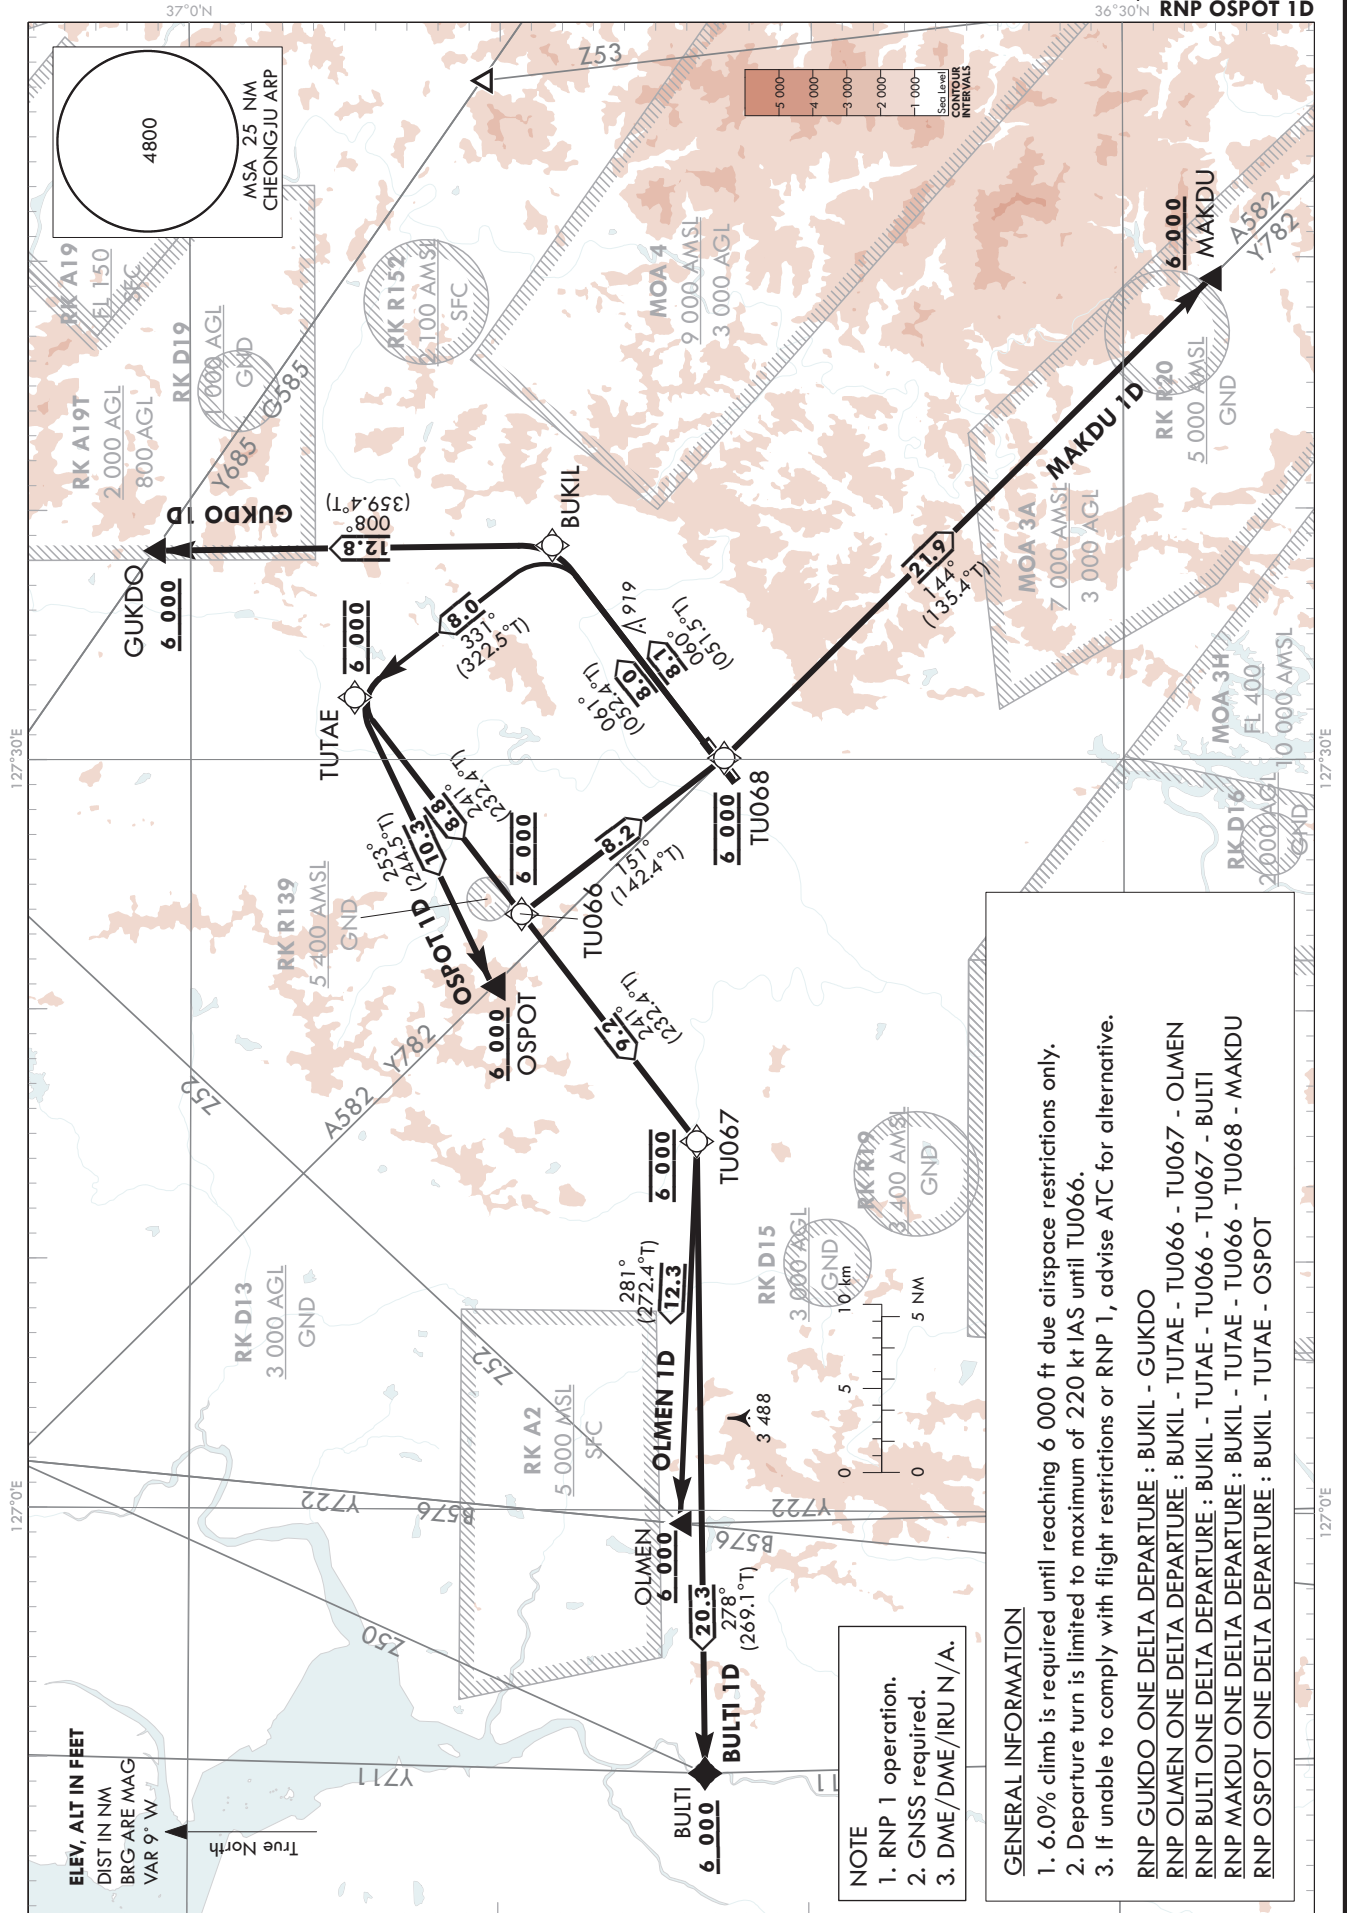

Change : Establishment and Information of standard instrument departure procedure for RWY 06L/R.

CHEONGJU/Cheongju INTL(RKTU)

RWY 06L/R

RNP GUKDO 1D, RNP OLMEN 1D

RNP BULTI 1D

AERONAUTICAL DATA TABULATION

Standard Instrument Departure Procedure Coding Tables

RNP GUKDO 1D

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	BUKIL	-	06L-061(052.4) 06R-060(051.5)	06L-8.0 06R-8.1	-	-	-220	36°48'23.2"N 127°38'33.7"E	-	RNP 1	-
002	TF	GUKDO	-	008(359.4)	12.8	-	+6 000	-	37°01'10.9"N 127°38'22.9"E	-	RNP 1	-

RNP OLMEN 1D

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	BUKIL	-	06L-061(052.4) 06R-060(051.5)	06L-8.0 06R-8.1	-	-	-220	36°48'23.2"N 127°38'33.7"E	-	RNP 1	-
002	TF	TUTAE	-	331(322.5)	8.0	-	@6 000	-220	36°54'44.4"N 127°32'29.4"E	-	RNP 1	-
003	TF	TU066	-	241(232.4)	8.8	-	@6 000	-220	36°49'22.4"N 127°23'49.1"E	-	RNP 1	-
004	TF	TU067	-	241(232.4)	9.2	-	@6 000	-	36°43'43.8"N 127°14'44.4"E	-	RNP 1	-
005	TF	OLMEN	-	281(272.4)	12.3	-	+6 000	-	36°44'13.4"N 126°59'27.6"E	-	RNP 1	-

RNP BULTI 1D

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	BUKIL	-	06L-061(052.4) 06R-060(051.5)	06L-8.0 06R-8.1	-	-	-220	36°48'23.2"N 127°38'33.7"E	-	RNP 1	-
002	TF	TUTAE	-	331(322.5)	8.0	-	@6 000	-220	36°54'44.4"N 127°32'29.4"E	-	RNP 1	-
003	TF	TU066	-	241(232.4)	8.8	-	@6 000	-220	36°49'22.4"N 127°23'49.1"E	-	RNP 1	-
004	TF	TU067	-	241(232.4)	9.2	-	@6 000	-	36°43'43.8"N 127°14'44.4"E	-	RNP 1	-
005	TF	BULTI	-	278(269.1)	20.3	-	+6 000	-	36°43'22.3"N 126°49'29.7"E	-	RNP 1	-

Change : Establishment and Information of standard instrument departure procedure for RWY 06L/R.

CHEONGJU/Cheongju INTL(RKTU)

RWY 06L/R

RNP GUKDO 1D, RNP OLMEN 1D

RNP BULTI 1D

AERONAUTICAL DATA TABULATION

Standard Instrument Departure Procedure Coding Tables

RNP MAKDU 1D												
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/RDH	Navigation specification	Remarks
001	CF	BUKIL	-	06L-061(052.4) 06R-060(051.5)	06L-8.0 06R-8.1	-	-	-220	36°48'23.2"N 127°38'33.7"E	-	RNP 1	-
002	TF	TUTAE	-	331(322.5)	8.0	-	@6 000	-220	36°54'44.4"N 127°32'29.4"E	-	RNP 1	-
003	TF	TU066	-	241(232.4)	8.8	-	@6 000	-220	36°49'22.4"N 127°23'49.1"E	-	RNP 1	-
004	TF	TU068	-	151(142.4)	8.2	-	@6 000	-	36°42'51.7"N 127°30'03.3"E	-	RNP 1	-
005	TF	MAKDU	-	144(135.4)	21.9	-	+6 000	-	36°27'12.3"N 126°49'09.0"E	-	RNP 1	-

RNP OSPOT 1D												
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	BUKIL	-	06L-061(052.4) 06R-060(051.5)	06L-8.0 06R-8.1	-	-	-220	36°48'23.2"N 127°38'33.7"E	-	RNP 1	-
002	TF	TUTAE	-	331(322.5)	8.0	-	@6 000	-220	36°54'44.4"N 127°32'29.4"E	-	RNP 1	-
003	TF	OSPOT	-	253(244.5)	10.3	-	+6 000	-	36°50'18.1"N 127°20'54.9"E	-	RNP 1	-

Change : Establishment and Information of standard instrument departure procedure for RWY 06L/R.

INTENTIONALLY

LEFT

BLANK


STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO

Note : Departure under ICAO Flight Procedures.

TRANSITION ALT 14 000
TRANSITION LVL FL 140

JUNGWON DEP 129.65
CHEONGJU TWR 118.7 126.2

CHEONGJU/Cheongju INTL(RKTU)
RWY 24L/R
RNP GUKDO 1C, RNP OLMEN 1C
RNP BULTI 1C, RNP MAKDU 1C
RNP OSPOT 1C

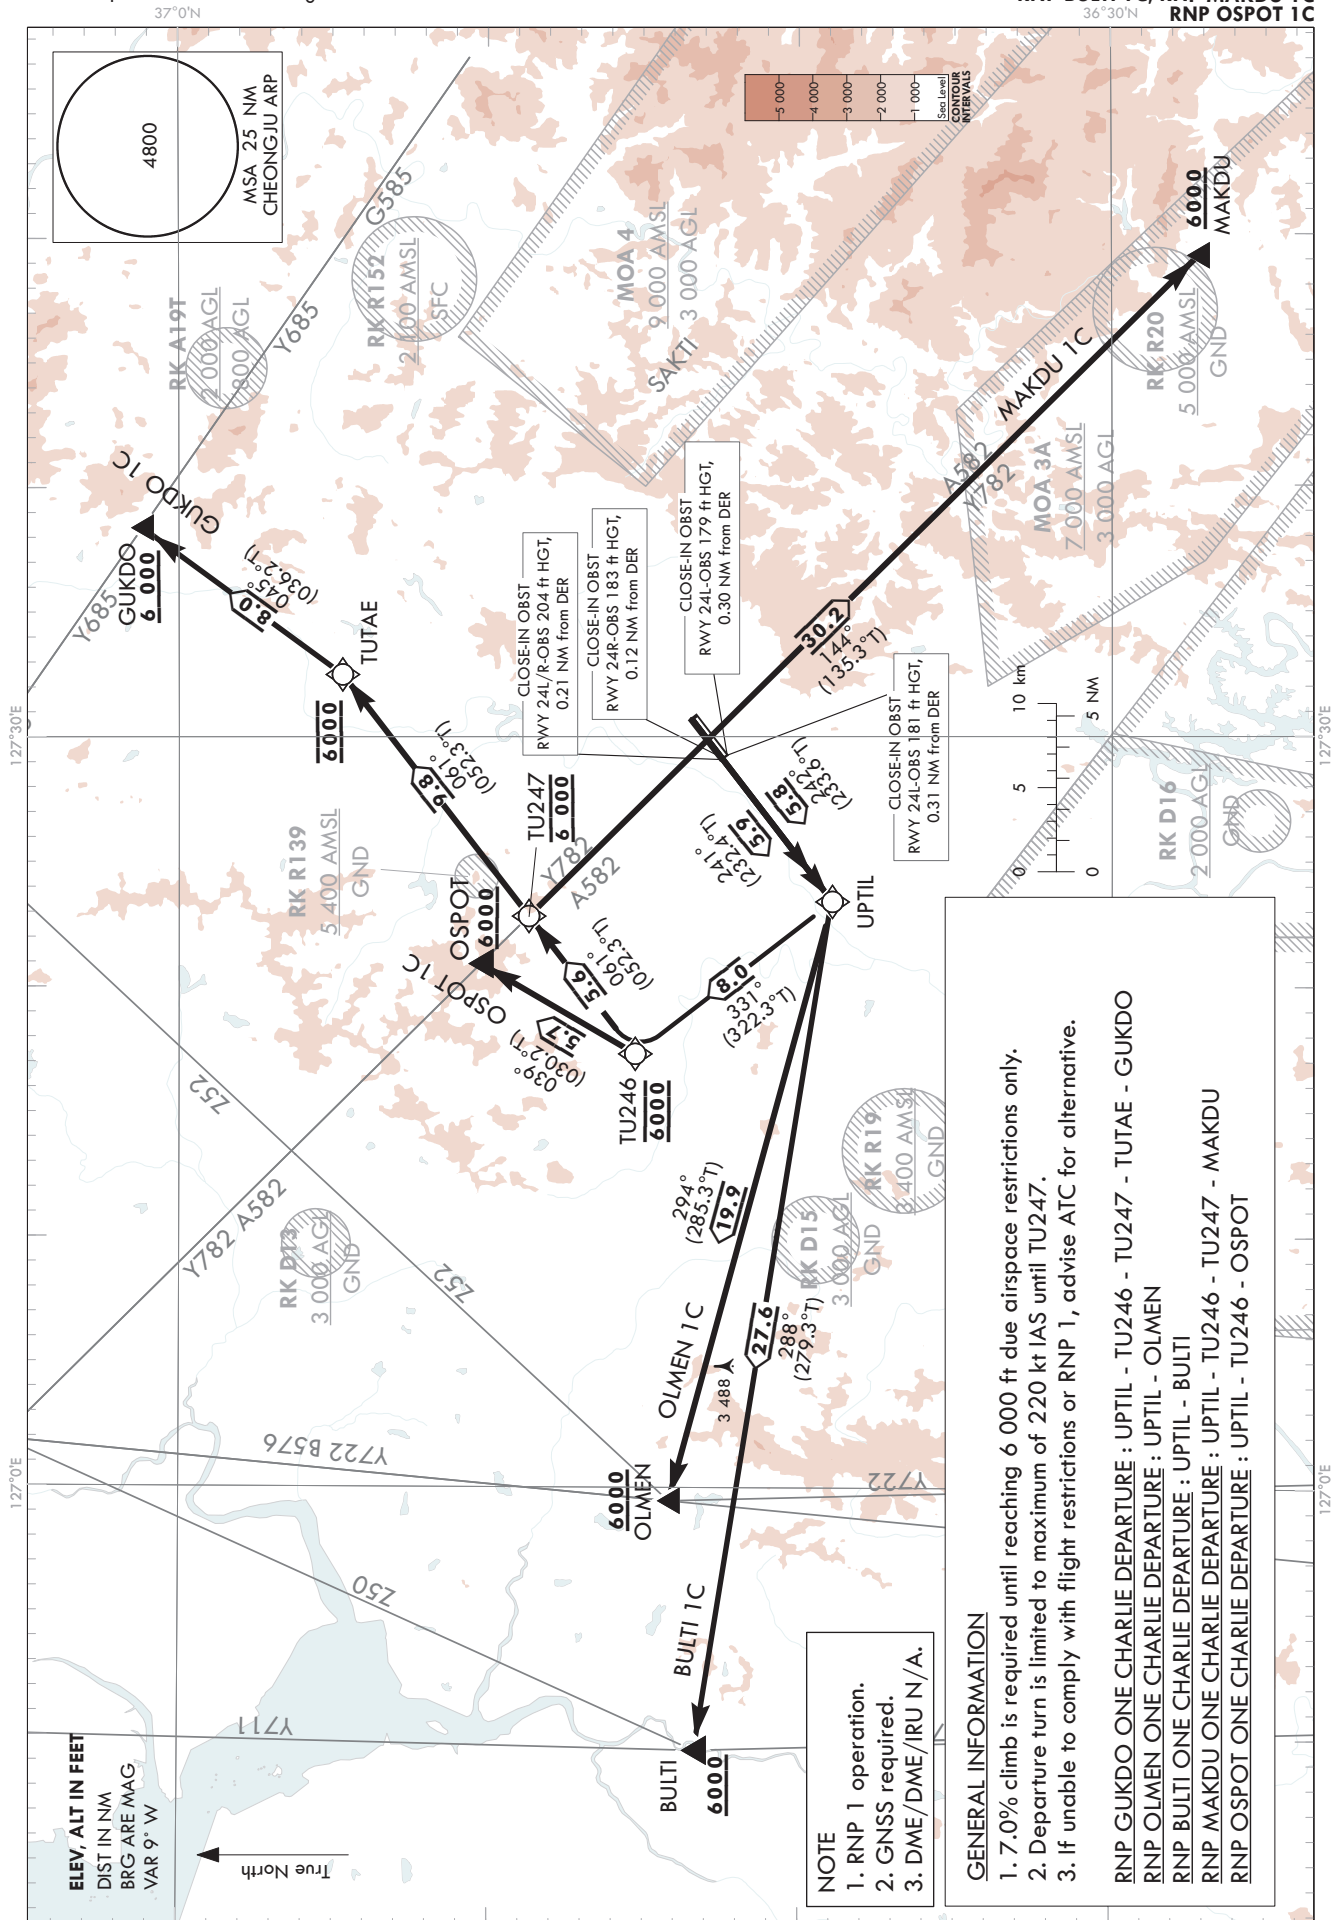

Change : Establishment and Information of standard instrument departure procedure for RWY 24L/R.

CHEONGJU/Cheongju INTL(RKTU)

RWY 24L/R

RNP GUKDO 1C, RNP OLMEN 1C

RNP BULTI 1C

AERONAUTICAL DATA TABULATION

Standard Instrument Departure Procedure Coding Tables

RNP GUKDO 1C

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/RDH	Navigation specification	Remarks
001	CF	UPTIL	-	24L-242(233.6) 24R-241(232.4)	24L-5.8 24R-5.9	-	-	-220	36°38'59.7"N 127°23'23.8"E	-	RNP 1	-
002	TF	TU246	-	331(322.3)	8.0	-	@6 000	-220	36°45'19.8"N 127°17'19.1"E	-	RNP 1	-
003	TF	TU247	-	061(052.3)	5.6	-	@6 000	-220	36°48'45.1"N 127°22'49.3"E	-	RNP 1	-
004	TF	TUTAE	-	061(052.3)	9.8	-	@6 000	-	36°54'44.4"N 127°32'29.4"E	-	RNP 1	-
005	TF	GUKDO	-	045(036.2)	8.0	-	+6 000	-	37°01'10.9"N 127°38'22.9"E	-	RNP 1	-

RNP OLMEN 1C

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/RDH	Navigation specification	Remarks
001	CF	UPTIL	-	24L-242(233.6) 24R-241(232.4)	24L-5.8 24R-5.9	-	-	-220	36°38'59.7"N 127°23'23.8"E	-	RNP 1	-
002	TF	OLMEN	-	294(285.3)	19.9	-	+6 000	-	36°44'13.4"N 126°59'27.6"E	-	RNP 1	-

RNP BULTI 1C

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/RDH	Navigation specification	Remarks
001	CF	UPTIL	-	24L-242(233.6) 24R-241(232.4)	24L-5.8 24R-5.9	-	-	-220	36°38'59.7"N 127°23'23.8"E	-	RNP 1	-
002	TF	BULTI	-	288(279.3)	27.6	-	+6 000	-	36°43'22.3"N 126°49'29.7"E	-	RNP 1	-

Change : Establishment and Information of standard instrument departure procedure for RWY 24L/R.

CHEONGJU/Cheongju INTL(RKTU)

RWY 24L/R

RNP MAKDU 1C, RNP OSPOT 1C

AERONAUTICAL DATA TABULATION

Standard Instrument Departure Procedure Coding Tables

RNP MAKDU 1C

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	UPTIL	-	24L-242(233.6) 24R-241(232.4)	24L-5.8 24R-5.9	-	-	-220	36°38'59.7"N 127°23'23.8"E	-	RNP 1	-
002	TF	TU246	-	331(322.3)	8.0	-	@6 000	-220	36°45'19.8"N 127°17'19.1"E	-	RNP 1	-
003	TF	TU247	-	061(052.3)	5.6	-	@6 000	-220	36°48'45.1"N 127°22'49.3"E	-	RNP 1	-
004	TF	MAKDU	-	144(135.3)	30.2	-	+6 000	-	36°27'12.3"N 127°49'09.0"E	-	RNP 1	-

RNP OSPOT 1C

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	UPTIL	-	24L-242(233.6) 24R-241(232.4)	24L-5.8 24R-5.9	-	-	-220	36°38'59.7"N 127°23'23.8"E	-	RNP 1	-
002	TF	TU246	-	331(322.3)	8.0	-	@6 000	-220	36°45'19.8"N 127°17'19.1"E	-	RNP 1	-
003	TF	OSPOT	-	039(030.2)	5.7	-	@6 000	-	36°50'18.1"N 127°20'54.9"E	-	RNP 1	-

Change : Establishment and Information of standard instrument departure procedure for RWY 24L/R.

INTENTIONALLY

LEFT

BLANK


**STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO**

TRANSITION ALT 14 000
TRANSITION LVL FL 140

JUNGWON DEP 129.65
CHEONGJU TWR 118.7 126.2

CHEONGJU/Cheongju INTL(RKTU)
RWY 06L/R RADAR 1D
RWY 24L/R RADAR 1C

Note : Departure under ICAO Flight Procedures.

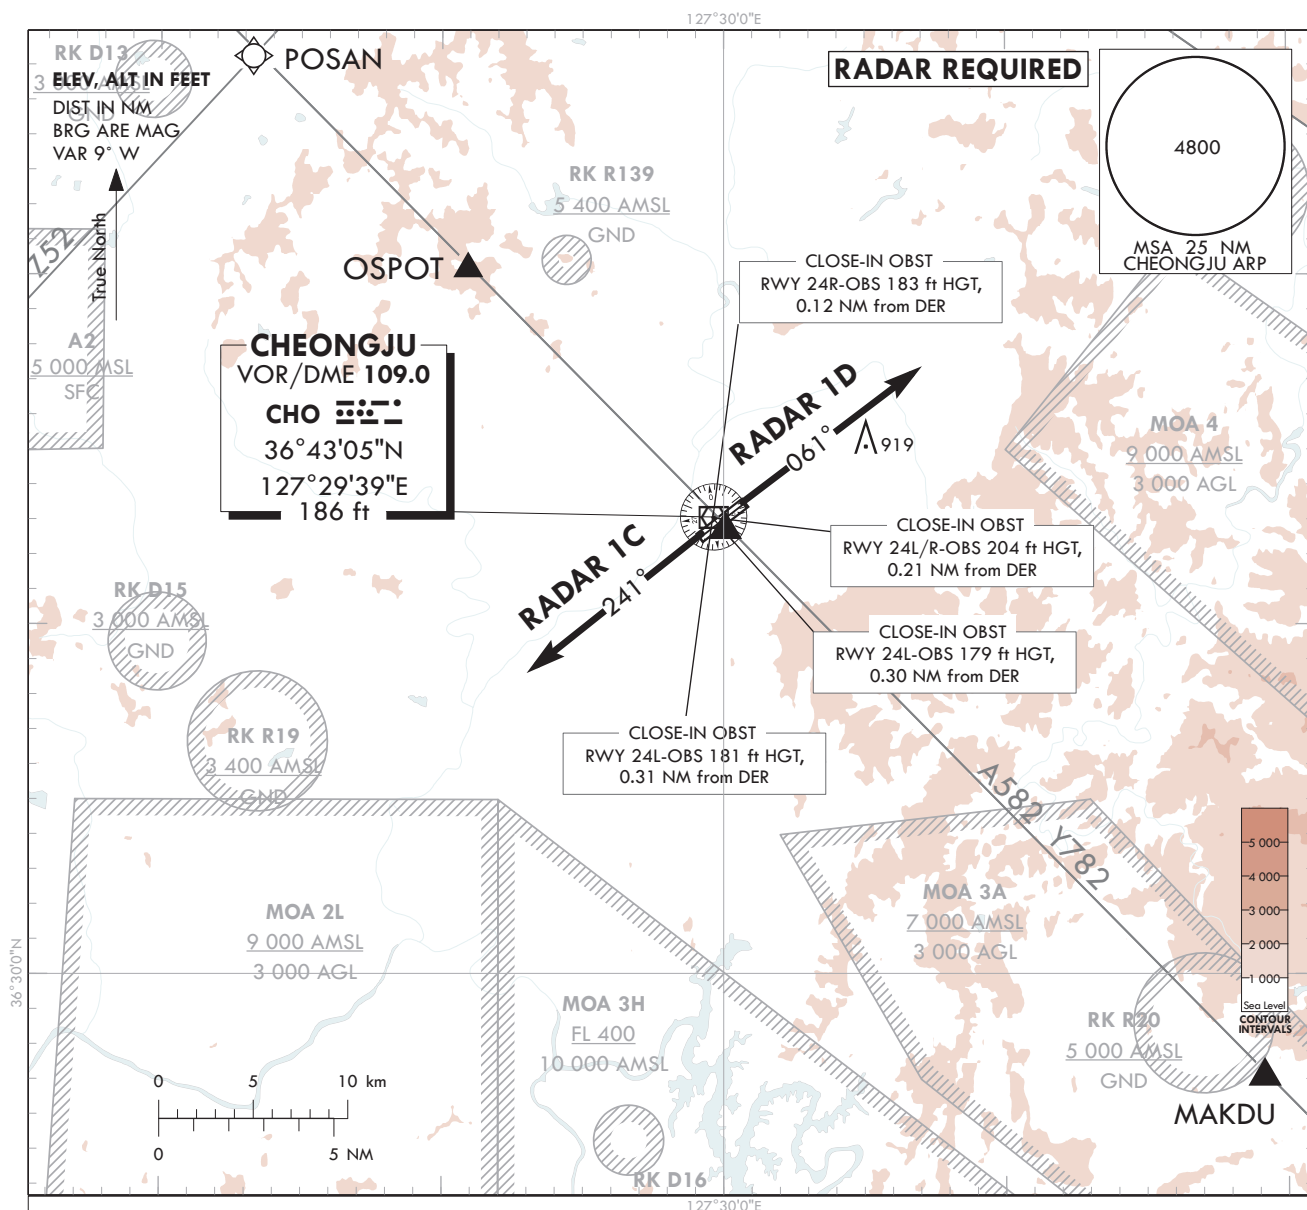

GENERAL INFORMATION

1. 7.0% CG required until 5 000 ft due airspace restrictions only.
2. Pilot shall use caution not to enter restricted areas around airport.

RADAR ONE DELTA DEPARTURE

TAKE OFF RWY 06L/R : Climb HDG 061° expect radar vectors to intercept filed Enroute fix or Navaid.
Maintain 6 000 ft or assigned altitude(flight level).
Expect filed altitude/flight level within 10 minutes after departure.

RADAR ONE CHARLIE DEPARTURE

TAKE OFF RWY 24L/R : Climb HDG 241° Expect radar vectors to intercept filed Enroute fix or Navaid.
Maintain 6 000 ft or assigned altitude(flight level).
Expect filed altitude/flight level within 10 minutes after departure.

LOST COMMUNICATIONS PROCEDURE

If radio contact is not established with departure control prior to reaching 5 000 ft, continue climbing and proceed filed route and altitude.

Change : Information of standard instrument departure procedure for RWY 06L/R, 24L/R.

INTENTIONALLY

LEFT

BLANK