
Thank you for choosing GOOLOO jump starter. To ensure a good user experience, personal safety, and property security, please read all of the instructions carefully before using this product, please keep this manual for easy reference.

# **▲**Charge It First!

While reading through the manual, you can begin to charge up your GP4000 with your mobile phone charger and the type-c cable attached.

# **Parts and Functional Description**

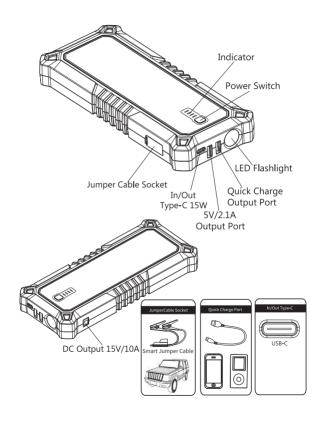

## **Operation Instructions**

#### **Battery Indicator:**

Press the power switch to check the battery power:

Indicator	Unlit	1 Solid	2 Solid	3 Solid	4 Solid
Battery Power	0%	25%	50%	75%	100%

The indicator will blink one by one during the period of charging. Different numbers of solid indicators show different battery power. All indicators will be turned off automatically when the charging process has finished.

#### How to Charge the GP4000


This unit can be charged with a type-c cable attached and a 5V wall charger(phone charger) or car charger. (Note: 5V wall charger and car charger is not included)

(Only via the QC3.0 wall charger or car charger can achieve the quick charge input function, QC3.0 wall charger and car charger can be purchased separately.)



#### How to Start a Vehicle

Make sure this unit is over 50% charged (check the battery indicator ≥ 2 bars). If this unit has not been used in more than two months, you should charge it first.



#### **How to Use the Smart Cable**

1. First, plug the blue connector of the intelligent battery clamp into the main unit, ensuring that the clamp's indicator light is off.



2.Next, correctly connect the battery clamp to the positive and negative terminals of the car battery. Attach the red clamp to the positive terminal (+) and the black clamp to the negative terminal (-).

3.Then, follow the corresponding operation based on the battery clamp's indicator light:

**Solid green light:** This indicates that the connection is correct and powered on. You can now proceed with the emergency jump-start.



**Solid red light:** This indicates that the positive and negative terminals are incorrectly connected. Please reconnect them correctly, and once the green light turns solid, proceed with the emergency jump-start.



**Flashing green light:** This indicates that the battery voltage is too low. Press the BOOST button, and once the green light turns solid, complete the jump-start within 30 seconds.



**No red or green light:** This may indicate that the battery is completely damaged. Ensure the positive and negative terminals are correctly connected, then press the BOOST button. Once the green light turns solid, complete the jump-start within 30 seconds.



#### 15V/10A DC Output (12-16.8V,150W Max)

## **●** Cigarette Lighter Socket Output

Connect the 12V devices that need to be powered by cigarette lighter socket.

#### ●5.5\*2.1mm DC Output

You can connect the 12V devices that need to be powered by the 12V DC port. Please check if the devices support 12V DC input ( the diameter of the DC port is 5.5\*2.1mm) . If not, you will not be able to use the DC output.

#### **Protection Mode**

**Short Circuit /Overload Protection:** If the 15V/10A DC port is short circuit or overload (load power>150W), this unit will shut off automatically for self-protection. Resolve short circuit or overload problems and recharge this unit to reset from protection mode.

#### **How to Charge Your Phone or Tablet**

- Plug the charging cable into USB-A port and your devices.
- 2. Press the power switch, the unit can identify your device and charge it automatically. The battery indicators will be lit up when charging.



## How To Turn On/Off The LED Flashlight

Long press the power switch 3 seconds to start the LED light. There are 3 modes of LED light appear in order (Normal, Strobe, SOS, Off) if you press slightly.

## **Product Highlights**

**Powerful And Reliable Car Jump Starter:** The GP4000 can quickly jump start a dead car battery. Even if the battery voltage is too low, pressing the "BOOST" button will force the car to restart. The GP4000 can start all gasoline engines and diesel engines up to 10.0L in just a few seconds. This includes 12v vehicles, motorcycles, pickup trucks, RVs, tractors, trucks, cargo vans, ATVs, snowmobiles, yachts and many more.

**High Capacity Portable Charger:** The GP4000 jump starter is equipped with dual USB charging output ports (one supports fast charging) and a USB Type-C charging port (5V/3A). You can use it to charge other devices or recharge the Jump Starter itself. It can be taken anywhere and can quickly charge numerous portable devices, such as smartphones, tablets, cameras, GPS systems, and more.

**Emergency Life Saver:** The GOOLOO GP4000 jump starter can jump start vehicles in a matter of seconds so that you aren't stranded and unsafe for longer than needed. A full charge can boost most vehicles over 60 times!

**Safety & Quality Metal Clamps:** The GOOLOO battery jump starter built-in 10 types of protection, free your worries of misuse and sparks. We wanted to make sure our users feel 100% safe when using our product. The Smart Jumper Cables is constructed with all-metal clamps to prevent damage caused by long-term use.

**Rugged 12V Car Jump Starter:** The hardened plastic and rubber corners make sure the starter can withstand drops without any problem. A built-in flashlight can assist you in vehicle emergencies at night.

**Reliable in Extreme Cold Weather:** The upgraded smart chip in the GP4000 battery booster jump starter ensures fast and reliable car ignition in extreme temperatures ranging from -4°F to 140°F.

# **Package Content**

#	Part Name	Quantity
1	Host	1
2	EVA Box	1
3	USB-A to Type-C Cable	1
4	USB-C to USB-C Cable	1
5	Cigarette Lighter Socket Adapter	1
6	User Manual	1
7	Smart Jumper Cable	1

# **Technical Specification**

Input:	Type-C 15W (5V/3A)	
Output:	Type-C 15W (5V/3A), Quick Charge(5V/3A,9V/2A,12V/1.5A), 5V/2.1A,15V/10A	
Capacity:	88.8Wh	
Starting Current:	800A	
Peak Current:	4000A	
Size:	228*99.5*38mm	
Weight:	820g	
Operating Temp.	-20°C ~60°C/-4°F ~140°F	
Lifetime	>1000 cycles	
Full Charging Time:	6-8 Hours (5V/3A)	

# **Trouble Shooting**

TROUBLE	REASON	REMEDIES		
It has charged for a long time, but the fourth battery indicator is still blinking.	Battery power recognition problem.	Disconnect the charging cable and plug it in again, try to continue charging for hours.		
No response when pressing the power switch.	Low voltage protection is started.	Try to charge the unit with wall charger to activate it.		
This unit can not be charged, the first battery indicator blinks all the time.	The unit is over discharged or defective	Please contact us fiona@gooloo.com		
This unit is over heated or swelled.	The unit is over discharged or defective	Please contact us fiona@gooloo.com		

If there is any other problem with this unit, please contact us directly at **fiona@gooloo.com**, we will do our best to solve the problem within 24 hours.

## **Toxic and Harmful Substances**

Composition and amount of toxic or harmful substance in this product

Pb Hg Cd Cr(Vi) PBB PBDE

0 0 0 0 0 0 0

0: Indicate that the content of harmful substances in all homogeneous materials is all lower than the prescribed limit of MCV (the standard 2002/95/EC/

## **FAQ**

**Q1:** What is the operating temperature of this unit and how to store it?

**A:** This unit is lithium polymer battery, operating temp is -20-60 °C/ -4-140°F. If the ambient temperature is higher than 60°C/140°F, the internal construction of the polymer lithium-ion cells will be damaged, it may swell and become unsafe. So don't store the device in vehicle which parked in hot weather for long periods of time.

Q2: How to start a vehicle with this unit?

A: Please refer to the instructions about "How to Start a 12V Vehicle."

**Q3:** How do you know if this unit is connected to the vehicle correctly?

**A:** With the battery clamps connected to the vehicle battery, when the indicator on the jumper cable shines a steady green light, it means it's connected correctly. If red light is on and solid, it means it's reverse connection.

Q4: What should I do if this unit can't start a vehicle?

**A:** Recharge this unit fully, and try to press the "BOOST" button on the jumper cable, wait the **GREEN LIGHT on and solid**, then start the vehicle within 30s. If it still does not work, contact us at: fiona@gooloo.com ( Attach your order ID).

**Q5:** What should I do if this unit can't be charged?

**A:** Charge it with a USB-C cable and 5V wall charger to activate it. If it still does not work, contact us at fiona@gooloo.com(Attach your order ID. ).

**Q6:** What should I do if this unit can't charge other devices?

**A:** Try to use another charging cable to charge it again. If it can charge with another one, the charging cable attached is defective; Contact us we will provide you a new one. If it still does not work, email us at: fiona@gooloo.com (Attach your order ID).

Q7: How to turn off this unit?

**A:** The unit will be turned off automatically in 30 seconds when it has no load.

**Q8:** Can this unit charge other devices while it is being charged?

A: Yes.

**Q9:** Can this unit charge other devices while starting a vehicle?

A: No.

Q10: How often does this unit need to recharge?

**A:** It would be best to be recharged every 3 months.

**Q11:** Why it shuts off in 30s when charging for other devices?

**A:** This product may not be able to charge for the devices that need weak current like iphone 6 series, headphone, smart watch,etc. Because this unit has a minimum load current (200mA). it will be automatically off after 30s if the load current is less than 200mA.



- 1. Read this instruction manual carefully before using this unit.
- 2. Use caution while using this unit. Injury to self, or damage to the unit or the vehicle battery if precautions are not followed.
- 3. Do Not allow to use by persons who do not have proper knowledge or ability to operate the device without supervision.
- 4. Do Not use as a toy. Keep the unit away from children to avoid accident.
- 5.This unit is for 12V vehicles only, it may not be suitable for other vehicles. It is forbidden to use for other machines such as aircraft, boats, etc.
- 6. Do Not use this unit if any cable, clamp, or cord is damaged or if the unit is overheated or swelled or leaking fluid.
- Do Not use in place of a vehicle battery or as a vehicle battery charger.
- 8. Do Not use the unit to start a vehicle while charging the internal battery.
- 9. Only use the jumper cable attached and use the correct and qualified charger to charge this unit.
- 10. Do Not let this unit over-discharge (do not let the battery run to empty), please charge it regularly; it would be best to recharge it every 3 months.

- 11. Make sure the blue plug of the jumper cable is plugged fully into the jumper socket; otherwise, the blue plug could melt.
- 12. Make sure the battery terminal are clean before starting, and make sure the battery clamps are well connected. If the battery terminals on the vehicle are dirty or corroded, the output power of the unit will be lessened.
- 13. Do Not connect the two clamps together.
- 14. Do Not connect the jump starter's clamps to the battery reversely while pressing the "BOOST" button to avoid accident.
- 15. Only use this unit to start the vehicle when the battery indicator is more than 2 bars.
- 16. Do Not keep the unit connected to the vehicle battery after successfully starting the engine. Remove the product from the vehicle battery after starting the engine. If not, it could lead to damage.
- 17. Do Not recharge this product immediately after using it to start the vehicle, please cool it down for 30 minutes before charging.
- 18. Do Not allow the product to become wet and Do Not immerse in water.
- 19. Do Not operate the product in explosive atmospheres, such as in the presence of flammable liquids, gases, or dust.

- 20. Do Not modify or disassemble the unit. Only a repair technician may repair this unit.
- 21. Do Not expose product to extreme heat or fire.
- 22. Do Not drop or crush the unit. If the unit has received a sharp blow or is damaged in any other way, a qualified battery technician should check it.
- 23. Do Not store in locations where the temperature may exceed  $60^{\circ}$ C/  $140^{\circ}$ F.
- 24. Charge only at ambient temperature between -10 $\sim$ 45 $^{\circ}$ C / 14 $\sim$ 113 $^{\circ}$ F.
- 25. Under extreme conditions, the battery may leak. If a liquid is leaking from the unit, Do Not handle with bare hands. In case of skin contact wash with soap and water immediately. If the liquid contacts to eyes, rinse eyes with cold running water for at least 10 minutes and get medical treatment immediately.
- 26. The unit contains the lithium-based batteries. At end of the product life, or if the unit is leaking liquid, dispose the unit according to local regulation.
- 27.Please do not start the product for more than three consecutive times, as this may cause it to overheat and damage the product. If you need to start the product multiple times, please make sure to wait for two minutes between each start-up.

# **Your Warranty Includes**

- 18 Months Online After- Sales Service Within 18 months, we will provide timely and effective online after- sales service after your purchase.
- 30 Days Money Back Guarantee
  Within the first 30 days after your purchase, you can apply return for it through Amazon when you have any issue.
- 30 Days to 18 Months
   We will replace the defective unit due to manufacturing issues with a new one within 18 months

#### Disclaimer

- **A.** The warranty is valid upon presentation of the original receipt (Order ID) by the original purchaser with the product need to be repaired or replaced.
- **B.** The warranty does not cover damage or product failure resulting from normal wear and tear, physical abuse, improper installation, misuse, modification or repairs by unauthorized third parties.
- **C.** We are not liable for any incidental or consequential damage that arises from incorrect use or misuse of this product.
- **D.** All warranty claims are limited to repair or replacement of the defective product and at the sole discretion of GOOLOO.





Do Not Submerge In Water



Do Not Disassemble



Do Not Drop



**Avoid Extreme Temperatures** 



Do Not Place Near or Into Fire



Overcharge/discharge Fuse Protection Against-reverse
Protection Plug



## **Customer Service**



18 Months Limited Warranty Service;



Lifetime Technical Service



Feel Free to Contact Us fiona@gooloo.com (US recommend) Support. eu@gooloo.com (EU recommend)



For FAQ and More Information www.gooloo.com



**1-888-886-1805** Mon.-Fri. PST 9:00a.m.-5:00p.m.

Manufacturer	Shenzhen Carku Technology Co.,Ltd		
Address	No.103, block A, Qixing Creative factory, GaoFeng		
	community, Dalang street, LongHua, Shenzhen,		
	Guangdong, China		
Importer	shen zhen shi lan de wo ke ji you xian gong si		
Address	Guangdong, Shenzhen, Longgang, 2nd Floor,		
	Building 12, Shenao Cultural Industry Park,		
	Dafapu Community, Bantian Street		
Tel	+442921680945		
UK Representative Name and contact	EVATOST CONSULTING LTD Office 101 32 Threadneedle Street, London, United Kingdom, ECZR 8AY OST_UK_202206080000011 contact@evatost.com We simply act as UK representative for cross-border sellers, and are not manufacturers/ importer/sidstributors for the product, nor involved in the manufacturer/sidstributors for the product. Therefore, we are not responsible for any after-sale services felled to importer/seller shall be softly held responsible.		



# Thank You for Choosing



Made in China