

## SERIES 95C

6mm Square, Non-washable



### FEATURES



- Excellent Tactile Feedback
- Thru-hole, Gull Wings, and Right Angle Versions
- Surface Mount Versions Compatible with SMT Assembly Including Infrared and Vapor Phase
- Ultraminiature and Lightweight Structure Suitable for High Density Mounting

### APPLICATIONS

Used in applications such as consumer electronics, audio equipment, PCs, VCRs, cable boxes, modems, communications equipment, controls, security and alarm equipment, and test and measurement equipment.

### DIMENSIONS: Non-Washable Switches in inches (and millimeters)

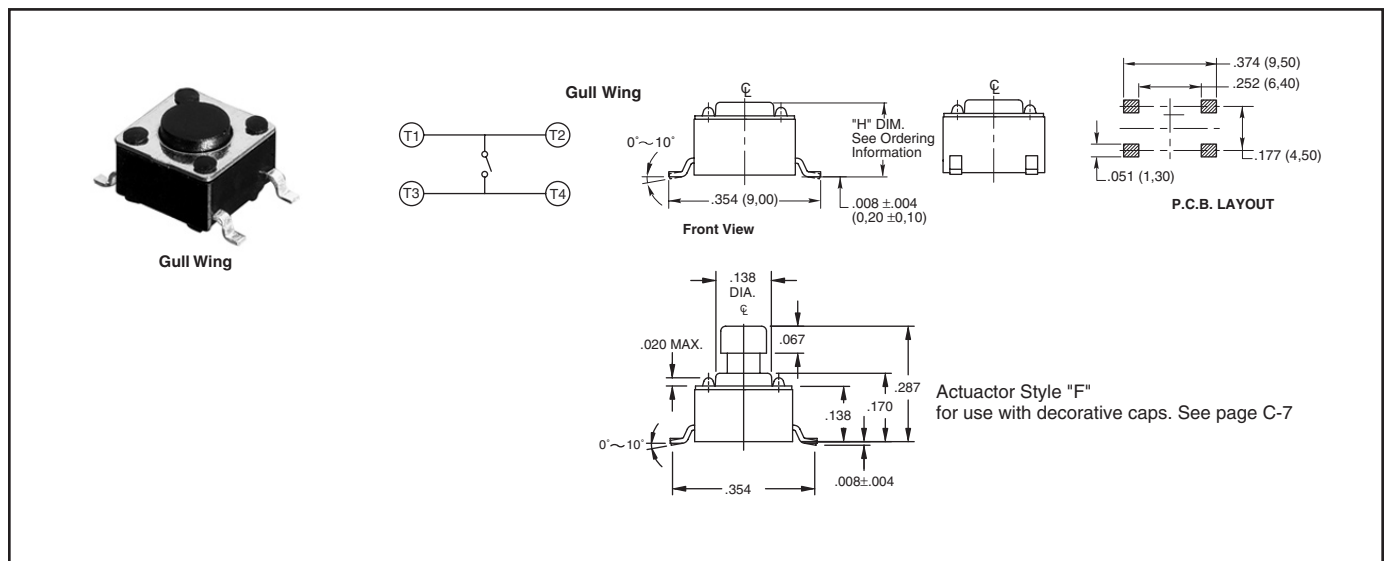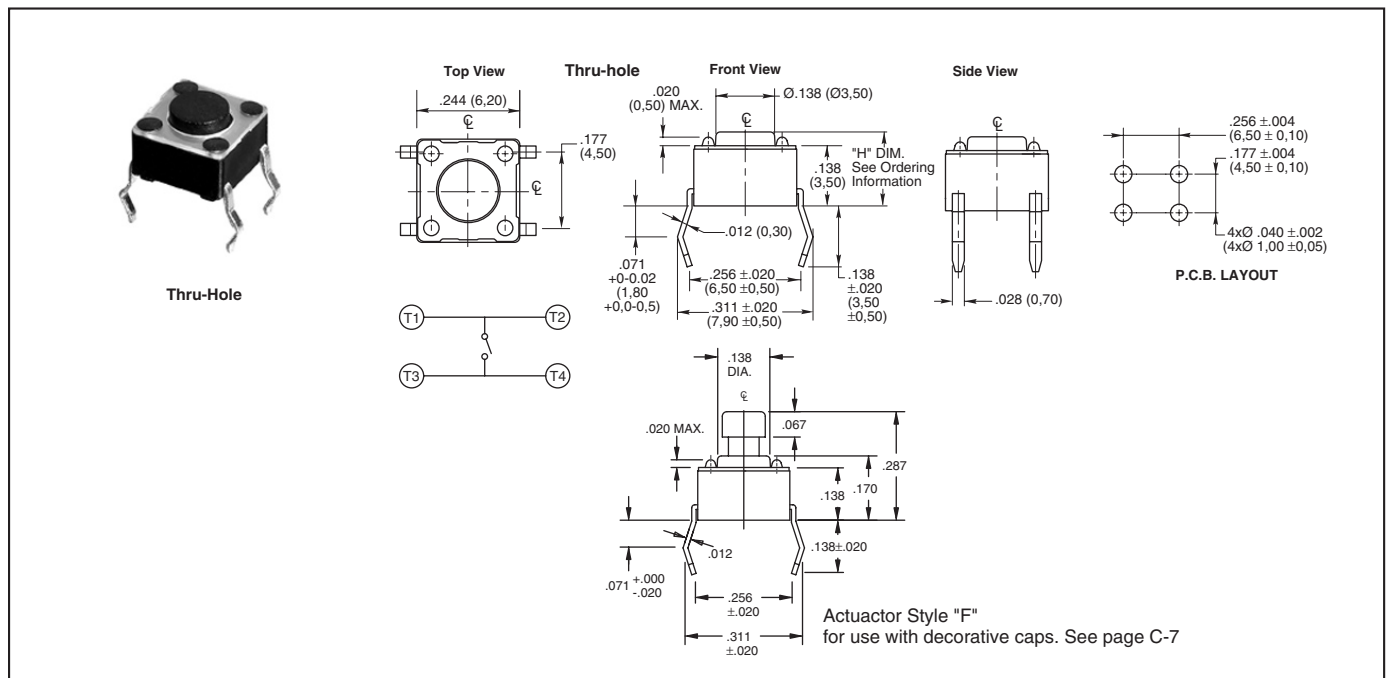

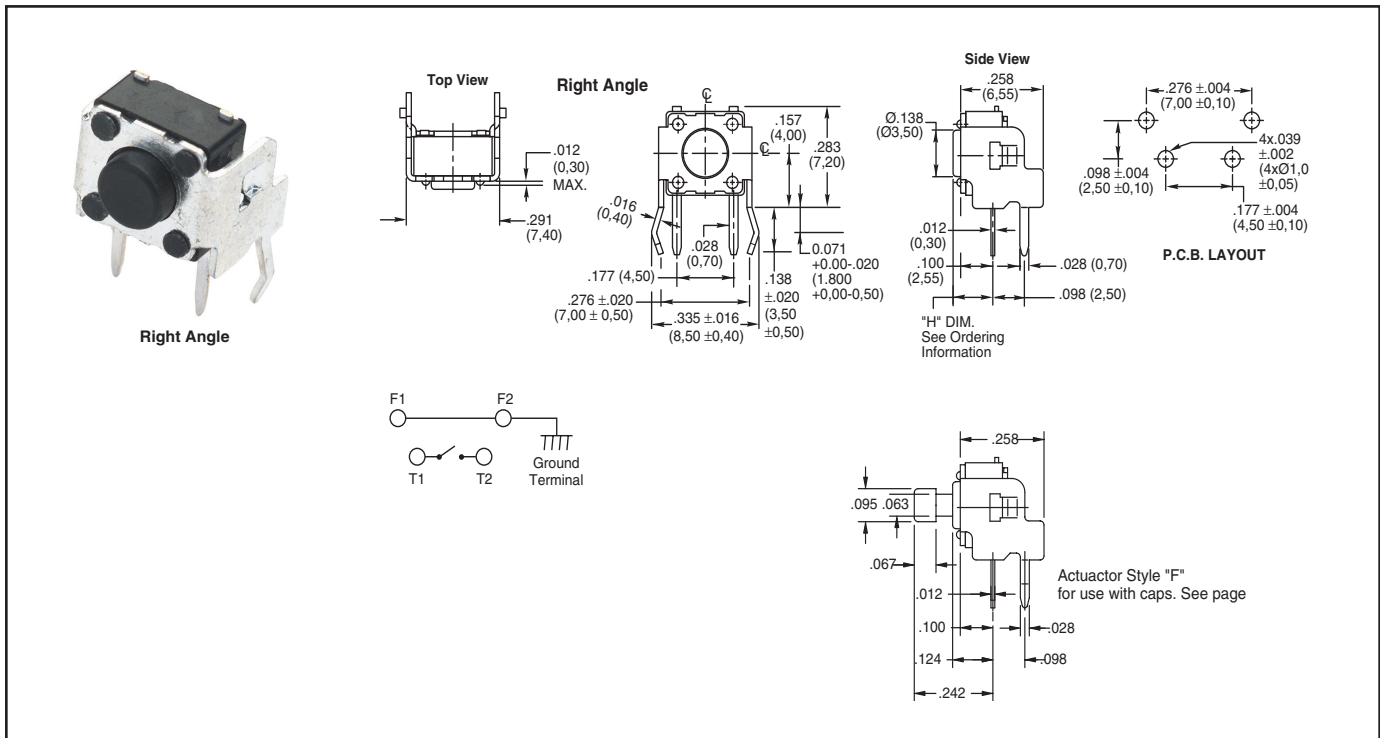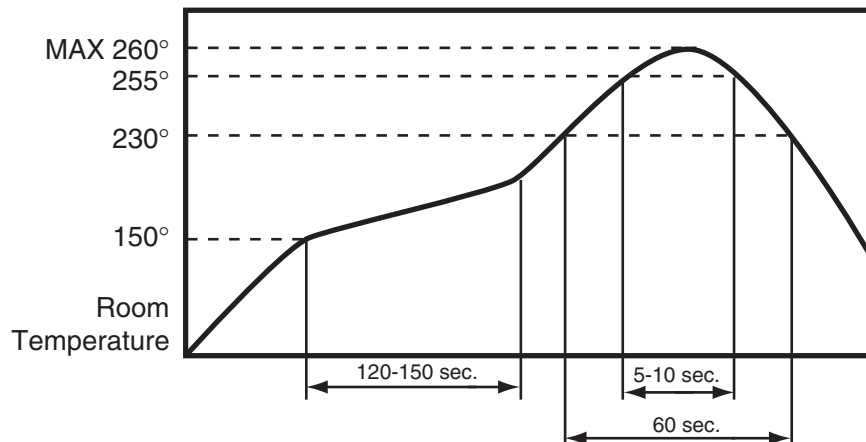**DIMENSIONS: Non-Washable Switches** in inches (and millimeters)

**REFLOW TEMPERATURE PROFILE:**


## ORDERING INFORMATION: Non-Washable Switches

<p>Thru-Hole and Gull Wing</p> <p><b>95C06A2GWRT</b></p>	<p><b>Series</b>  <b>Size:</b> 06 = 6mm Square  <b>Height ("H"):</b> A = .169 (4,29), B = .197 (5,00), C = .276 (7,01), D = .374 (9,50), E = .512 (13,00)            F = .287 (7,29) for use with decorative caps  <b>RoHS compliant</b>  <b>Packaging:</b> Blank = Tube or bulk, R = Tape and Reel (see pkg note)  <b>Terminal Style:</b> Blank = Thru-hole, GW = Gull Wing  <b>Operating Force (Actuator Color):</b> 2 = 100g (Black), 3 = 160g (Brown), 4 = 260g (Red), 5 = 320g (Orange), 6 = 520g (Yellow)</p>
<p>Right Angle</p> <p><b>95C06A2RAT</b></p>	<p><b>Series</b>  <b>Size:</b> 06 = 6mm Square  <b>Height ("H"):</b> A = .124 (3,14), B = .152 (3,86), C = .230 (5,84), D = .329 (8,36), E = .467 (11,86)            F = .242 (6,15) for use with decorative caps  <b>RoHS compliant</b>  <b>Terminal Style:</b> RA = Right Angle  <b>Operating Force (Actuator Color):</b> 2 = 100g (Black), 3 = 160g (Brown), 4 = 260g (Red)</p>

**Packaging** Thru-Hole: Bulk, 1000 pcs/bag. Surface Mount: 77 pcs/tube, 1000 pcs/reel (.169" height), 900 pcs/reel (.197" height), 500 pcs/reel (.276" and .287" height), 380 pcs/reel (.374" height). Right Angle: Bulk, 1000 pcs/bag.

## SPECIFICATIONS:

### Non-Washable Switches

#### Materials

**Base:** UL94V-0 Nylon thermoplastic

**Cover:** Stainless steel, tin-plated steel

**Actuator:** UL94V-0 Nylon thermoplastic

**Terminal:** Brass with silver-plating

**Contact:** Stainless steel with silver-plating

**Cap:** Thermoplastic ABS

#### Electrical

**Rating:** 50mA, 12 Vdc

**Life:** 100g, 160g: 1,000,000 cycles;

260g: 500,000 cycles

320g, 520g, 300,000 cycles

**Actuator Travel:** .010" + .008"/ - .004"

**Contact Resistance:** 100 mΩ max.

**Insulation Resistance:** 100 MΩ min. at 500Vdc

**Dielectric Strength:** No dielectric breakdown after 250V for one minute

**Contact Arrangement:** single pole, single throw

#### Environmental

**Operating Temp. Range:** -25 to 70°C

**Storage Temp. Range:** -30 to 80°C

**Mechanical Shock:** MIL-STD-202F, Method 213B, Test Condition A. Gravity: 50G's (peak value), 11 msec. Direction and times: 6 sides and 3 times in each direction. High reliability.

**Vibration:** MIL-STD-202F, Method 201A. Passed 6 hours (2 hours in each) of three perpendicular planes at a cycle of 10-55-10Hz/minute. High reliability.

#### Soldering Process

**Hand Soldering:** Use a soldering iron of 30 watts, controlled at 350°C for 5 seconds maximum while applying solder.

**Reflow Soldering** (surface mount versions only): Peak temperature 260°C (500°F).

**Wave Soldering:** 260°C° (500°F) maximum for 5 seconds subject to PCB .063 in. (1,6mm) thickness.

#### Available from your local Grayhill Component Distributor.

For prices and discounts, contact a local Sales Office, an authorized local distributor, or Grayhill.

## DECORATIVE CAPS (for use with "F" style square actuators)

6mm SQUARE

figure 1

6mm ROUND

figure 2

PART NUMBER	SWITCH SIZE	SHAPE	COLOR	FIGURE
95CAP-000	6mm	SQUARE	YELLOW	1
95CAP-001	6mm	SQUARE	BLUE	1
95CAP-002	6mm	SQUARE	RED	1
95CAP-003	6mm	SQUARE	NATURAL	1
95CAP-004	6mm	SQUARE	BLACK	1
95CAP-005	6mm	SQUARE	GREEN	1
95CAP-006	6mm	SQUARE	ORANGE	1
95CAP-010	6mm	ROUND	YELLOW	2
95CAP-011	6mm	ROUND	BLUE	2
95CAP-012	6mm	ROUND	RED	2
95CAP-013	6mm	ROUND	NATURAL	2
95CAP-014	6mm	ROUND	BLACK	2
95CAP-015	6mm	ROUND	GREEN	2
95CAP-016	6mm	ROUND	ORANGE	2

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Grayhill:

[95CAP-014](#) [95C06A2RAT](#) [95C06A3RAT](#) [95C06B4GWT](#) [95C06C2RAT](#) [95C06C4GWRT](#) [95C06C4GWT](#)  
[95C06F2RAT](#) [95C06F3GWRT](#) [95C06F4GWRT](#) [95C06C5T](#) [95C06B6GWRT](#) [95C06A4RAT](#) [95C06E3RAT](#)  
[95C06A5T](#) [95C06E4GWRT](#) [95C06D2GWRT](#) [95C06E4GWT](#) [95C06F2T](#) [95C06B6GWT](#) [95C06C5GWT](#) [95C06D4T](#)  
[95C06F5GWRT](#) [95C06B4RAT](#) [95C06E6GWRT](#) [95C06A4GWT](#) [95C06D3T](#) [95C06E2T](#) [95C06B2GWRT](#) [95C06D5T](#)  
[95CAP-002](#) [95C06D2T](#) [95C06B5GWT](#) [95C06B5T](#) [95C06C3GWT](#) [95C06D4RAT](#) [95C06F3GWT](#) [95CAP-004](#)  
[95C06F5GWT](#) [95C06A4LT](#) [95C06A2GWRT](#) [95CAP-015](#) [95C06C3RAT](#) [95C06E3T](#) [95CAP-000](#) [95CAP-011](#)  
[95C06B6T](#) [95C06A5GWRT](#) [95C06F3RAT](#) [95C06F4GWT](#) [95C06D6T](#) [95C06A3GWRT](#) [95C06F3T](#) [95C06A2GWT](#)  
[95C06E4T](#) [95CAP-012](#) [95C06F2GWRT](#) [95CAP-010](#) [95C06C2GWRT](#) [95C06D4GWRT](#) [95C06B3RAT](#) [95C06C4T](#)  
[95C06E5T](#) [95C06A6GWT](#) [95CAP-001](#) [95C06A4GWRT](#) [95C06D4GWT](#) [95C06E2GWT](#) [95CAP-005](#) [95C06D2RAT](#)  
[95C06A3T](#) [95CAP-013](#) [95C06B2RAT](#) [95C06F4T](#) [95C06C6T](#) [95C06F6GWRT](#) [95C06F2GWT](#) [95C06B4T](#)  
[95C06C2T](#) [95C06B2GWT](#) [95C06D3GWRT](#) [95C06A5GWT](#) [95C06D5GWT](#) [95C06D3GWT](#) [95C06A6GWRT](#)  
[95C06F4RAT](#) [95C06C4RAT](#) [95C06E2RAT](#) [95C06C2GWT](#) [95C06D3RAT](#) [95C06E3GWT](#) [95C06B5GWRT](#)  
[95C06B2T](#) [95C06A4T](#) [95C06D2GWT](#) [95C06A2T](#) [95C06E4RAT](#) [95C06B3T](#) [95C06B3GWRT](#) [95C06C3T](#)